

# TCV7113F

## Evaluation Board Manual

This document provides the usage considerations for the evaluation board of DC-DC Converter IC TCV7113F.

### Safety Precautions

This manual important precautions which users of semiconductor devices (and anyone else) should observe in order to avoid injury to human body and damage to property, and to ensure safe and correct use of our products. Please be sure that you understand the meanings of the labels and graphic symbols described below before you move on to the detailed descriptions of the precautions, and comply with the precautions stated.

<b>⚠ CAUTION</b>	
 Prohibited	Do not touch the device and its heat sink while the device is on or immediately after the device has been turned off. Devices and Heat sinks become hot. Contact to the heat sink may result in a burn.
 Prohibited	Do not touch the lead tips of a device. Some devices have leads with sharp tips. Contact to sharp tips may result in a puncture wound.

### Summary

This is the evaluation circuit board which mounted DC-DC Converter IC TCV7113F. Inductor, capacitor and resistor required in order to operate IC are mounted. And it can operate such as DC-DC converter, if input voltage ( $V_{IN}$ ) is impressed. Moreover, the thing for which an input-and-output filter capacitor is added and operation is checked, and the soft-start time can be extended by adding an external capacitor ( $C_{SS}$ ).


### Board Specification

Content	Specification
Board size	75mm × 75mm × 1.6mm
Copper foil	Double-sided board 35 μm
Quality of the material	Glass epoxy (FR-4)

### Usage Precautions

- The input voltage, output voltage, output current and temperature conditions should be considered when selecting capacitors, inductors and resistors. These components should be evaluated on an actual system prototype for best selection.
- Parts of this product in the surrounding are examples of the representative, and the supply might become impossible. Please confirm latest information when using it.

## Evaluation Board Schematic

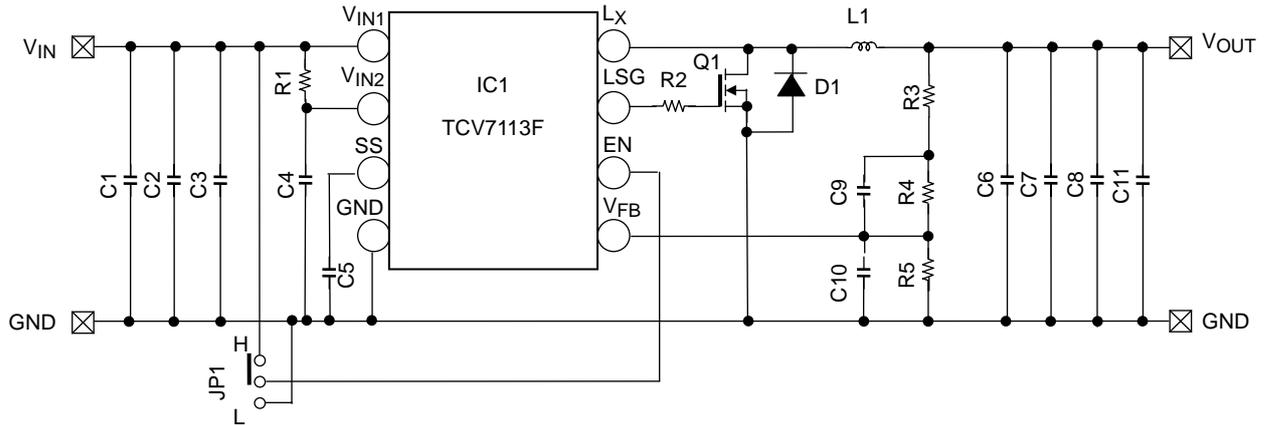

## Directions for Use

- Connect the  $V_{IN}$  and GND pins to an electric source.
- Connect the  $V_{OUT}$  and GND pins to electric load.
- TCV7113F will be operated when EN pin is connected with H side of JP1.
- When soft-start time should be adjusted, connect the capacitor (C5) of arbitrary capacity between SS and GND pins.


## Component List

Description	Ref	Manufacturer	Part Number	Value
DC-DC Converter IC	IC1	TOSHIBA	TCV7113F	-
MOSFET	Q1	TOSHIBA	SSM6K411TU	-
Schottky Barrier Diode	D1	TOSHIBA	CRS30I30A	-
Input Filter Capacitor $C_{IN}$	C1	-	-	-
Input Filter Capacitor $C_{IN}$	C2	Murata	GRM21BB30J226M	22 $\mu$ F
Input Filter Capacitor $C_{IN}$	C3	Murata	GRM21BB30J226M	22 $\mu$ F
Input Filter Capacitor $C_{IN}$	C4	Murata	GRM188B11A105K	1 $\mu$ F
Soft-Start Capacitor $C_{SS}$	C5	-	-	-
Output Filter Capacitor $C_{OUT}$	C6	Murata	GRM21BB30J226M	22 $\mu$ F *1
Output Filter Capacitor $C_{OUT}$	C7	Murata	GRM21BB30J226M	22 $\mu$ F *1
Output Filter Capacitor $C_{OUT}$	C8	Murata	GRM21BB30J226M	22 $\mu$ F *1
Feedback Resistor $C_{FB1}$	C9	-	-	-
Feedback Resistor $C_{FB2}$	C10	-	-	-
Output Filter Capacitor $C_{OUT}$	C11	-	-	-
Resistor	R1	KOA	RK73Z1J	Jumper Resistor
Resistor	R2	KOA	RK73Z1J	Jumper Resistor
Resistor	R3	KOA	RK73Z1J	Jumper Resistor
Feedback Resistor $R_{FB1}$	R4	KOA	RK73H1E	*2
Feedback Resistor $R_{FB2}$	R5	KOA	RK73H1E	*2
Inductor L	L1	TDK	CLF7045T-1R0N	1.0 $\mu$ H


\*1 : An Output Filter Capacitor changes with setting values of output voltage. Refer to the following table(Page 3).

\*2 : A Feedback Resistor changes with setting values of output voltage. Refer to the following table(Page3).


## Board Layout

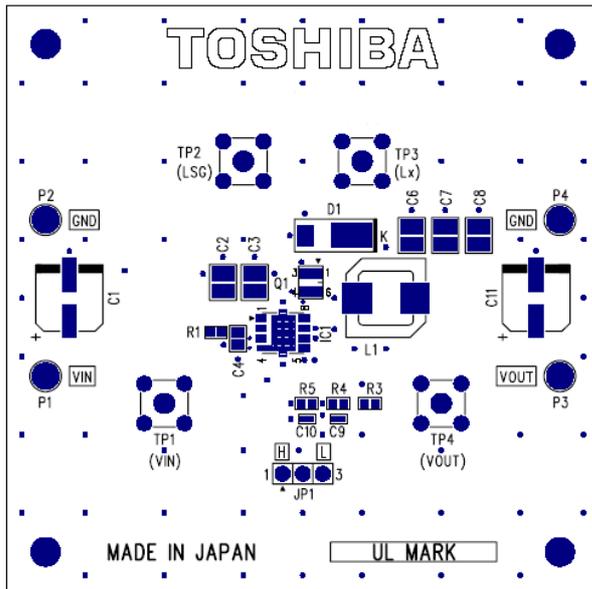


Top Silk Layer

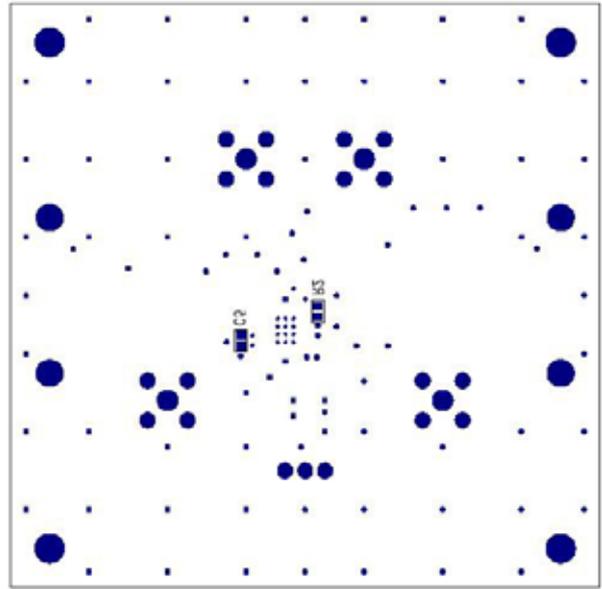

Bottom Silk Layer

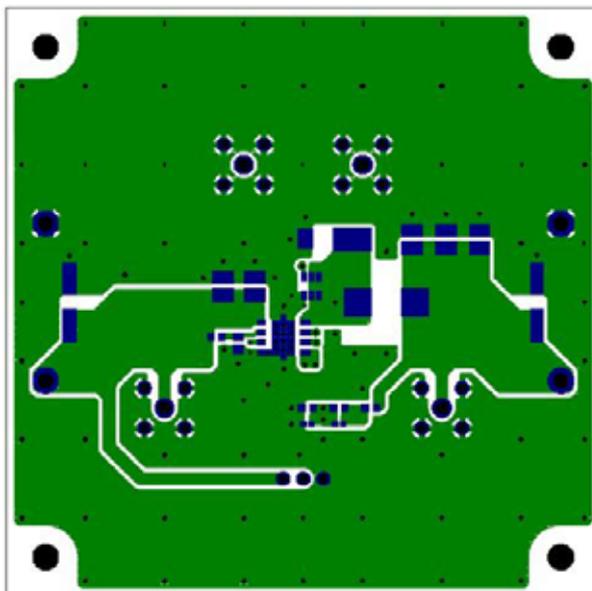

Top Layer

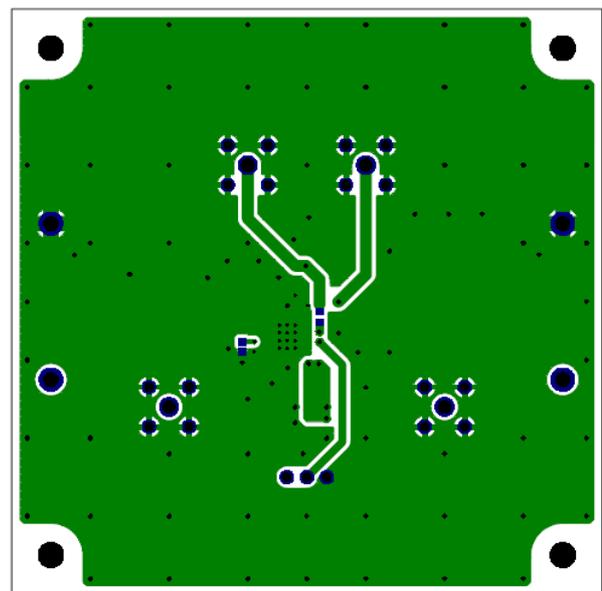

Bottom Layer

### Example of Component Values (For Reference Only)

V <sub>OUT</sub>	R <sub>FB1</sub> (R4)	R <sub>FB2</sub> (R5)	C <sub>OUT</sub>
0.9 V	5.1 kΩ	39 kΩ	66 μF
1.0 V	7.5 kΩ	30 kΩ	66 μF
1.1 V	7.5 kΩ	20 kΩ	66 μF
1.2 V	7.5 kΩ	15 kΩ	66 μF
1.51 V	16 kΩ	18 kΩ	66 μF
1.8 V	15 kΩ	12 kΩ	66 μF
2.5 V	5.1 kΩ	2.4 kΩ	44 μF
3.3 V	7.5 kΩ	2.4 kΩ	44 μF

**RESTRICTIONS ON PRODUCT USE**

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact ("Unintended Use"). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.