

FIBER OPTIC TRANSCEIVING MODULE

TODX2701A(F)

○ FIBER OPTIC TRANSCEIVING MODULE FOR HIGH SPEED

- For PN (JIS F07) type fiber optic connector
- Data rate:20 Mb/s to 125 Mb/s
- Transmission distance:Up to 20 m (125 Mb/s, APF)
Up to 100 m (125 Mb/s, GI-PCF)
- Transmitting IC and optical receiving IC built-in
- Compatible with 3.3 V PECL Level
- 650 nm LED
- Resin molded type

1. Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Storage Temperature	T _{stg}	-40 to 85	°C
Operating Temperature	T _{opr}	-10 to 70	°C
Supply Voltage	V _{cc}	-0.5 to 4.5	V
Output Current	I _o	50	mA
Soldering Temperature	T _{sol}	260 (Note 1)	°C

Note 1: Soldering time ≤ 10 s (More than 1 mm apart from the package).

Using continuously heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/ current/ voltage, etc.) are within the absolute maximum ratings. Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/ "Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc.).

2. Operating Ranges

Characteristics	Symbol	Min	Typ.	Max	Unit
Supply Voltage	V _{cc}	3.0	3.3	3.6	V
Data Rate		20	-	125	Mb/s
Mark Ratio		-	50	-	%
Output Load	R _L	-	50	-	Ω

Start of commercial production
2015-06

3. Electrical and Optical Characteristics (Ta = 25°C, VCC = 3.3 V)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Data Rate		NRZ code (Note.2)	20	-	125	Mb/s
Transmission Distance		APF(Note.3), 125 Mb/s Using TODX2701A(F)	0.1	-	20	m
		GI-PCF(Note.4), 125 Mb/s Using TODX2701A(F)	0.1	-	100	m
Center Emission Wavelength	λ_c		-	650	-	nm
Fiber Output Power (Note 5)	Pf(H)	APF 1 m	-12.0	-	- 8.0	dBm
	Pf(L)	APF 1 m	-	-	-27.5	dBm
	Pf(H)	GI-PCF 1 m	-18.0	-	-11.5	dBm
	Pf(L)	GI-PCF 1 m	-	-	-32.5	dBm
Maximum Receivable Power (Note 6)	P _{MAX}	APF(Note.3), 125 Mb/s Using TODX2701A(F)	- 8.0	-	-	dBm
		GI-PCF(Note.4), 125 Mb/s Using TODX2701A(F)	-11.5	-	-	dBm
Minimum Receivable Power (Note 7)	P _{MIN}	APF(Note.3), 125 Mb/s Using TODX2701A(F)	-	-	-19.0	dBm
		GI-PCF(Note.4), 125 Mb/s Using TODX2701A(F)	-	-	-23.0	dBm
Current Consumption (T) (Note 8)	I _{CC(T)}		-	40	50	mA
Current Consumption (R) (Note 9)	I _{CC(R)}		-	45	60	mA
High Level Input Voltage	V _{IH}		V _{CC} -1.19	-	V _{CC} -0.59	V
Low Level Input Voltage	V _{IL}		V _{CC} -2.09	-	V _{CC} -1.49	V
High Level Output Voltage (Note 10)	V _{OH}	R _L =50 Ω	V _{CC} -1.15	-	V _{CC} -0.90	V
Low Level Output Voltage (Note 10)	V _{OL}	R _L =50 Ω	V _{CC} -1.79	-	V _{CC} -1.49	V
SD Assert Level (Note 11)	SDA	APF (Note.3), 125 Mb/s	-	-	-19.0	dBm
		GI-PCF (Note.4), 125 Mb/s	-	-	-23.0	dBm
SD Deassert Level (Note 12)	SDD	APF (Note.3), 125 Mb/s	-	-	-20.0	dBm
		GI-PCF (Note.4), 125 Mb/s	-	-	-24.0	dBm
High Level SD Output Voltage	V _{oSDH}		V _{CC} ×0.8	-	-	V
Low Level SD Output Voltage	V _{oSDL}		-	-	V _{CC} ×0.2	V

Note.2: LED is on when input signal is high level, it is off when low level.

High level output when optical flux is received. Low level output when it is not received.

The duty factor must be kept 25 to 75%.

Note.3: All Plastic Fiber (980 μm core / 1000 μm cladding, NA=0.5). Polished surface.

Note.4: GI-PCF (200 μm core / 230 μm cladding, NA=0.4). polished surface.

Note.5: 1 Mb/s duty 50%. Measured by standard optical fiber. Averaged value.

Note.6: 2⁷-1 pattern. BER≤10⁻⁹. Measured by standard optical module. Averaged Value.

Note.7: 2⁷-1 pattern. BER≤10⁻⁹. Measured by eye center. Measured by standard optical module. Averaged Value.

Note.8: Without output load current.


Note.9: Without output load current.

Note.10: High level output when high level optical flux is received, Low level output when low level optical flux is received.

Note.11: The value when SD output changes from L level to H level.

Note.12: The value when SD output changes from H level to L level.

4. Application Circuit

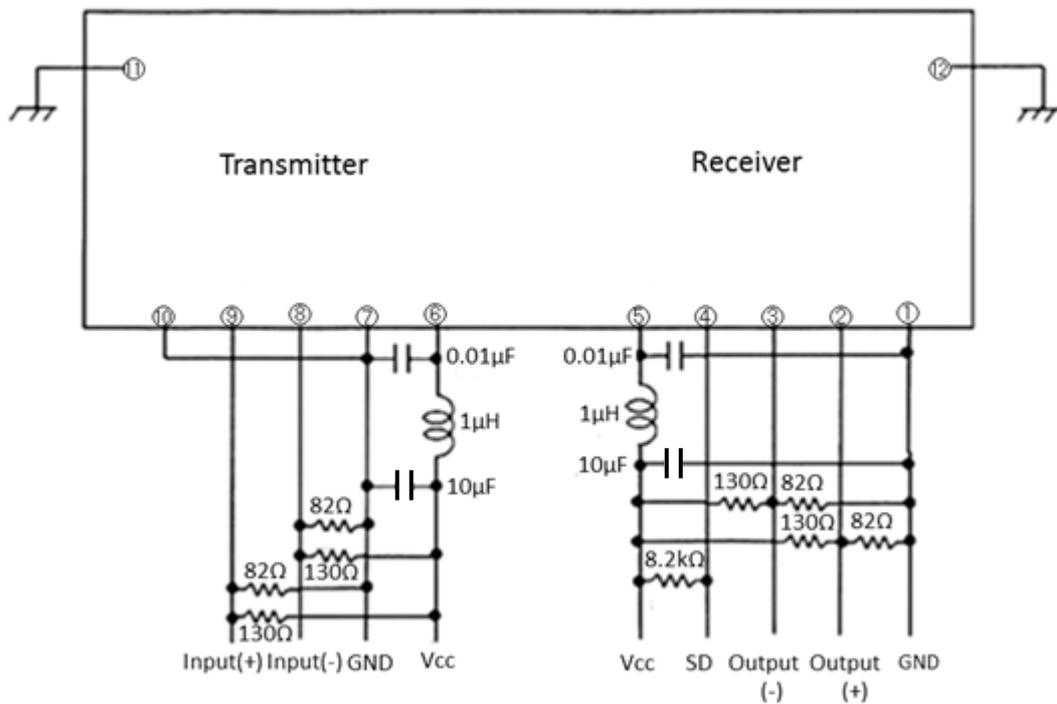

(Bottom View)

- Note.13: Place termination resistors near physical layer device data input pin.
 Make differential signal paths short and the same length.
 Use ground plane(or multi-layer)printed circuit board for best high frequency performance.
 Signal trace should be 50 Ω transmission lines(micro strip or strip line).
 Use high-frequency monolithic ceramic bypass capacitors and low DC resistance inductors.
 Do not directly connect optical transceiver's outputs to the GND without proper current limiting impedance.

5. Applicable Optical Fiber with Fiber Optic Connectors

- All Plastic Fiber (980 μm core / 1000 μm cladding, NA=0.5) with PN (F07) type connector. Polished surface.
- GI-PCF (200 μm core / 230 μm cladding, NA=0.4) with PN (F07) connector. polished surface.

6. Precautions during use

(1) Absolute maximum rating

The absolute maximum ratings are the limit values which must not be exceeded during operation of device. None of these rating value must not be exceeded. If the absolute maximum rating value is exceeded, the characteristics of devices may never be restored properly. In extreme cases, the device may be permanently damages.

(2) Operating Range

The operating range is the range of conditions necessary for the device to operate as specified in individual technical datasheets and databooks. Care must be exercised in the design of the equipment. If a device is used under conditions that do not exceed absolute maximum ratings but exceed the operating range, the specifications related to device operation and electrical characteristics may not be met, resulting in a decrease in reliability.

If greater reliability is required, derate the device's operating ranges for voltage, current, power and temperature before use.

(3) Lifetime of light emitters

If an optical module is used for a long period of time, degeneration in the characteristics will mostly be due to a lowering of the fiber output power (Pf). This is caused by the degradation of the optical output of the LEDs used as the light source. The cause of degradation of the optical output of the LEDs may be defects in wafer crystallization or mold resin stress. The detailed causes are, however, not clear.

The lifetime of light emitters is greatly influenced by the operating conditions and the environment in which it is used as well as by the lifetime characteristics unique to the device type. Thus, when a light emitting device and its operating conditions determined, Toshiba recommend that lifetime characteristics be checked.

Depending on the environment conditions, Toshiba recommend that maintenance such as regular checks of the amount of optical output in accordance with the condition of operating environment.

(4) Noise resistance

It is believed that the use of optical transfer device improve noise resistance. In theory, optical fiber is not affected by noise at all. However, receiving modules which handle signals whose level is extremely small, are susceptible to noise.

TOSLINK improve noise resistance to use a conductive case. However, the current signal output by the optical receiving modules' photodiode is extremely small. Thus, in some environments, shielding the case may not achieve sufficient noise resistance.

First systems which incorporate TOSLINK, Toshiba recommend testing using the actual device to check its noise resistance.

Use a simple noise filter on TOSLINK fiber optic transceiving module's power line. If the ripple in the power supply used is significant, reinforce the filter.

The optical module is to be used in an area which is susceptible to radiated noise, increase the shielding by covering the optical module and the power line filter with a metallic cover.

(5) Soldering

Optical modules are comprised of internal semiconductor devices. However, in principle, optical modules are optical components. During soldering, ensure that flux does not contact with the emitting surface or the detecting surface. Also ensure that proper flux removal is conducted after soldering.

Some optical modules come with a protective cap. The protective cap is used to avoid malfunction when the optical module is not in use. Note that it is not dust or waterproof.


As mentioned before, optical modules are optical components. Thus, in principle, soldering where there may be flux residue and flux removal after soldering is not recommended. Toshiba recommend that soldering be performed without the optical module mounted on the board. Then, after the board has been cleaned, the optical module should be soldered on to the board manually.

If the optical module cannot be soldered manually, use non-halogen (chlorine-free) flux and make sure, without cleaning, there is no residue such as chlorine. This is one of the ways to eliminate the effects of flux. In such a cases, be sure to check the devices' reliability.

- (6) **Vibration and shock**
This module is plastic sealed and has its wire fixed by resin. This structure is relatively resistant to vibration and shock. In actual equipment, there are some cases in which vibration, shock, or stress is applied to soldered parts or connected parts, resulting in lines cut. A care must be taken in the design of equipment which will be subject to high levels of vibration.
- (7) **Shielding and wiring pattern of fiber optic transceiving module**
To shield, connect the fixed pins (pins 11 and 12) of fiber optic transceiving module TODX2701A(F) to the GND.
Where the fiber optic transceiving module uses conductive resin, be careful that the case does not touch wiring (including land).
To improve noise resistance, shield the optical module and the power line filter using a metallic cover.
- (8) **Fixing fiber optical transceiving module**
Solder the fixed pin (pins 11 and 12) of fiber optic transceiving module TODX2701A (F) to the printed circuit board to fix the module to the board.
- (9) **Solvent**
When using solvent for flux removal, do not use a high acid or high alkali solvent. Be careful not to pour solvent in to the optical connector ports. If solvent is inadvertently poured in to them, clean it off using cotton tips.
- (10) **Protective cap**
When the fiber optic transceiving module TODX2701A(F) is not in use, attach the protective cap..
- (11) **An influence of flash or strong light**
Do not emit a flash or a strong light to the optical module directly they may cause an error in data transmission.
- (12) **Supply Voltage**
Use the supply voltage within the recommended operating condition ($V_{CC}=3.3\pm 0.3$ V). Make sure that Supply voltage does not exceed the maximum rating value of 4.5 V, even for an instant.
- (13) **Soldering condition**
Solder at 260°C or less for no more than ten seconds.
- (14) **Precautions when disposing of devices and packing materials.**
When disposing devices and packing materials, follow the procedures stipulated by local regulations in order to protect the environment against contamination.

7. Package Outline drawing

Unit: mm

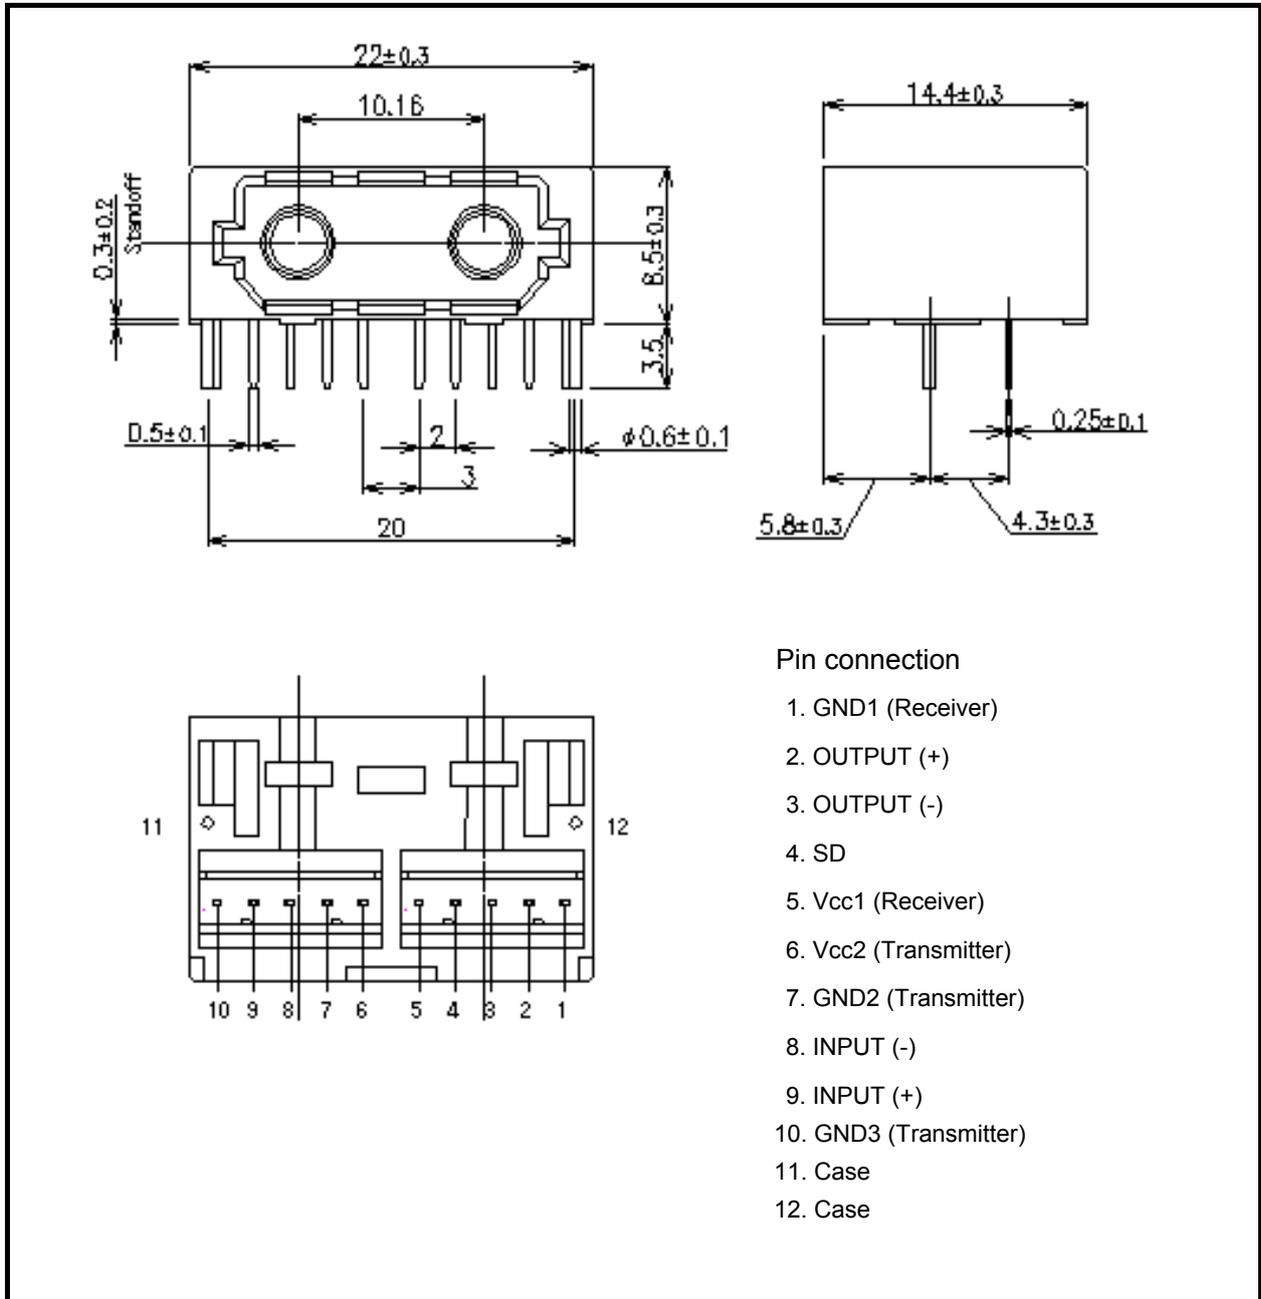

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**