

Bipolar Transistors Terms used in data sheets

Description

This document describes the terms used in data sheets bipolar transistors.

Table of Contents

Description.....	1
Table of Contents.....	2
1. Glossary.....	3
1.1. Absolute maximum ratings.....	3
1.2. Electrical Characteristics.....	4
1.3. Other terms.....	7
RESTRICTIONS ON PRODUCT USE.....	8

1. Glossary

1.1. Absolute maximum ratings

Term	Symbol	Description
Collector-base voltage	V_{CBO}	The maximum allowable voltage between the collector and base terminals when the emitter terminal is open-circuited
Collector-emitter voltage	V_{CEO}	The maximum allowable voltage between the collector and emitter terminals when the base terminal is open-circuited
	V_{CER}	The maximum allowable voltage between the collector and emitter terminals when a resistor is connected between the base and emitter terminals
	V_{CEX}	The maximum allowable voltage in the cut-off state between the collector and emitter terminals with reverse bias applied between the base and emitter terminals
	V_{CES}	The maximum allowable voltage between the collector and emitter terminals in the cut-off state when the base and emitter terminals are short-circuited
Emitter-base voltage	V_{EBO}	The maximum allowable voltage in the cut-off state between the emitter and base terminals when the collector terminal is open-circuited
Collector current (DC)	I_C	The maximum allowable continuous current into the collector terminal
Collector current (pulsed)	I_{CP}	The maximum allowable pulsed current into the collector terminal
Emitter current	I_E	The maximum allowable continuous current into the emitter terminal
Base current	I_B	The maximum allowable continuous current into the base terminal
Collector power dissipation	P_C	The maximum allowable power dissipated across the collector and emitter terminals
Junction temperature	T_j	The maximum allowable temperature at the junction of the transistor
Storage temperature	T_{stg}	The ambient temperature range over which the device, without any voltage applied, can be stored and transported

1.2. Electrical Characteristics

Term	Symbol	Description
Collector-base breakdown voltage	$V_{(BR)CBO}$	The breakdown voltage between the collector and base terminals under specified test conditions when the emitter terminal is open-circuited
Collector-emitter breakdown voltage	$V_{(BR)(CEO)}$	The breakdown voltage between the collector and emitter terminals under specified test conditions when the base terminal is open-circuited
	$V_{(BR)CER}$	The breakdown voltage between the collector and emitter terminals under specified test conditions when a resistor is connected between the base and emitter terminals
	$V_{(BR)CEX}$	The breakdown voltage between the collector and emitter terminals under specified test conditions when a reverse bias is applied between the base and emitter terminals
	$V_{(BR)CES}$	The breakdown voltage between the collector and emitter terminals under specified test conditions when the base and emitter terminals are short-circuited
Emitter-base breakdown voltage	$V_{(BR)EBO}$	The breakdown voltage between the emitter and base terminals under specified test conditions when the collector terminal is open-circuited
Collector-base cut-off current	I_{CBO}	The current in the cut-off state that flows into the collector terminal under specified test conditions when a voltage is applied across the collector and base terminals with the emitter terminal open-circuited
Collector-emitter cut-off current	I_{CEO}	The current in the cut-off state that flows into the collector terminal under specified test conditions when a voltage is applied between the collector and emitter terminals with the base terminal open-circuited
Emitter-base cut-off current	I_{EBO}	The current in the cut-off state that flows into the emitter terminal under specified test conditions when a voltage is applied between the emitter and base terminals with the collector terminal open-circuited
DC current gain	h_{FE}	The ratio of the collector current to the base current in a common-emitter configuration under specified test conditions DC current gain = collector current / base current


Term	Symbol	Description
Collector-emitter saturation voltage	$V_{CE(sat)}$	The voltage between the collector and emitter terminals in the saturation state under specified test conditions
Base-emitter saturation voltage	$V_{BE(sat)}$	The voltage between the base and emitter terminals in the saturation state under specified test conditions
Collector output capacitance	C_{ob}	The capacitance between collector and base at the specified collector-base voltage and frequency when the emitter terminal is open-circuited
Emitter input capacitance	C_{ib}	The capacitance value between emitter and base at the specified emitter-base voltage and frequency when the base terminal is grounded
Reverse capacitance	C_{re}	The capacitance value when the input is ac short-circuited and the emitter terminal is grounded
Transition frequency	f_T	The frequency at which the current gain is 1 (= 0 dB) when the emitter is grounded
Noise figure	NF	The ratio of the input signal-to-noise ratio to the output signal-to-noise ratio of a device. NF is calculated as: $NF = 10 \log \left[\frac{(S/N)_{in}}{(S/N)_{out}} \right]^2$

Term	Symbol	Description	
Delay time	t_d	The period of time from when the base current has reached 10% of its maximum amplitude to when the collector-emitter voltage has reached 90% of its maximum amplitude, or the period of time required for the collector current to reach 10% of its maximum amplitude	<p>Definition of collector-emitter voltage (V_{CE})</p> <p>V_{CE}': Maximum amplitude of V_{CE}</p>
Rise time	t_r	The period of time required for the collector-emitter voltage to decrease from 90% to 10% of its maximum amplitude, or the period of time required for the collector current to increase from 10% to 90% of its maximum amplitude	
Turn-on time	t_{on}	The period of time from when the base current has reached 10% of its maximum amplitude to when the collector-emitter voltage has reached 10% of its maximum amplitude, or the period of time required for the collector current to reach 90% of its maximum amplitude	<p>Definition of collector current (I_C)</p> <p>I_C': Maximum amplitude of I_C</p>
Storage time	t_{stg}	The period of time from when base current has dropped to 90% of its maximum amplitude to when the collector-emitter voltage has reached 10% of its maximum amplitude, or the period of time from when the base current has dropped to 90% of its maximum amplitude to when the collector-emitter voltage has reached 90% of its maximum amplitude	

Term	Symbol	Description
Fall time	t_f	The period of time required for the collector-emitter voltage to increase from 10% to 90% of its maximum amplitude, or the period of time required for the collector current to decrease from 90% to 10% of its maximum amplitude
Turn-off time	t_{off}	The period of time from when the base current has reached 90% of its maximum amplitude to when the collector-emitter voltage has reached 90% of its maximum amplitude, or the time required for the collector current to reach 10% of its maximum amplitude

1.3. Other terms

Term	Description
Cut-off region	The region where almost no collector current flows when the base and emitter are open-circuited, short-circuited, or reverse-biased
Active region	The region where the collector current changes in proportion to the base current applied
Saturation region	In this region, even if the base current is increased or decreased, the collector current on the load line hardly changes (Point A in the figure) and the collector current changes only when the collector-emitter voltage is changed.
Forward-bias safe operating area	The region specified by the collector current and collector-emitter voltage conditions where a transistor operates without self-damage when the base-emitter is forward-biased
Reverse-bias safe operating area	The region bounded by the collector current and collector-emitter voltage conditions where a transistor can safely transition to the cut-off region from the "on" state without self-damage when the base-emitter is reverse-biased

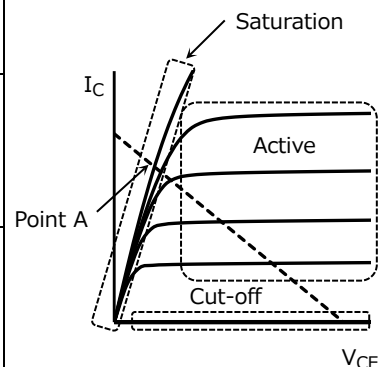

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

TOSHIBA ELECTRONIC DEVICES & STORAGE CORPORATION

<https://toshiba.semicon-storage.com/>