

32-bit RISC Microcontroller

TXZ+ Family

Reference Manual

12-bit Analog to Digital Converter
(ADC-H)

Revision 1.1

2021-03

TOSHIBA ELECTRONIC DEVICES & STORAGE CORPORATION

Contents

Preface	5
Related document.....	5
Conventions	6
Terms and Abbreviations	8
1. Outlines	9
2. Configuration.....	11
3. Function and Operation	12
3.1. Clock Supply	12
3.2. Conversion Operation	12
3.2.1. Operation.....	13
3.2.2. Control Registers.....	15
3.2.3. Conversion start procedure	15
3.3. Conversion Stop	18
3.4. Start-up Priority	19
3.5. AD Monitor Function	20
3.6. Analog Reference Voltage	22
3.7. Conversion Time	23
3.7.1. Conversion timing.....	23
3.7.2. Sampling time.....	23
3.7.2.1. Selection of sampling time.....	24
3.7.3. Setting of Conversion time	24
4. Equivalent Circuit	25
5. Registers	26
5.1. List of Registers	26
5.2. Details of Registers	28
5.2.1. [ADxCR0] (Control Register0)	28
5.2.2. [ADxCR1] (Control Register1)	29
5.2.3. [ADxST] (Status Register)	30
5.2.4. [ADxCLK] (Clock Setting Register).....	31
5.2.5. [ADxMOD0] (Mode Setting Register0).....	32
5.2.6. [ADxMOD1] (Mode Setting Register1).....	32
5.2.7. [ADxMOD2] (Mode Setting Register2).....	32
5.2.8. [ADxCMPEN] (Monitor Function Enable Register)	33
5.2.9. [ADxCMPCR0] (Monitor Function Setting Register0)	33
5.2.10. [ADxCMPCR1] (Monitor Function Setting Register1)	34
5.2.11. [ADxCMPCR2] (Monitor Function Setting Register2)	35
5.2.12. [ADxCMPCR3] (Monitor Function Setting Register3)	36
5.2.13. [ADxCMP0] (Conversion Result Comparison Register0).....	37
5.2.14. [ADxCMP1] (Conversion Result Comparison Register1).....	37
5.2.15. [ADxCMP2] (Conversion Result Comparison Register2).....	37
5.2.16. [ADxCMP3] (Conversion Result Comparison Register3).....	37

5.2.17. [ADxEXAZSEL] (AIN Sampling Time Selection Register)	38
5.2.18. [ADxTSET0] (Start-up Factor Program Register0)	39
5.2.19. [ADxREG0] (Conversion Result Storage Register0).....	40
6. Example of Usage.....	41
6.1. Single conversion.....	41
6.2. Highest priority conversion.....	42
7. Precaution	43
8. Revision History	44
RESTRICTIONS ON PRODUCT USE.....	45

List of Figures

Figure 1.1	Related figure of ADC and another peripheral function	10
Figure 2.1	ADC block diagram	11
Figure 3.1	Start-up factor and operation (Example)	13
Figure 3.2	AD monitor function (Determination condition: Continuous count)	21
Figure 3.3	AD monitor function (Determination condition: Accumulated count).....	21
Figure 3.4	Configuration of Analog reference voltage	22
Figure 3.5	Example of Conversion timing	23
Figure 4.1	Equivalent Circuit of analog input pin	25

List of Tables

Table 2.1	List of Signals	11
Table 3.1	Start-up factor	12
Table 3.2	Factor and interrupt / DMA request	14
Table 3.3	Operation when the start-up factor occurs during the conversion.....	19
Table 3.4	Monitor function and interrupt	20
Table 3.5	SCLK period condition value (n)	23
Table 3.6	Example of setting of sampling time (Unit: μs)	23
Table 3.7	Example of setting of conversion time (Unit: μs)	24
Table 8.1	Revision History	44

Preface

Related document

Document name
Input/Output Ports
Exception
Clock Control and Operation Mode
Product Information

Conventions

- Numeric formats follow the rules as shown below:
Hexadecimal: 0xABC
Decimal: 123 or 0d123 – Only when it needs to be explicitly shown that they are decimal numbers.
Binary: 0b111 – It is possible to omit the "0b" when the number of bit can be distinctly understood from a sentence.
- "_N" is added to the end of signal names to indicate low active signals.
- It is called "assert" that a signal moves to its active level, "deassert" to its inactive level.
- When two or more signal names are referred, they are described like as [m: n].
Example: S[3: 0] shows four signal names S3, S2, S1 and S0 together.
- The characters surrounded by [] defines the register.
Example: [ABCD]
- "n" substitutes suffix number of two or more same kind of registers, fields, and bit names.
Example: [XYZ1], [XYZ2], [XYZ3] → [XYZn]
- "x" substitutes suffix number or character of units and channels in the Register List.
In case of unit, "x" means A, B, and C ...
Example: [ADACR0], [ADBCR0], [ADCCR0] → [ADxCR0]
In case of channel, "x" means 0, 1, and 2 ...
Example: [T32A0RUNA], [T32A1RUNA], [T32A2RUNA] → [T32AxRUNA]
- The bit range of a register is written like as [m: n].
Example: Bit[3: 0] expresses the range of bit 3 to 0.
- The configuration value of a register is expressed by either the hexadecimal number or the binary number.
Example: [ABCD]<EFG> = 0x01 (hexadecimal), [XYZn]<VW> = 1 (binary)
- Word and Byte represent the following bit length.

Byte:	8 bits
Half word:	16 bits
Word:	32 bits
Double word:	64 bits
- Properties of each bit in a register are expressed as follows:

R:	Read only
W:	Write only
R/W:	Read and Write are possible
- Unless otherwise specified, register access supports only word access.
- The register defined as reserved must not be rewritten. Moreover, do not use the read value.
- The value read from the bit having default value of "—" is unknown.
- When a register containing both of writable bits and read-only bits is written, read-only bits should be written with their default value, in the cases that default is "—", follow the definition of each register.
- Reserved bits of the Write-only register should be written with their default value.
In the cases that default is "—", follow the definition of each register.
- Do not use read-modified-write processing to the register of a definition which is different by writing and read out.

All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.

Terms and Abbreviations

Some of abbreviations used in this document are as follows:

ADC	Analog to Digital Converter
TRGSEL	Trigger Selection circuit

1. Outlines

The 12-bit analog to digital converter (ADC) can convert multiple analog inputs (AINx00 to AINx23) to digital in each unit. The function list is shown as follows:

Function classification	Function	Operation explanation
AD conversion	Conversion resolution	12 bits
	Conversion time	AVDD3 = 2.7 to 3.6 [V]: 1.0 to 5.0 [μ s] Minimum conversion time condition: 1.0 [μ s] at SCLK=30 [MHz]
	Sampling time	Two types of sampling time can be set, and sampling time can be selected for each AIN channel.
	Store conversion result	24 conversion result storage registers.
Start conversion	Highest start-up factor	- Highest priority trigger - Highest priority conversion operation (software) Start-up factor program (Note1) can perform up to 24 AD conversions at each start-up.
	General purpose start-up factor	- General purpose trigger conversion - Software (Continuous conversion operation, Single conversion operation) Start-up factor program (Note1) can perform up to 24 AD conversions at each start-up.
Conversion status	Status flags	- Flag showing that the AD conversion is executing. - Flag showing that the program is executing (for each trigger). - Conversion result storage flag (for each conversion result storage register). - Conversion result overrun flag (for each conversion result storage register).
Interrupt	-	- Highest priority program AD conversion completion (INTADxHP) - General purpose trigger program completion (INTADxTRG) - Software single conversion program completion (INTADxSGL) - Software continuous conversion program completion (INTADxCNT) - Monitor function interrupt (INTADxCP0, INTADxCP1, INTADxCP2, INTADxCP3) (Note2)
Monitor conversion result	AD monitor function	- Each ADC unit has 4 channels of monitor function. - Selectable conversion result storage register to be monitored. - Selectable detection method: Whether the target register value is larger or smaller than the comparison register. - Selectable number of detections. - Selectable continuous count and accumulated count.

Note1: Conversion program can specify conversion channel (analog input) and enable / disable of interrupt. There are multiple programs. Each is started with the start-up factor / trigger.

Note2: For the channel of the AD monitor function, refer to "Product Information" of the reference manual.

Figure 1.1 shows the connection relationships with the peripheral functions that are linked with the ADC. AD conversion can be started from general trigger, highest priority trigger, etc.

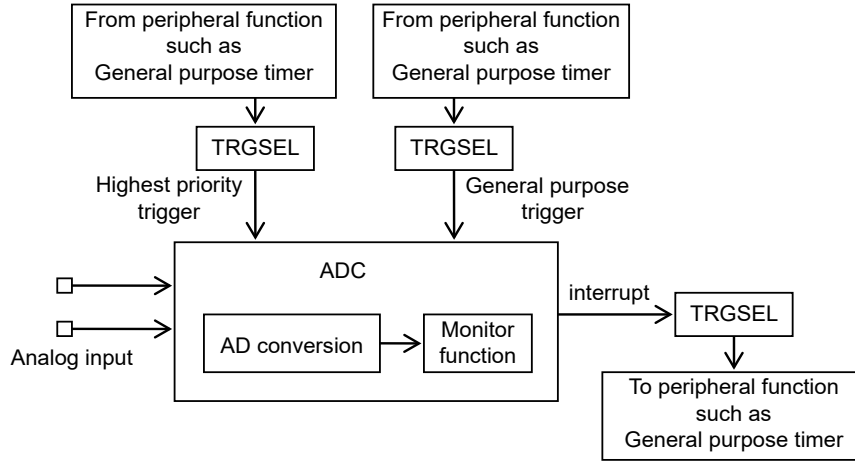


Figure 1.1 Related figure of ADC and another peripheral function

2. Configuration

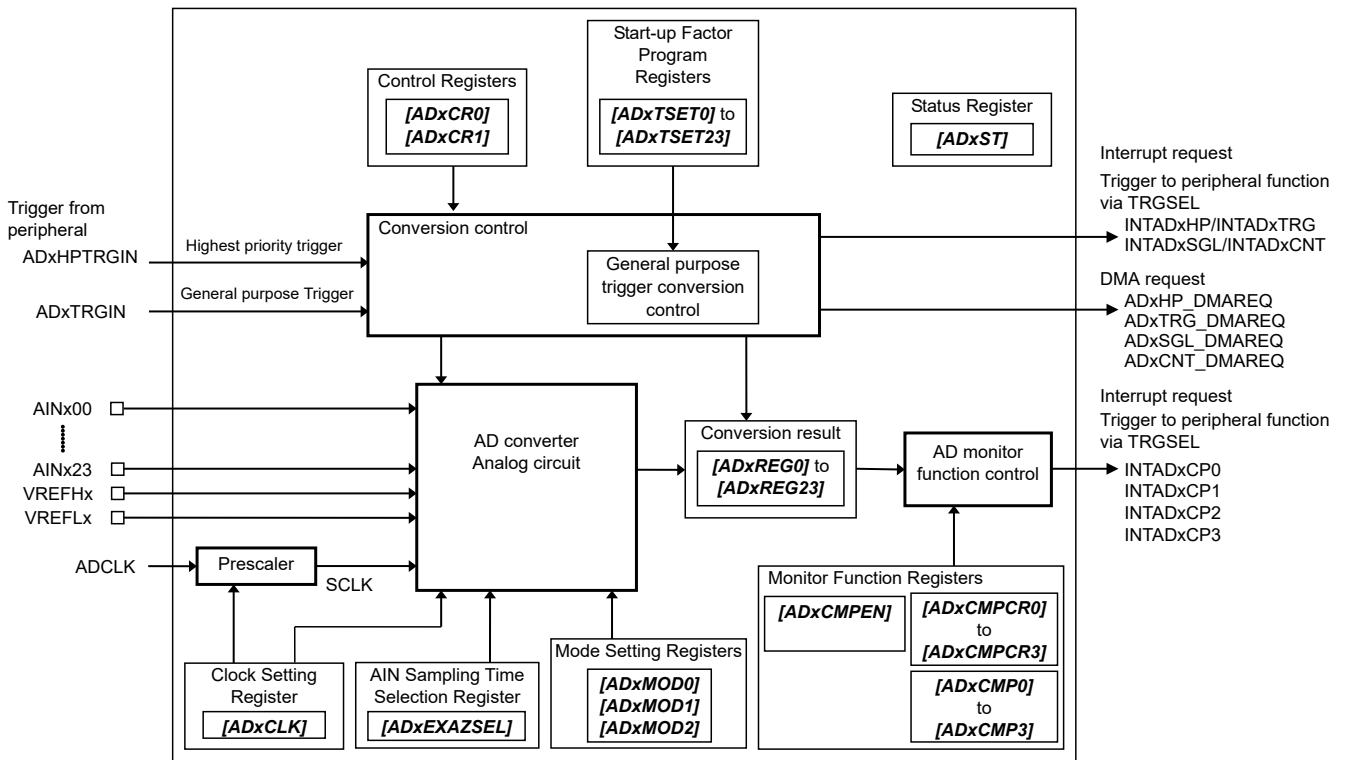


Figure 2.1 ADC block diagram

Table 2.1 List of Signals

No	Signal symbol	Signal name	I/O	Related Reference manual
1	ADCLK	Conversion clock for ADC	Input	Clock Control and Operation Mode
2	AINx00 to AINx23	Analog input pin	Input	Product Information, Input/Output Ports
3	VREFHx	Reference power pin for analog	Input	Product Information
4	VREFLx	Reference GND pin for analog	Input	Product Information
5	ADxHPTRGIN	Highest priority trigger input	Input	Product Information
6	ADxTRGIN	General purpose trigger	Input	Product Information
7	INTADxHP	Highest priority conversion completion interrupt	Output	Exception, Product Information
8	INTADxTRG	General purpose trigger interrupt	Output	Exception, Product Information
9	INTADxSGL	Single conversion interrupt	Output	Exception, Product Information
10	INTADxCNT	Continuous conversion interrupt	Output	Exception, Product Information
11	INTADxCP0	Monitor function0 interrupt	Output	Exception, Product Information
12	INTADxCP1	Monitor function1 interrupt	Output	Exception, Product Information
13	INTADxCP2	Monitor function2 interrupt	Output	Exception, Product Information
14	INTADxCP3	Monitor function3 interrupt	Output	Exception, Product Information
15	ADxHP_DMAREQ	Highest priority DMA request	Output	Product Information
16	ADxTRG_DMAREQ	General purpose trigger DMA request	Output	Product Information
17	ADxSGL_DMAREQ	Single conversion DMA request	Output	Product Information
18	ADxCNT_DMAREQ	Continuous conversion DMA request	Output	Product Information

3. Function and Operation

The ADC is triggered to start the conversion by the software start-up (Software trigger) or the trigger signal from a timer, and others.

3.1. Clock Supply

When using ADC, set an applicable clock enable bit to "1" (clock supply) in Clock supply and stop register A for fsys (*JCGFSYSENA*, *JCGFSYSMENA*), Clock supply and stop register B for fsys (*JCGFSYSENB*, *JCGFSYSMENB*), Clock supply and stop register C for fsys (*JCGFSYSMENC*), and Clock supply and stop register for fc (*JCGFCEN*). Set the ADC conversion clock enable bit to "1" in Clock supply and stop register for ADC and Debug circuit (*JCGSPCLKEN*).

An applicable register and the bit position vary according to a product. Therefore, the register may not exist with the product. Please refer to "Clock Control and Operation Mode" of the reference manual for the details.

When stopping the clock supply, check that AD conversion has stopped. And when changing the operation mode to STOP1/STOP2, check that AD conversion has stopped.

3.2. Conversion Operation

The conversion is started by the highest priority start-up factor and the general purpose start-up factor.

The highest priority start-up factor is the factor to start up the highest priority conversion. It has two conversion start-up operations (the highest priority trigger and the highest priority conversion operation). And the general purpose start-up factor has three start-up operations (a general purpose trigger, a single conversion operation, and continuous conversion operation).

Table 3.1 Start-up factor

Highest priority start-up factor	General purpose start-up factor
(a) Highest priority conversion - Highest priority trigger - Highest priority conversion operation (software)	(b) General purpose trigger (c) Single conversion operation (software) (d) Continuous conversion operation (software)

Note: (a) to (d) start-up factors are shown in Figure 3.1

3.2.1. Operation

When the conversion is triggered by start-up factor, the conversion executes according to the setting in start-up factor program register which is prepared for each conversion result register.

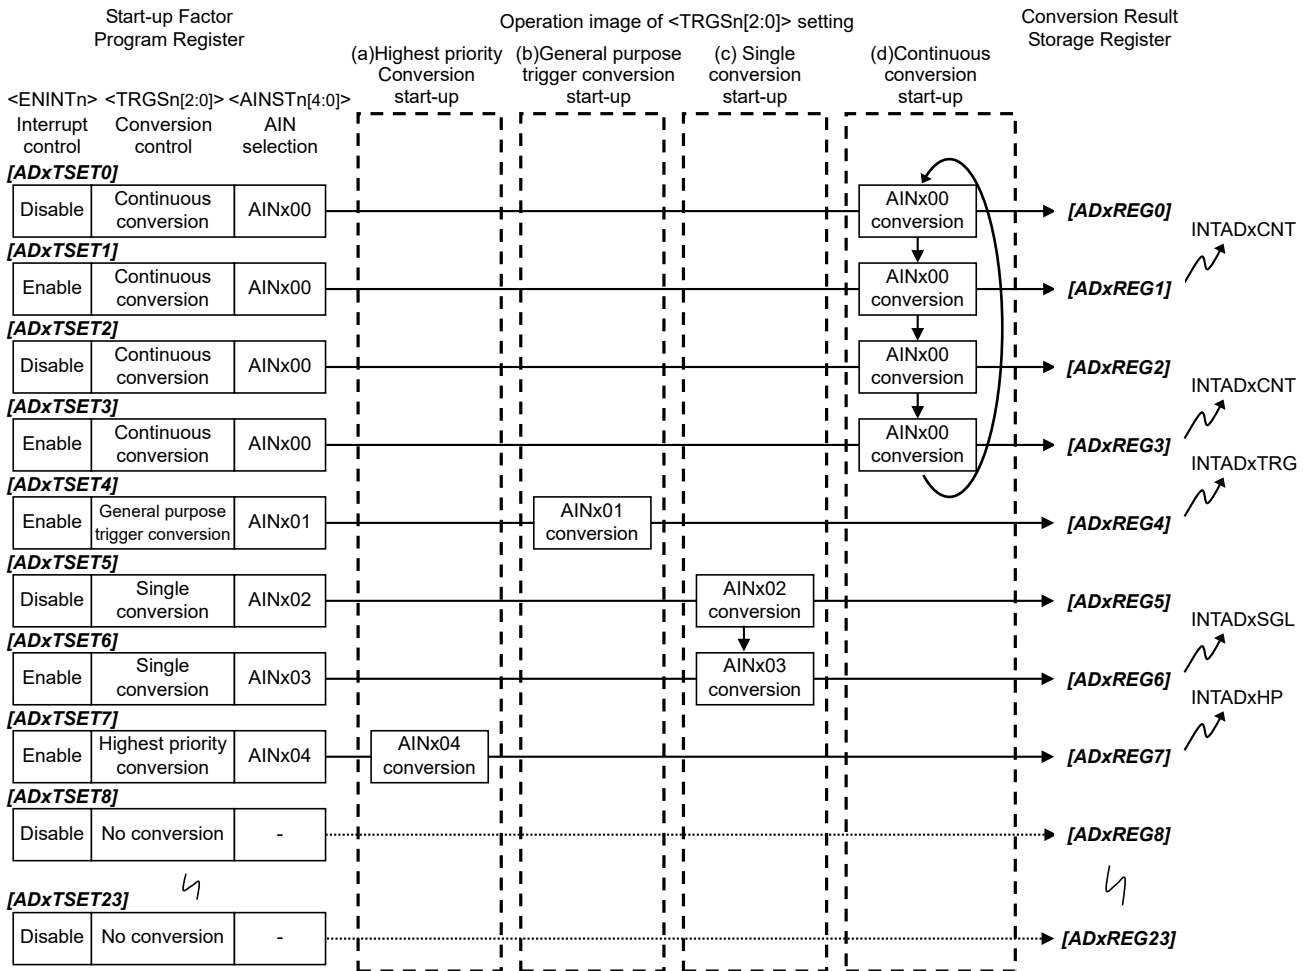


Figure 3.1 Start-up factor and operation (Example)

The start-up factor selection (Conversion control), the AIN selection, and the interrupt enable or disable (Interrupt control) are programmed to the start-up factor program register. When the start-up factor occurs, the specified conversions are executed from the smallest number of the start-up factor program registers.

- (a) Highest priority conversion
 The highest priority conversion is started by the following two factors.
 The highest priority trigger conversion:
 When the highest priority trigger is input, the conversion which is specified to the highest priority is executed once.
 The highest conversion start-up (software):
 The conversion which is specified to the highest priority is executed once, too.
- (b) General purpose trigger conversion
 For general purpose trigger conversion, when a general purpose trigger is input, the conversion specified for general purpose trigger conversion is executed once.
- (c) Single conversion operation (software)
 Single conversion executes the conversion specified for single conversion once.
- (d) Continuous conversion operation (software)
 Continuous conversion operation iteratively executes the conversion specified for continuous conversion.

When the interrupt is enabled ($[ADxTSETn] \langle ENINTn \rangle = 1$), the interrupt is generated at the conversion completion for any trigger causes (Highest priority conversion, General purpose trigger, Single conversion, Continuous conversion). The interrupt request of each start-up factor (INTADxHP, INTADxTRG, INTADxSGL, INTADxCNT) is different from others.

The start-up factor can generate a DMA request per cause. When a DMA request is enabled ($[ADxCRI] \langle HPDMEN \rangle, \langle CNTDMEN \rangle, \langle SGLDMEN \rangle, \langle TRGDMEN \rangle = 1$), a DMA request and an interrupt request are generated simultaneously.

Table 3.2 Factor and interrupt / DMA request

Factor	Interrupt	DMA request
Highest priority conversion	Highest priority conversion completion interrupt (INTADxHP)	Highest priority DMA request (ADxHP_DMAREQ)
General purpose trigger conversion	General purpose trigger interrupt (INTADxTRG)	General purpose trigger DMA request (ADxTRG_DMAREQ)
Single conversion operation (software)	Single conversion interrupt (INTADxSGL)	Single conversion DMA request (ADxSGL_DMAREQ)
Continuous conversion operation (software)	Continuous conversion interrupt (INTADxCNT)	Continuous conversion DMA request (ADxCNT_DMAREQ)

3.2.2. Control Registers

- Start-up factor program register (*[ADxTSET0]* to *[ADxTSET23]*)

Start-up factor program register is prepared for each conversion result storage register. The AIN select <AINSTn[4:0]>, the conversion control <TRGSn[2:0]>, and the interrupt control <ENINTn> of *[ADxTSETn]* are set.
- Mode setting register0 (*[ADxMOD0]*)

When using the ADC, set *[ADxMOD0]*<DACON> to "1". And the interval of 3[μs] are necessary for the stabilization.
- Control register0 (*[ADxCR0]*)

When the AD conversion can be started, after setting, *[ADxCR0]*<ADEN> should be set to "1".

The software single conversion or the software continuous conversion is enabled by setting *[ADxCR0]*<SGL> or <CNT> to "1". When the continuous conversion should be stopped, <CNT> is set to "0".

Also, when starting the highest priority conversion by software, write "1" to *[ADxCR0]*<HPSGL>.
- Control register1 (*[ADxCRI]*)

[ADxCRI]<TRGEN> enables the trigger, and then the program start-up is done by the general purpose trigger. The conversion starts when a trigger is received. *[ADxCRI]*<SGLDMEN>, <CNTDMEN>, <TRGDMEN> are set to "1" to enable the DMA request generation.

To enable the program to be activated by the highest priority trigger, write "1" to *[ADxCRI]*<HPTRGEN>. In this state, conversion is started when a trigger is input. To enable generation of DMA request, write "1" to *[ADxCRI]*<HPDMEN>.

Note: *[ADxCRI]* register must be set while *[ADxCR0]*<ADEN> = 0.

3.2.3. Conversion start procedure

To start the conversion operation, set the register in the following procedure.

- Highest priority trigger conversion

 - Set interrupt to use INTADxHP.
 - Set *[ADxMOD0]*<DACON> to "1".
 - Wait at least 3[μs].
 - Set *[ADxCRI]*<HPTRGEN> to "1".
 - Sets what trigger to use for the highest priority trigger (ADxHPTRGIN). (Note)
 - Set *[ADxTSETn]*. AIN selection <AINSTn[4:0]> = arbitrary, conversion control <TRGSn[2:0]> = 1xx, interrupt control <ENINTn> = 1.
 - To activate the highest priority trigger using multiple channels, set (6) with another AIN selection again.
 - Set *[ADxCR0]*<ADEN> to "1".
 - When you input a trigger, conversion starts.
 - When conversion is complete, INTADxHP will be generated. Read *[ADxREGn]* in the interrupt service routine.
 - Repeat steps (9) to (10).

Note: For details of the signal connected to the highest priority trigger (ADxHPTRGIN), refer to "Product Information" of the reference manual.

- Highest priority conversion
 - (1) Set interrupt to use INTADxHP.
 - (2) Set $[ADxMOD0]<DACON>$ to "1".
 - (3) Wait at least 3[μ s].
 - (4) Set $[ADxTSETn]$. AIN selection $<AINSTn[4:0]>$ = arbitrary, conversion control $<TRGSn[2:0]>$ = 1xx, interrupt control $<ENINTn>$ = 1.
 - (5) To perform the highest priority conversion using multiple channels, set (4) with another AIN selection again.
 - (6) Set $[ADxCR0]<ADEN>$ to "1".
 - (7) Set $[ADxCR0]<HPSGL>$ to "1", starts the conversion.
 - (8) When conversion is complete, INTADxHP will be generated. Read $[ADxREGn]$ in the interrupt service routine.
 - (9) Repeat steps (7) to (8).

- General purpose trigger conversion
 - (1) Set interrupt to use INTADxTRG.
 - (2) Set $[ADxMOD0]<DACON>$ to "1".
 - (3) Wait at least 3[μ s].
 - (4) Set $[ADxCRI]<TRGEN>$ to "1".
 - (5) Sets what trigger to use for the general purpose trigger (ADxTRGIN). (Note)
 - (6) Set $[ADxTSETn]$. AIN selection $<AINSTn[4:0]>$ = arbitrary, conversion control $<TRGSn[2:0]>$ = 011, interrupt control $<ENINTn>$ = 1.
 - (7) To activate the general purpose trigger using multiple channels, set (6) with another AIN selection again.
 - (8) Set $[ADxCR0]<ADEN>$ to "1".
 - (9) When you input a trigger, conversion starts.
 - (10) When conversion is complete, INTADxTRG will be generated. Read $[ADxREGn]$ in the interrupt service routine.
 - (11) Repeat steps (9) to (10).

Note: For details of the signal connected to the general purpose trigger (ADxTRGIN), refer to "Product Information" of the reference manual.

- Single conversion operation
 - (1) Set interrupt to use INTADxSGL.
 - (2) Set $[ADxMOD0]<DACON>$ to "1".
 - (3) Wait at least 3[μ s].
 - (4) Set $[ADxTSETn]$. AIN selection $<AINSTn[4:0]>$ = arbitrary, conversion control $<TRGSn[2:0]>$ = 010, interrupt control $<ENINTn>$ = 1.
 - (5) To perform the Single conversion using multiple channels, set (4) with another AIN selection again.
 - (6) Set $[ADxCR0]<ADEN>$ to "1".
 - (7) Set $[ADxCR0]<SGL>$ to "1", starts the conversion.
 - (8) When conversion is complete, INTADxSGL will be generated. Read $[ADxREGn]$ in the interrupt service routine.
 - (9) Repeat steps (7) to (8).

- Continuous conversion
 - (1) Set interrupt to use INTADxCNT.
 - (2) Set *[ADxMOD0]*<DACON> to "1".
 - (3) Wait at least 3[μs].
 - (4) Set *[ADxTSETn]*. AIN selection <AINSTn[4:0]> = arbitrary, conversion control <TRGSn[2:0]> = 001, interrupt control <ENINTn> = 1.
 - (5) To perform the continuous conversion using multiple channels, set (4) with another AIN selection again.
 - (6) Set *[ADxCRO]*<ADEN> to "1".
 - (7) Set *[ADxCRO]*<CNT> to "1", starts the conversion.
 - (8) When conversion is complete, INTADxCNT will be generated. Read *[ADxREGn]* in the interrupt service routine.
 - (9) Repeat steps (8).

3.3. Conversion Stop


When $[ADxCR0]<ADEN>$ is set to "0", the conversion stops immediately. If the continuous conversion is enabled, $[ADxCR0]<CNT>$ should be also set to "0".

When the conversion stops completely, all bits in $[ADxST]$ become "0". The registers other than $[ADxST]$ keep their data, as well as the conversion result registers. Before the next conversion is enabled, the conversion result registers should be read to clear the corresponding flags.

When stopping ADCLK, AD conversion stop processing should be performed. Please confirm that $[ADxST]<CNTF>$, $<SNGF>$, $<TRGF>$, $<HPF>$ become all "0" and stop ADCLK.

3.4. Start-up Priority

The start-up factors are prioritized as follows:

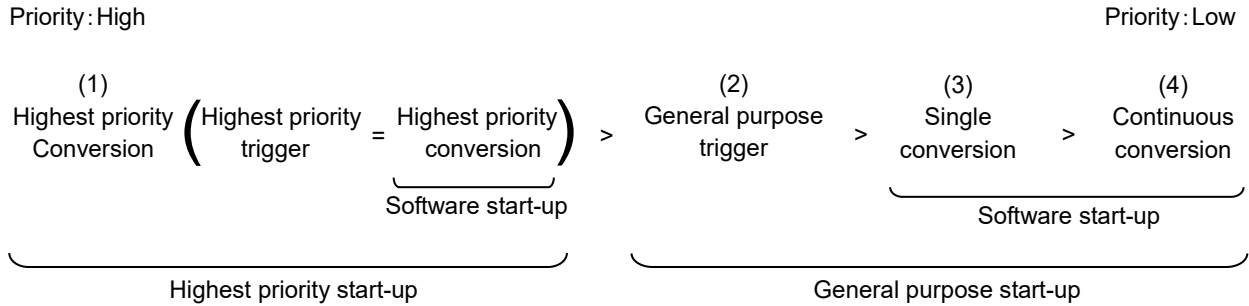

Once a Highest priority conversion program starts to execute, it is never suspended.

In general purpose trigger, single conversion, and continuous conversion programs, when a higher priority factor is generated, execution of the current conversion program is interrupted and a conversion program with a higher priority is executed. When a lower priority factor occurs, it waits for execution.

The conversion programs of suspended general purpose trigger, single conversion, continuous conversion re-starts from suspended conversion when they become executable.

When the start-up factor is generated again during execution of the conversion program of the same start-up factor, the factor is ignored. The status of the conversion program can be checked by $[ADxST]<CNTF>$, $<SNGF>$, $<TRGF>$, $<HPF>$. For the software start-up factors, it should be confirmed whether the corresponding flags are "0". Then, the start-up is certainly executed.

Table 3.3 Operation when the start-up factor occurs during the conversion

		Later start-up factor			
		Highest priority conversion	General purpose trigger	Software Single conversion	Software Continuous conversion
Current start-up factor during conversion	Highest priority conversion	Continue current factor (Note2)	Continue current factor (Note1)	Continue current factor (Note1)	Continue current factor (Note1)
	General purpose trigger	Start later factor (Note3)	Continue current factor (Note2)	Continue current factor (Note1)	Continue current factor (Note1)
	Software Single conversion	Start later factor (Note3)	Start later factor (Note3)	Continue current factor (Note2)	Continue current factor (Note1)
	Software Continuous conversion	Start later factor (Note3)	Start later factor (Note3)	Start later factor (Note3)	Continue current factor (Note2)

Note1: The later factor is performed after the current factor is completed.

Note2: The later factor is ignored.

Note3: The current factor is suspended. And then, the current factor re-starts after the later factor is completed.

3.5. AD Monitor Function

The AD monitor function generates an interrupt if the AD conversion result is larger than or smaller than the set value. It is possible to detect whether the AD conversion result is within the range of four set values or to detect whether the AD conversion result is out of the range by using this function simultaneously in four channels.

When $[ADxCMPEN]<CMP0EN>$, $<CMP1EN>$, $<CMP2EN>$ or $<CMP3EN>$ is set to "1", the corresponding AD monitor function is enabled. The four monitor functions can be enabled simultaneously.

The following description is for $[ADxCMPCR0]$ (The same for $[ADxCMPCR1]$, $[ADxCMPCR2]$ and $[ADxCMPCR3]$).

$[ADxCMPCR0]<REGS0[4:0]>$ sets the conversion result storage register which value should be compared. $<ADBIG0>$ sets the determination condition (larger or smaller). $<CMPCND0>$ sets the determination count condition. And $<CMPCNT0[3:0]>$ sets the determination count value.

Whenever a conversion result is stored to the target conversion result storage register, the result is compared (larger or smaller). If the comparison result is the same as the $<ADBIG0>$ setting, the determination counter increments.

The determination count condition is either the continuous count or the accumulated count.

The continuous count condition is as follows: When the status set in $<ADBIG0>$ continues the count times set in $<CMPCNT0[3:0]>$, the AD monitor function interrupt (INTADxCP0) is generated. When it continues exceeding the set-up count number, nothing occurs. If the status is different from the $<ADBIG0>$ status, the counter is cleared.

The accumulated count condition is as follows: When the count of the status set in $<ADBIG0>$ is accumulated and the accumulated value reaches the value set in $<CMPCNT0[3:0]>$, the AD monitor function interrupt (INTADxCP0) is generated, and the counter is cleared. Even when the status is different from the status set in $<ADBIG0>$, the counter value is maintained. When the value in the conversion result storage register specified by the $[ADxCMPCR0]$ register is equal to the value in the conversion result comparison register, the counter does not increment and the AD monitor function interrupt and the trigger are not generated.

Table 3.4 Monitor function and interrupt

Monitor function	Interrupt
Monitor function Setting Register0 ($[ADxCMPCR0]$)	Monitor function0 Interrupt (INTADxCP0)
Monitor function Setting Register1 ($[ADxCMPCR1]$)	Monitor function1 Interrupt (INTADxCP1)
Monitor function Setting Register2 ($[ADxCMPCR2]$)	Monitor function2 Interrupt (INTADxCP2)
Monitor function Setting Register3 ($[ADxCMPCR3]$)	Monitor function3 Interrupt (INTADxCP3)

Note: For the handling of the interrupts, refer to "Product Information" of the reference manual.

When the AD monitor function is used, the overrun flag $[ADxREGn]<ADOVRFn>$ and the conversion result storage flag $[ADxREGn]<ADRFn>$ are set because the storage register is not read by the software. So, when the AD monitor function is executing, the flags of the corresponding conversion result storage registers should not be used.

Note: The monitor function registers must be set while $[ADxCR0]<ADEN>=0$.

(1) Determination by Continuous count

- Monitor function setting register0 ($[ADxCMPCR0] = 0x00000200$)
Conversion result storage register (Comparison target): $[ADxREG0]$
Magnitude determination: $[ADxREG0] < ADR0[11:0] > > [ADxCMP0] < ADCMP0[11:0] >$
(Larger than the comparison register.)
Determination count condition: Continuous count
Magnitude determination count: 3 counts
- AD conversion result comparison register0 ($[ADxCMP0] < ADCMP0[11:0] > = 0x888$)
- Monitor function enable register ($[ADxCMPEN] = 0x00000001$)

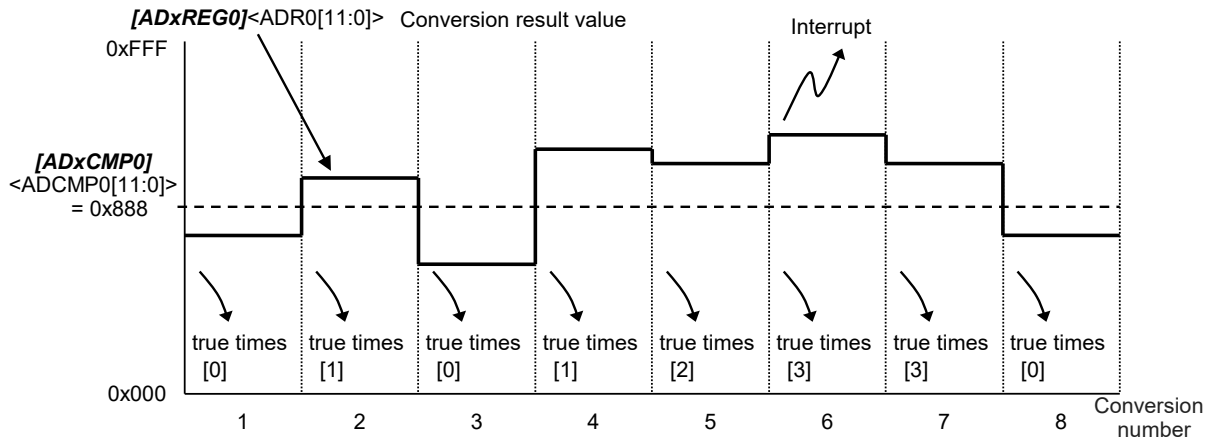


Figure 3.2 AD monitor function (Determination condition: Continuous count)

(2) Determination by Accumulated count

- Monitor function setting register0 ($[ADxCMPCR0] = 0x00000240$)
Conversion result storage register (Comparison target): $[ADxREG0]$
Magnitude determination: $[ADxREG0] < ADR0[11:0] > > [ADxCMP0] < ADCMP0[11:0] >$
(Larger than the comparison register.)
Determination count condition: Accumulated count
Magnitude determination count: 3 counts
- AD conversion result comparison register0 ($[ADxCMP0] < ADCMP0[11:0] > = 0x888$)
- Monitor function enable register ($[ADxCMPEN] = 0x00000001$)

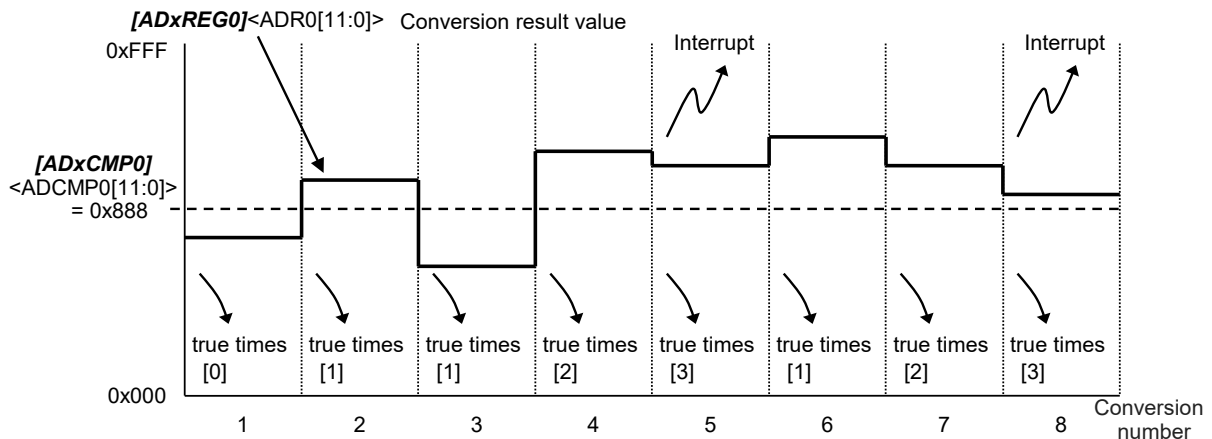


Figure 3.3 AD monitor function (Determination condition: Accumulated count)

3.6. Analog Reference Voltage

Analog reference voltage pins (VREFHx and VREFLx) in the ADC unit are connected to a High level and a Low level, respectively. When $[ADxMOD0]<RCUT>$ is set to "1", the switch between VREFHx and VREFLx is turned on only during the conversion to reduce the power consumption.

The VREFHx and VREFLx pins are shared with the AVDD3 and AVSS pins depending on the product. For details, refer to "Product Information" of the reference manual.

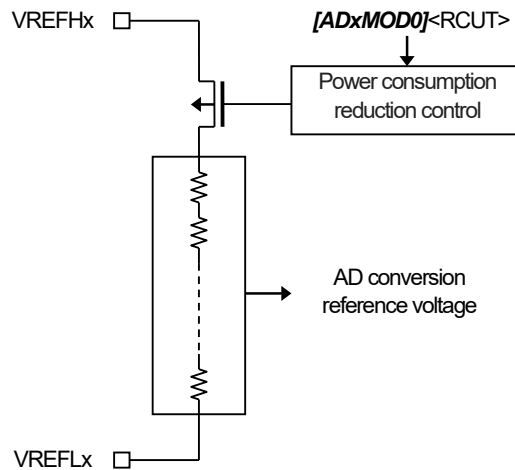


Figure 3.4 Configuration of Analog reference voltage

3.7. Conversion Time

3.7.1. Conversion timing

Conversion timing is shown in Figure 3.5.

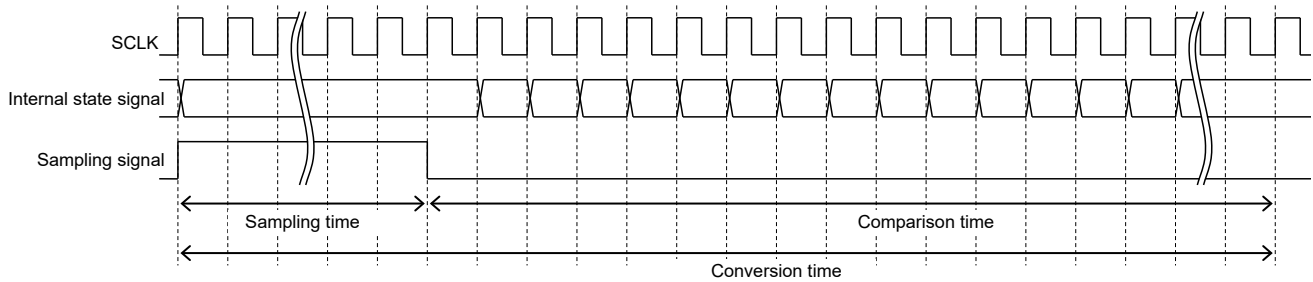


Figure 3.5 Example of Conversion timing

3.7.2. Sampling time

The sampling time is set with $[ADxCLK]\langle EXAZ0[3:0]\rangle$ or $\langle EXAZ1[3:0]\rangle$, $\langle VADCLK[2:0]\rangle$. Two types of AIN sampling time setting ($\langle EXAZ0[3:0]\rangle$, $\langle EXAZ1[3:0]\rangle$) can be selected for each AIN channel.

$$\text{Sampling time} = \text{SCLK period} \times m \times n$$

(m: $\langle EXAZ0[3:0]\rangle$ setting or $\langle EXAZ1[3:0]\rangle$ setting, n: SCLK period condition value)

The SCLK period condition value (n) has a different value depending on the SCLK period.
The SCLK period condition value (n) is shown in the table below.

Table 3.5 SCLK period condition value (n)

SCLK frequency	SCLK period condition value (n)
$SCLK \leq 20[\text{MHz}]$	5
$20[\text{MHz}] < SCLK \leq 25[\text{MHz}]$	7
$25[\text{MHz}] < SCLK \leq 30[\text{MHz}]$	8
$30[\text{MHz}] < SCLK \leq 40[\text{MHz}]$	10

An example of sampling time setting is shown in the table below.

Table 3.6 Example of setting of sampling time (Unit: μs)

SCLK (MHz)	$[ADxCLK]\langle EXAZ0[3:0]\rangle$ or $\langle EXAZ1[3:0]\rangle$			
	0000	0001	0010	0011
20	0.25	0.50	0.75	1.00
25	0.28	0.56	0.84	1.12
30	0.27	0.53	0.80	1.07
40	0.25	0.50	0.75	1.00

3.7.2.1. Selection of sampling time

Select the sampling time set by $[ADxCLK]<EXAZ0[3:0]>$ or $<EXAZ1[3:0]>$ for each AIN channel with the AIN sampling time selection register ($[ADxEXAZSEL]$).

3.7.3. Setting of Conversion time

The conversion time can be obtained by the following formula.

$$\text{Conversion time} = \text{Sampling time} + \text{Comparison time}$$

- (1) $SCLK \leq 30[\text{MHz}]$

$$\text{Conversion time} = \text{Sampling time} + (\text{SCLK period} \times 22) [\mu\text{s}]$$

Note: Refer to Table 3.6 for sampling time.

- (2) $30[\text{MHz}] < SCLK \leq 40[\text{MHz}]$

$$\text{Conversion time} = \text{Sampling time} + (\text{SCLK period} \times 36) [\mu\text{s}]$$

Note: Refer to Table 3.6 for sampling time.

Example of conversion time is shown below.

Table 3.7 Example of setting of conversion time (Unit: μs)

SCLK (MHz)	$[ADxCLK]<EXAZ0[3:0]>$ or $<EXAZ1[3:0]>$			
	0000	0001	0010	0011
20	1.35	1.60	1.85	2.10
25	1.16	1.44	1.72	2.00
30	1.00	1.27	1.53	1.80
40	1.15	1.40	1.65	1.90

4. Equivalent Circuit

The equivalent circuit of analog input pin is shown in Figure 4.1. Each constant is the design value.

1. Condition

- AVDD3 = 2.7 to 3.6V
- Load resistor of analog input pin: $\leq 600\Omega$
- Load capacitance of analog input pin: $\geq 0.1\mu\text{F}$
- Conversion time: $\geq 1.00\mu\text{s}$

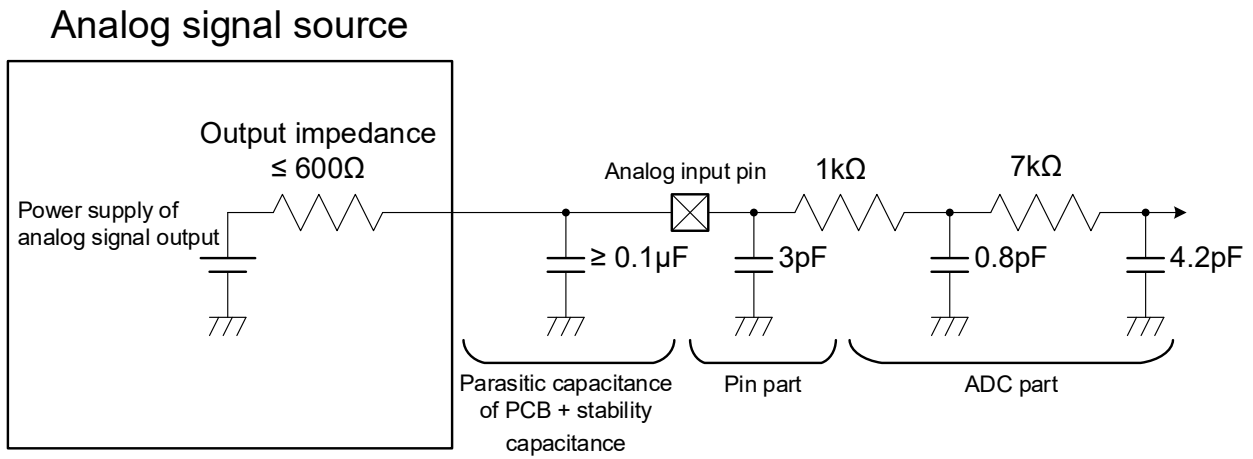


Figure 4.1 Equivalent Circuit of analog input pin

5. Registers

5.1. List of Registers

The control registers and their addresses are shown as follows:

Function		Channel/Unit	Base address	
			TYPE 1	TYPE 2
12-bit Analog to Digital Converter	ADC	Unit A	0x40050000	0x400BA000
		Unit B	0x40051000	0x400BA400
		Unit C	0x40052000	0x400BA800
		Unit D	0x40053000	0x400BAC00

Note: The Channel/Unit and Base address type are different by products. Please refer to "Product Information" of the reference manual for the details.

Register Name		Address (Base+)
Control Register0	[ADxCR0]	0x0000
Control Register1	[ADxCR1]	0x0004
Status Register	[ADxST]	0x0008
Clock Setting Register	[ADxCLK]	0x000C
Mode Setting Register0	[ADxMOD0]	0x0010
Mode Setting Register1	[ADxMOD1]	0x0014
Mode Setting Register2	[ADxMOD2]	0x0018
Monitor Function Enable Register	[ADxCMPEN]	0x0020
Monitor Function Setting Register0	[ADxCMPCR0]	0x0024
Monitor Function Setting Register1	[ADxCMPCR1]	0x0028
Conversion Result Comparison Register0	[ADxCMP0]	0x002C
Conversion Result Comparison Register1	[ADxCMP1]	0x0030
Monitor Function Setting Register2	[ADxCMPCR2]	0x0034
Monitor Function Setting Register3	[ADxCMPCR3]	0x0038
Conversion Result Comparison Register2	[ADxCMP2]	0x003C
Conversion Result Comparison Register3	[ADxCMP3]	0x0040
AIN Sampling Time Selection Register	[ADxEXAZSEL]	0x00BC
Start-up Factor Program Register0	[ADxTSET0]	0x00C0
Start-up Factor Program Register1	[ADxTSET1]	0x00C4
Start-up Factor Program Register2	[ADxTSET2]	0x00C8
Start-up Factor Program Register3	[ADxTSET3]	0x00CC
Start-up Factor Program Register4	[ADxTSET4]	0x00D0
Start-up Factor Program Register5	[ADxTSET5]	0x00D4
Start-up Factor Program Register6	[ADxTSET6]	0x00D8
Start-up Factor Program Register7	[ADxTSET7]	0x00DC
Start-up Factor Program Register8	[ADxTSET8]	0x00E0
Start-up Factor Program Register9	[ADxTSET9]	0x00E4
Start-up Factor Program Register10	[ADxTSET10]	0x00E8
Start-up Factor Program Register11	[ADxTSET11]	0x00EC

Register Name		Address (Base+)
Start-up Factor Program Register12	[ADxTSET12]	0x00F0
Start-up Factor Program Register13	[ADxTSET13]	0x00F4
Start-up Factor Program Register14	[ADxTSET14]	0x00F8
Start-up Factor Program Register15	[ADxTSET15]	0x00FC
Start-up Factor Program Register16	[ADxTSET16]	0x0100
Start-up Factor Program Register17	[ADxTSET17]	0x0104
Start-up Factor Program Register18	[ADxTSET18]	0x0108
Start-up Factor Program Register19	[ADxTSET19]	0x010C
Start-up Factor Program Register20	[ADxTSET20]	0x0110
Start-up Factor Program Register21	[ADxTSET21]	0x0114
Start-up Factor Program Register22	[ADxTSET22]	0x0118
Start-up Factor Program Register23	[ADxTSET23]	0x011C
Conversion Result Storage Register0	[ADxREG0]	0x0140
Conversion Result Storage Register1	[ADxREG1]	0x0144
Conversion Result Storage Register2	[ADxREG2]	0x0148
Conversion Result Storage Register3	[ADxREG3]	0x014C
Conversion Result Storage Register4	[ADxREG4]	0x0150
Conversion Result Storage Register5	[ADxREG5]	0x0154
Conversion Result Storage Register6	[ADxREG6]	0x0158
Conversion Result Storage Register7	[ADxREG7]	0x015C
Conversion Result Storage Register8	[ADxREG8]	0x0160
Conversion Result Storage Register9	[ADxREG9]	0x0164
Conversion Result Storage Register10	[ADxREG10]	0x0168
Conversion Result Storage Register11	[ADxREG11]	0x016C
Conversion Result Storage Register12	[ADxREG12]	0x0170
Conversion Result Storage Register13	[ADxREG13]	0x0174
Conversion Result Storage Register14	[ADxREG14]	0x0178
Conversion Result Storage Register15	[ADxREG15]	0x017C
Conversion Result Storage Register16	[ADxREG16]	0x0180
Conversion Result Storage Register17	[ADxREG17]	0x0184
Conversion Result Storage Register18	[ADxREG18]	0x0188
Conversion Result Storage Register19	[ADxREG19]	0x018C
Conversion Result Storage Register20	[ADxREG20]	0x0190
Conversion Result Storage Register21	[ADxREG21]	0x0194
Conversion Result Storage Register22	[ADxREG22]	0x0198
Conversion Result Storage Register23	[ADxREG23]	0x019C

5.2. Details of Registers

5.2.1. [ADxCR0] (Control Register0)

Bit	Bit Symbol	After Reset	Type	Function
31:8	-	0	R	Read as "0"
7	ADEN	0	R/W	ADC control. 0: Disabled 1: Enabled When this bit is set to "1", the conversion is enabled. When this bit is set to "0", the conversion stops.
6:3	-	0	R	Read as "0"
2	HPSGL	0	W	Highest priority conversion control 0: Don't care. 1: Conversion start. When this bit is set to "1", the highest priority conversion program starts to execute. If this bit is read, "0" is returned.
1	SGL	0	W	Single conversion control 0: Don't care. 1: Conversion start. When this bit is set to "1", the single conversion program starts to execute. If this bit is read, "0" is returned.
0	CNT	0	R/W	Continuous conversion control 0: Disabled 1: Enabled When this bit is set to "1", the continuous conversion starts to execute. This bit should be set to "1" while [ADxST]<CNTF> is "0" (a continuous conversion program does not execute).

5.2.2. [ADxCR1] (Control Register1)

Bit	Bit Symbol	After Reset	Type	Function
31:8	-	0	R	Read as "0"
7	HPDMEN	0	R/W	Highest priority conversion DMA request control 0: Disabled 1: Enabled
6	CNTDMEN	0	R/W	Continuous conversion DMA request control 0: Disabled 1: Enabled
5	SGLDMEN	0	R/W	Single conversion DMA request control 0: Disabled 1: Enabled
4	TRGDMEN	0	R/W	General purpose trigger DMA request control 0: Disabled 1: Enabled
3:2	-	0	R	Read as "0"
1	HPTRGEN	0	R/W	Highest priority trigger conversion start-up control 0: Disabled 1: Enabled
0	TRGEN	0	R/W	General purpose trigger start-up control 0: Disabled 1: Enabled

Note: This register must be set while [ADxCR0]<ADEN> =0.

5.2.3. [ADxST] (Status Register)

Bit	Bit Symbol	After Reset	Type	Function
31:8	-	0	R	Read as "0"
7	ADBF	0	R	AD operation flag 0: Stop (ADCLK can be stopped.) 1: Executing (ADCLK cannot be stopped.) Before ADCLK is stopped, this bit should be confirmed to be "0".
6:4	-	0	R	Read as "0"
3	CNTF	0	R	Continuous conversion program flag 0: Stop 1: Executing When the request is received, this bit becomes "1". When the last conversion result is stored, this bit becomes "0".
2	SNGF	0	R	Single conversion program flag 0: Stop 1: Executing (Note) When the request is received, this bit becomes "1". When the last conversion result is stored, this bit becomes "0".
1	TRGF	0	R	General purpose trigger program flag 0: Stop 1: Executing When the request is received, this bit becomes "1". When the last conversion result is stored, this bit becomes "0".
0	HPF	0	R	Highest priority conversion program flag 0: Stop 1: Executing When the request is received, this bit becomes "1". When the last conversion result is stored, this bit becomes "0".

Note: After [ADxCR0]<SGL> is set to "1", it changes after up to 5 SCLK clocks.

5.2.4. [ADxCLK] (Clock Setting Register)

Bit	Bit Symbol	After Reset	Type	Function
31:12	-	0	R	Read as "0"
11:8	EXAZ1[3:0]	0000	R/W	AIN sampling time setting 1 (Note2) 0000: SCLK period x n (m=1) 0001: SCLK period x 2n (m=2) 0010: SCLK period x 3n (m=3) 0011: SCLK period x 4n (m=4) Others: Reserved For the value of n, refer to "3.7.2. Sampling time".
7	-	0	R	Read as "0"
6:3	EXAZ0[3:0]	0000	R/W	AIN sampling time setting 0 (Note2) 0000: SCLK period x n (m=1) 0001: SCLK period x 2n (m=2) 0010: SCLK period x 3n (m=3) 0011: SCLK period x 4n (m=4) Others: Reserved For the value of n, refer to "3.7.2. Sampling time".
2:0	VADCLK[2:0]	000	R/W	AD prescaler output (SCLK) selection 000: ADCLK/2 001: ADCLK/4 010: ADCLK/8 011: ADCLK/16 100: ADCLK/3 101: ADCLK/5 110: ADCLK/6 111: ADCLK/10 This bit should be set so that SCLK is 40[MHz] or less.

Note1: This register must be set while [ADxCR0]<ADEN> =0.

Note2: Select AIN sampling time with [ADxEXAZSEL].

5.2.5. [ADxMOD0] (Mode Setting Register0)

Bit	Bit Symbol	After Reset	Type	Function
31:2	-	0	R	Read as "0"
1	RCUT	1	R/W	Low power mode selection 0: Normal operation 1: Low power operation (Energized between VREFHx and VREFLx only during the conversion)
0	DACON	0	R/W	DAC control (Note2) 0: OFF 1: ON When the ADC is used, <DACON> should be set to "1".

Note1: This register must be set while [ADxCR0]<ADEN> =0.

Note2: After [ADxMOD0]<DACON> is set to "1", the interval of 3[μs] are necessary for the stabilization.

5.2.6. [ADxMOD1] (Mode Setting Register1)

Bit	Bit Symbol	After Reset	Type	Function
31:0	MOD1[31:0]	0x00004000	R/W	Set the applicable value according to SCLK conditions. 0x00001000: (SCLK ≤ 20[MHz]) 0x00003000: (20[MHz] < SCLK ≤ 25[MHz]) 0x00004000: (25[MHz] < SCLK ≤ 30[MHz]) 0x00006011: (30[MHz] < SCLK ≤ 40[MHz]) Others: Reserved

Note: This register must be set while [ADxCR0]<ADEN> =0.

5.2.7. [ADxMOD2] (Mode Setting Register2)

Bit	Bit Symbol	After Reset	Type	Function
31:0	MOD2[31:0]	0x00000000	R/W	The setting value of this register varies depending on the product. For the setting value, refer to "Product Information" of the reference manual.

Note: This register must be set while [ADxCR0]<ADEN> =0.

5.2.8. [ADxCMPEN] (Monitor Function Enable Register)

Bit	Bit Symbol	After Reset	Type	Function
31:4	-	0	R	Read as "0"
3	CMP3EN	0	R/W	AD monitor function3 operation 0: Disabled. 1: Enabled.
2	CMP2EN	0	R/W	AD monitor function2 operation 0: Disabled. 1: Enabled.
1	CMP1EN	0	R/W	AD monitor function1 operation 0: Disabled. 1: Enabled.
0	CMP0EN	0	R/W	AD monitor function0 operation 0: Disabled. 1: Enabled.

5.2.9. [ADxCMPCR0] (Monitor Function Setting Register0)

Bit	Bit Symbol	After Reset	Type	Function
31:12	-	0	R	Read as "0"
11:8	CMPCNT0[3:0]	0000	R/W	Comparison count 0000: 1 1000: 9 0001: 2 1001: 10 0010: 3 1010: 11 0011: 4 1011: 12 0100: 5 1100: 13 0101: 6 1101: 14 0110: 7 1110: 15 0111: 8 1111: 16
7	-	0	R	Read as "0"
6	CMPCND0	0	R/W	Determination condition 0: Continuous count 1: Accumulated count
5	ADBIG0	0	R/W	Magnitude determination setting 0: Conversion result specified by <REGS0[4:0]> > [ADxCMP0] 1: Conversion result specified by <REGS0[4:0]> < [ADxCMP0]
4:0	REGS0[4:0]	00000	R/W	Compared conversion result storage register 00000: ADxREG0 01000: ADxREG8 10000: ADxREG16 00001: ADxREG1 01001: ADxREG9 10001: ADxREG17 00010: ADxREG2 01010: ADxREG10 10010: ADxREG18 00011: ADxREG3 01011: ADxREG11 10011: ADxREG19 00100: ADxREG4 01100: ADxREG12 10100: ADxREG20 00101: ADxREG5 01101: ADxREG13 10101: ADxREG21 00110: ADxREG6 01110: ADxREG14 10110: ADxREG22 00111: ADxREG7 01111: ADxREG15 10111: ADxREG23 11000 to 11111: Inhibited setting

Note: This register must be set while [ADxCMPEN]<CMP0EN> =0.

5.2.10. [ADxCMPCR1] (Monitor Function Setting Register1)

Bit	Bit Symbol	After Reset	Type	Function
31:12	-	0	R	Read as "0"
11:8	CMPCNT1[3:0]	0000	R/W	Comparison count 0000: 1 1000: 9 0001: 2 1001: 10 0010: 3 1010: 11 0011: 4 1011: 12 0100: 5 1100: 13 0101: 6 1101: 14 0110: 7 1110: 15 0111: 8 1111: 16
7	-	0	R	Read as "0"
6	CMPCND1	0	R/W	Determination condition 0: Continuous count 1: Accumulated count
5	ADBIG1	0	R/W	Magnitude determination setting 0: Conversion result specified by <REGS1[4:0]> > [ADxCMP1] 1: Conversion result specified by <REGS1[4:0]> < [ADxCMP1]
4:0	REGS1[4:0]	00000	R/W	Compared conversion result storage register 00000: ADxREG0 01000: ADxREG8 10000: ADxREG16 00001: ADxREG1 01001: ADxREG9 10001: ADxREG17 00010: ADxREG2 01010: ADxREG10 10010: ADxREG18 00011: ADxREG3 01011: ADxREG11 10011: ADxREG19 00100: ADxREG4 01100: ADxREG12 10100: ADxREG20 00101: ADxREG5 01101: ADxREG13 10101: ADxREG21 00110: ADxREG6 01110: ADxREG14 10110: ADxREG22 00111: ADxREG7 01111: ADxREG15 10111: ADxREG23 11000 to 11111: Inhibited setting

Note: This register must be set while [ADxCMPEN]<CMP1EN> =0.

5.2.11. [ADxCMP2] (Monitor Function Setting Register2)

Bit	Bit Symbol	After Reset	Type	Function
31:12	-	0	R	Read as "0"
11:8	CMPCNT2[3:0]	0000	R/W	Comparison count 0000: 1 1000: 9 0001: 2 1001: 10 0010: 3 1010: 11 0011: 4 1011: 12 0100: 5 1100: 13 0101: 6 1101: 14 0110: 7 1110: 15 0111: 8 1111: 16
7	-	0	R	Read as "0"
6	CMPCND2	0	R/W	Determination condition 0: Continuous count 1: Accumulated count
5	ADBIG2	0	R/W	Magnitude determination setting 0: Conversion result specified by <REGS2[4:0]> > [ADxCMP2] 1: Conversion result specified by <REGS2[4:0]> < [ADxCMP2]
4:0	REGS2[4:0]	00000	R/W	Compared conversion result storage register 00000: ADxREG0 01000: ADxREG8 10000: ADxREG16 00001: ADxREG1 01001: ADxREG9 10001: ADxREG17 00010: ADxREG2 01010: ADxREG10 10010: ADxREG18 00011: ADxREG3 01011: ADxREG11 10011: ADxREG19 00100: ADxREG4 01100: ADxREG12 10100: ADxREG20 00101: ADxREG5 01101: ADxREG13 10101: ADxREG21 00110: ADxREG6 01110: ADxREG14 10110: ADxREG22 00111: ADxREG7 01111: ADxREG15 10111: ADxREG23 11000 to 11111: Inhibited setting

Note: This register must be set while [ADxCMPEN]<CMP2EN> =0.

5.2.12. [ADxCMP3] (Monitor Function Setting Register3)

Bit	Bit Symbol	After Reset	Type	Function
31:12	-	0	R	Read as "0"
11:8	CMPCNT3[3:0]	0000	R/W	Comparison count 0000: 1 1000: 9 0001: 2 1001: 10 0010: 3 1010: 11 0011: 4 1011: 12 0100: 5 1100: 13 0101: 6 1101: 14 0110: 7 1110: 15 0111: 8 1111: 16
7	-	0	R	Read as "0"
6	CMPCND3	0	R/W	Determination condition 0: Continuous count 1: Accumulated count
5	ADBIG3	0	R/W	Magnitude determination setting 0: Conversion result specified by <REGS3[4:0]> > [ADxCMP3] 1: Conversion result specified by <REGS3[4:0]> < [ADxCMP3]
4:0	REGS3[4:0]	00000	R/W	Compared conversion result storage register 00000: ADxREG0 01000: ADxREG8 10000: ADxREG16 00001: ADxREG1 01001: ADxREG9 10001: ADxREG17 00010: ADxREG2 01010: ADxREG10 10010: ADxREG18 00011: ADxREG3 01011: ADxREG11 10011: ADxREG19 00100: ADxREG4 01100: ADxREG12 10100: ADxREG20 00101: ADxREG5 01101: ADxREG13 10101: ADxREG21 00110: ADxREG6 01110: ADxREG14 10110: ADxREG22 00111: ADxREG7 01111: ADxREG15 10111: ADxREG23 11000 to 11111: Inhibited setting

Note: This register must be set while [ADxCMPEN]<CMP3EN> =0.

5.2.13. [ADxCMP0] (Conversion Result Comparison Register0)

Bit	Bit Symbol	After Reset	Type	Function
31:16	-	0	R	Read as "0"
15:4	ADCMP0[11:0]	0x000	R/W	AD conversion result comparison value storage The value compared with the AD conversion result is set.
3:0	-	0	R	Read as "0"

Note: This register must be set while [ADxCMPEN]<CMP0EN> =0.

5.2.14. [ADxCMP1] (Conversion Result Comparison Register1)

Bit	Bit Symbol	After Reset	Type	Function
31:16	-	0	R	Read as "0"
15:4	ADCMP1[11:0]	0x000	R/W	AD conversion result comparison value storage The value compared with the AD conversion result is set.
3:0	-	0	R	Read as "0"

Note: This register must be set while [ADxCMPEN]<CMP1EN> =0.

5.2.15. [ADxCMP2] (Conversion Result Comparison Register2)

Bit	Bit Symbol	After Reset	Type	Function
31:16	-	0	R	Read as "0"
15:4	ADCMP2[11:0]	0x000	R/W	AD conversion result comparison value storage The value compared with the AD conversion result is set.
3:0	-	0	R	Read as "0"

Note: This register must be set while [ADxCMPEN]<CMP2EN> =0.

5.2.16. [ADxCMP3] (Conversion Result Comparison Register3)

Bit	Bit Symbol	After Reset	Type	Function
31:16	-	0	R	Read as "0"
15:4	ADCMP3[11:0]	0x000	R/W	AD conversion result comparison value storage The value compared with the AD conversion result is set.
3:0	-	0	R	Read as "0"

Note: This register must be set while [ADxCMPEN]<CMP3EN> =0.

5.2.17. [ADxEXAZSEL] (AIN Sampling Time Selection Register)

Bit	Bit Symbol	After Reset	Type	Function
31:0	EXAZSEL[31:0]	0x00000000	R/W	<p>Selection of AIN sampling time setting 0: [ADxCLK]<EXAZ0[3:0]> setting is used 1: [ADxCLK]<EXAZ1[3:0]> setting is used Please select which one of <EXAZ0[3:0]> or <EXAZ1[3:0]> is used for each AIN channel.</p> <p>Each bit corresponds to the AIN channel. EXAZSEL[23]: AIN sampling time setting selection of AINx23 EXAZSEL[22]: AIN sampling time setting selection of AINx22 . . EXAZSEL[0]: AIN sampling time setting selection of AINx00 Others: Reserved</p>

Note: This register must be set while [ADxCR0]<ADEN> =0.

5.2.18. [ADxTSET0] (Start-up Factor Program Register0)

The following is an explanation of [ADxTSET0]. [ADxTSET1] to [ADxTSET23] have the same configuration.

Bit	Bit Symbol	After Reset	Type	Function
31:11	-	0	R	Read as "0"
10:8	TRGS0[2:0]	000	R/W	Conversion Result Storage Register0 setting: Conversion control 000: No conversion 001: Continuous conversion 010: Single conversion 011: General purpose trigger conversion 1xx: Highest priority conversion
7	ENINT0	0	R/W	Conversion Result Storage Register0 setting: Interrupt control 0: Disabled 1: Enabled.
6:5	-	0	R	Read as "0"
4:0	AINST0[4:0]	00000	R/W	Conversion Result Storage Register0 setting: AIN selection (Note2) 00000: AINx00 01000: AINx08 10000: AINx16 00001: AINx01 01001: AINx09 10001: AINx17 00010: AINx02 01010: AINx10 10010: AINx18 00011: AINx03 01011: AINx11 10011: AINx19 00100: AINx04 01100: AINx12 10100: AINx20 00101: AINx05 01101: AINx13 10101: AINx21 00110: AINx06 01110: AINx14 10110: AINx22 00111: AINx07 01111: AINx15 10111: AINx23 11000 to 11111: Inhibited setting

Note1: This register must be set while [ADxCR0]<ADEN> = 0.

Note2: The AIN which the product does not have is inhibited to be set. (Refer to "Product Information" of the reference manual.)

5.2.19. [ADxREG0] (Conversion Result Storage Register0)

The following is an explanation of [ADxREG0]. [ADxREG1] to [ADxREG23] have the same configuration.

Bit	Bit Symbol	After Reset	Type	Function
31:30	-	0	R	Read as "0"
29	ADOVRF_M0	0	R	Mirror bit of overrun flag <ADOVRF0>
28	ADRF_M0	0	R	Mirror bit of AD conversion result storage flag <ADRF0>
27:16	ADR_M0[11:0]	0x000	R	Mirror field of AD conversion result <ADR0[11:0]>. The AD conversion result is read from the lower 12 bits in the upper half word of [ADxREG0] register.
15:4	ADR0[11:0]	0x000	R	AD conversion result is stored. The AD conversion result is read from the upper 12 bits in the lower half word of [ADxREG0] register.
3:2	-	0	R	Read as "0"
1	ADOVRF0	0	R	Overrun flag 0: Not occurred. 1: Occurred. This flag is set to "1", when an AD conversion result is overwritten before the [ADxREG0] register is read. This flag is cleared to "0" when it is read.
0	ADRF0	0	R	AD conversion result storage flag 0: No conversion results are stored. 1: A conversion result is stored. This flag is set to "1" when an AD conversion value is stored. This flag is cleared to "0" when it is read.

6. Example of Usage

6.1. Single conversion

The single conversion is started by software and enable more than one conversion.

In the following setting example, the conversion results of the two analog inputs (AINx02, AINx03) are saved in two result storage registers (*[ADxREG4]*, *[ADxREG5]*), and a single conversion interrupt INTADxSGL is generated at the end of the second conversion.

- Initial setting
 - *[ADxCLK]* = 0x00000000
AD prescaler output: <VADCLK[2:0]> = 000
(AD prescaler output: 30[MHz] (ADCLK / 2 @ADCLK:60[MHz]))
AIN sampling time: <EXAZ0[3:0]> = 0000 and <EXAZ1[3:0]> = 0001
(Sampling time: EXAZ0: 0.27[μs], EXAZ1: 0.53[μs])
 - *[ADxEXAZSEL]* = 0x00000008
AIN sampling time selection (AINx02: EXAZ0, AINx03: EXAZ1)
 - *[ADxMOD0]* = 0x00000001
DAC ON: <DACON> = 1
Normal operation: <RCUT> = 0
 - *[ADxMOD1]* = 0x00004000
(Conversion time AINx02: 1.00[μs], AINx03: 1.27[μs])
 - *[ADxMOD2]* = 0x00000000

Note: The settings depend on a product. For the setting values, refer to "Product Information" of the reference manual.

- Conversion program setting
 - *[ADxTSET4]* = 0x00000202
Single conversion: <TRGS4[2:0]> = 010
AINx02: <AINST4[4:0]> = 00010
Disable interrupt output: <ENINT4> = 0
 - *[ADxTSET5]* = 0x00000283
Single conversion: <TRGS5[2:0]> = 010
AINx03: <AINST5[4:0]> = 00011
Enable interrupt output: <ENINT5> = 1
- Conversion start setting
 - *[ADxCR1]* = 0x00000000
Disable Single conversion DMA request: <SGLDMEN> = 0
 - *[ADxCR0]* = 0x00000082
Enable ADC: <ADEN> = 1
Disable continuous conversion: <CNT> = 0
Enable single conversion: <SGL> = 1 ; Conversion start

6.2. Highest priority conversion

The conversion with the highest priority conversion can be started with the highest priority trigger.

In the following, save the conversion result of analog input (AINx04) in the conversion result storage register (*[ADxREG6]*) with the highest priority trigger (ADxHPTRGIN). This is an example of setting to generate the highest priority conversion completion interrupt INTADxHP at the end of conversion.

- Initial setting
 - *[ADxCLK]* = 0x00000000
AD prescaler output: <VADCLK[2:0]> = 000
(AD prescaler output: 30[MHz] (ADCLK / 2 @ADCLK:60[MHz]))
 - AIN sampling time: <EXAZ1[3:0]> = 0000
(sampling time: EXAZ1: 0.27[μs])
 - *[ADxEXAZSEL]* = 0x00000010
AIN sampling time selection (AINx04: EXAZ1)
 - *[ADxMOD0]* = 0x00000001
DAC ON: <DACON> = 1
Normal operation: <RCUT> = 0
 - *[ADxMOD1]* = 0x00004000
(Conversion time AINx04: 1.00[μs])
 - *[ADxMOD2]* = 0x00000000

Note: The settings depend on a product. For the setting values, refer to "Product Information" of the reference manual.

- Conversion program setting
 - *[ADxTSET6]* = 0x00000484
Highest priority conversion: <TRGS6[2:0]> = 1xx
AINx04: <AINST6[4:0]> = 00100
Enable interrupt output: <ENINT6> = 1
- Conversion start setting
 - *[ADxCR1]* = 0x00000002
Disable highest priority conversion DMA request: <HPDMEN> = 0
Enable highest priority trigger conversion control: <HPTRGEN> = 1
 - *[ADxCR0]* = 0x00000080
Enable ADC: <ADEN> = 1
Disable highest priority trigger conversion operation: <HPSGL> = 0

7. Precaution

- The AD conversion result may have some variation due to the fluctuation of the power supply and surrounding noises. The data of the output pins should not be changed during AD conversion to prevent from degrading the AD conversion accuracy. The AD conversion accuracy may degrade if the signal on the shared pin with the AD input/output changes or other output pin changes its output during the AD conversion. In the above case, the AD conversion result should be acquired with the mean value of multiple conversion results and other countermeasures.
- Measures should be taken to prevent digital noise from mixing into the analog power supply pins (AVDD3, AVSS) and the reference voltage pins (VREFHx, VREFLx) of the ADC.
 - Insert a bypass capacitor between AVDD3 and AVSS pins, the VREFHx and VREFLx pins. Place the capacitor as close to the terminal as possible.

8. Revision History

Table 8.1 Revision History

Revision	Date	Description
1.0	2020-11-02	First release
1.1	2021-03-22	- Corrected Figure 4.1.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**