

TOSHIBA

**32-Bit TX System RISC
TX19 Family**

TMP19A63CDXBG

Rev1.1

2008-3-28

Contents

TMP19A63CDXBG

- | | |
|---|------------------------------|
| 1 | Overview and Features |
| 2 | Pin Layout and Pin Functions |
| 3 | Memory Map |
| 4 | Electrical Characteristics |
| 5 | Package |

Not Recommended
for New Design

TMP19A63CDXBG

1. Overview and features

TMP19A63 is equipped with the TX19A processor core that forms a high-performance 32-bit RISC processor series. The core was developed based on the MIPS32ISA that contains a 32-bit instruction set and the MIPS16eISA that contains an instruction set of high code efficiency. TOSHIBA uniquely integrated these two and the MIPS16e-TX™ASE (Application Specific Extension), which includes an extended instruction set of high code efficiency.

TMP19A63 is a 32-bit RISC microprocessor with a TX19A processor core and various peripheral functions integrated into one package. It can operate at low voltage with low power consumption.

Features of TMP19A63 are as follows:

(1) TX19A processor core

- 1) Improved code efficiency and operating performance have been realized through the use of two ISA (Instruction Set Architecture) modes - 16- and 32-bit ISA modes.
 - The 16-bit ISA mode instructions are compatible with the MIPS16™ASE instructions of superior code efficiency at the object level.
 - The 32-bit ISA mode instructions are compatible with the TX39 instructions of superior operating performance at the object level.

RESTRICTIONS ON PRODUCT USE

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.

2) Both high performance and low power dissipation have been achieved.

•High performance

- Almost all instructions can be executed with one clock.
- High performance is possible via a three-operand operation instruction.
- 5-stage pipeline
- Built-in high-speed memory
- DSP function: A 32-bit multiplication and accumulation operation can be executed with one clock.

•Low power consumption

- Optimized design using a low power consumption library
- Standby function that stops the operation of the processor core

3) High-speed interrupt response suitable for real-time control

- Independency of the entry address
- Automatic generation of factor-specific vector addresses
- Automatic update of interrupt mask levels

(2) Internal program memory and data memory

Product name	Built-in ROM	Built-in RAM
TMP19A63CDXBG	512Kbyte	24Kbyte
TMP19A63F10XBG	1Mbyte(Flash)	48Kbyte

- ROM correction function: 8word×12 block

(3) External memory expansion

- Expandable to 16 megabytes (for both programs and data)
- External data bus:
 - Separate bus/multiplexed bus : Coexistence of 8- and 16-bit widths is possible.
 - Chip select/wait controller : 4 channels
 - Added CS recovery function (wait is inserted within RD (WR)↑ - CS↑)
 - (For 1 clock)
 - External wait X+2N-capable (X=2 to 7)
 - Changed ALE width

(4) DMA controller : 8 channels

- Activated by an interrupt or software
- Data to be transferred to internal memory, internal I/O, external memory, and external I/O

(5) 16-bit timer : 36 channels

- 16-bit interval timer mode
- 16-bit event counter mode
- 16-bit PPG output
- Input capture function
 - 2-phase pulse input counter function (2 channels assigned to perform this function):

(6) 32-bit timer

- 32-bit input capture register: 4 channels
- 32-bit compare register: 4 channels
- 32-bit time base timer: 2 channels

(7) General-purpose serial interface: 11 channels

- Selectable between the UART mode and the synchronization mode

(8) Serial bus interface: 2 channels

- Selectable between I²C bus mode/ the clock synchronization mode

(9) 10-bit A/D converter (with S/H): 32 channels

- An optional trigger by the internal timer

- Fixed channel/scan mode
 - Single/repeat mode
 - Top-priority conversion mode
 - Timer monitor function
1.7usec@27MHz (at 54MHz) 1.15usec@40MHz (at 40MHz)
(Consists of 2 units. Capable of simultaneous conversion. No definition for error between units)
 - (11) Watchdog timer: 1 channel
 - (12) Chip select/ wait controller: 6 channels
 - (13) Interrupt function
 - CPU: 2 factors ...software interrupt instruction
 - Internal 83 factors...The order of precedence can be set over 7 levels (except the watchdog timer interrupt)
39- independent-interrupt factors are included.
 - External: 20 factors...The order of precedence can be set over 7 levels.
(Except for NMI interrupt)
8 factors, which are KWUP, are united as an interrupt factor.
 - (14) Input and output ports: 212 pins
 - (15) Standby function
 - Two stand-by modes (IDLE, STOP)
 - (16) Clock generator
 - Built-in PLL (multiplication by 4)
 - Clock gear function: The high-speed clock can be divided into 1/1, 1/2 , 1/4, 1/8.
 - (17) Endian: Bi-endian (big-endian/little-endian)
- Big endian
- | | | | | | | | | | | |
|---|---------------|----|----|----|----|----|---|---|---|--------------|
| | Upper address | 31 | 24 | 23 | 16 | 15 | 8 | 7 | 0 | Word address |
| ↑ | | 8 | 9 | 10 | 11 | | | | | 8 |
| | | 4 | 5 | 6 | 7 | | | | | 4 |
| | | 0 | 1 | 2 | 3 | | | | | 0 |
| | Lower address | | | | | | | | | |
- The most significant byte is 0 (bit 31-24).
 - The address of the most significant byte specifies the word address.
- Little endian
- | | | | | | | | | | | |
|---|---------------|----|----|----|----|----|---|---|---|--------------|
| | Upper address | 31 | 24 | 23 | 16 | 15 | 8 | 7 | 0 | Word address |
| ↑ | | 11 | 10 | 9 | 8 | | | | | 8 |
| | | 7 | 6 | 5 | 4 | | | | | 4 |
| | | 3 | 2 | 1 | 0 | | | | | 0 |
| | Lower address | | | | | | | | | |
- The least significant byte is 0 (bit 7-0).
 - The address of the least significant byte specifies the word address.
- (18) Operating frequency
 - 54MHz (DVCC15 = 1.35V-1.65V)
 - (19) Operating voltage range
 - Core: 1.35 - 1.65V
 - I/O: 1.65 - 3.3 V
 - ADC: 2.7 - 3.3 V
 - (20) Temperature range
 - -20°C-85°C
 - (21) Package
 - P-TFPGA289 (11mm×11mm, 0.5mm pitch)

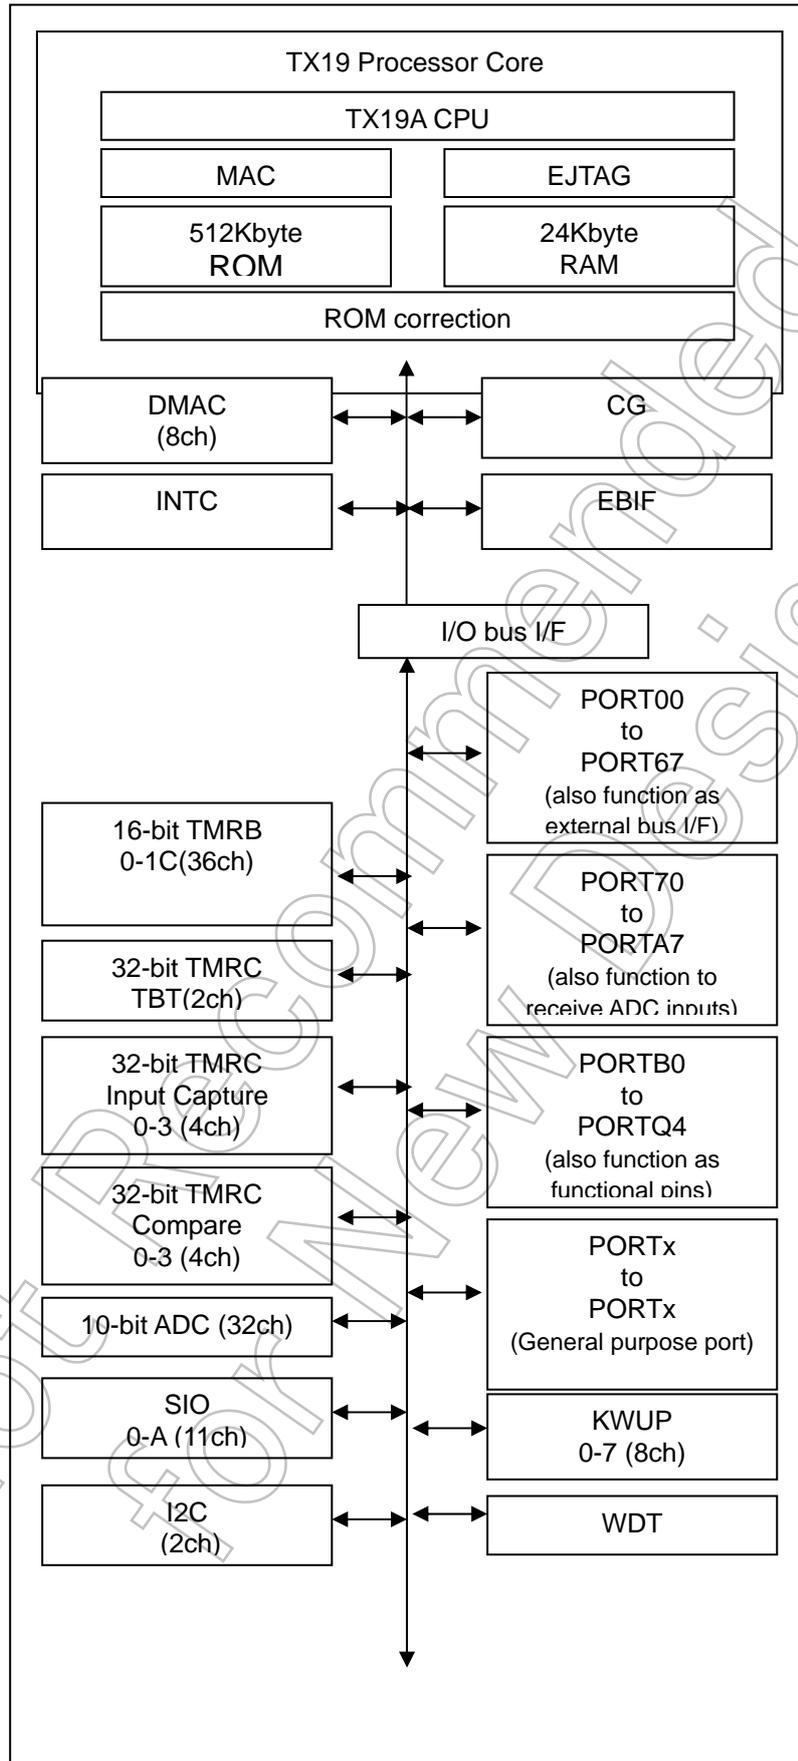


Fig. 1.1 TMP19A63CDXBG Block Diagram

2. Pin Layout and Pin Functions

This section shows the pin layout of TMP19A63 and describes the names and functions of input and output pins.

2.1 Pin Layout (Top view)

Fig. 2.1.1 shows the pin layout of TMP19A63.

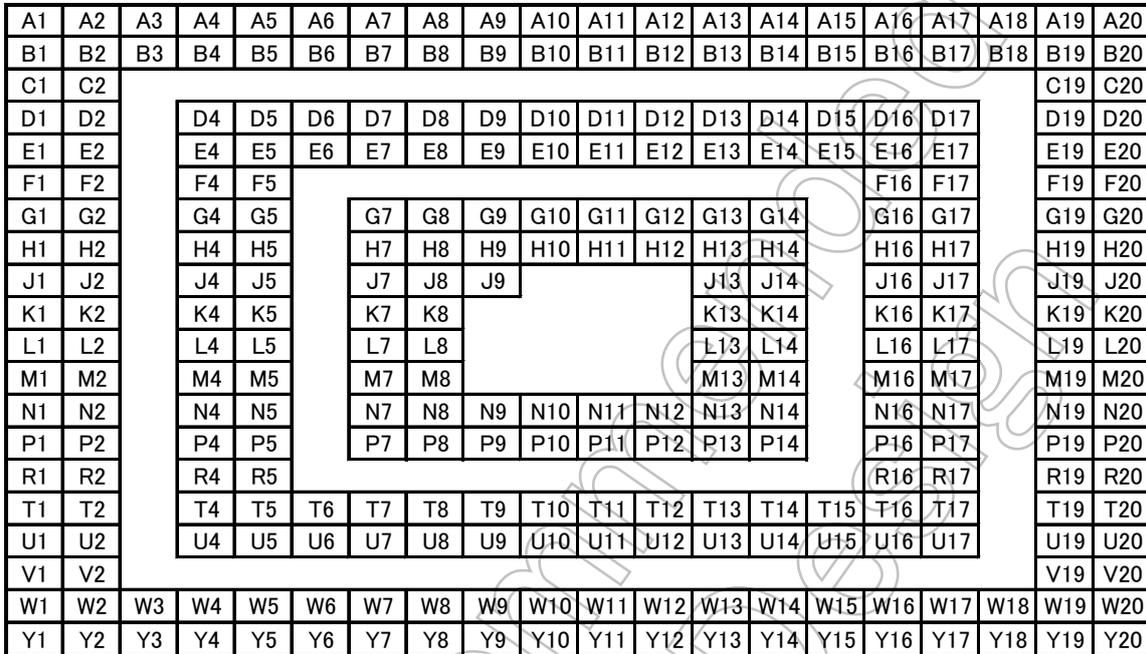


Fig. 2.1.1 Pin Layout Diagram (P-FBGA289)

Pin numbers and pin names

Table 2.2 show the pin numbers and pin names of TMP19A63.

Table 2.2 Pin Numbers and Pin Names (1/3)

PIN No.	PIN Name	PIN No.	PIN Name	PIN No.	PIN Name	PIN No.	PIN Name
A1	N.C(GND)	B1	N.C(GND)	C1	PL0/TC4IN	D1	PL2
A2	N.C(GND)	B2	N.C(GND)	C2	PL1/TC5IN	D2	PL3/TCOUTB0
A3	RESET	B3	PCST0				
A4	PCST1	B4	PCST2			D4	DVSSA
A5	PCST3	B5	PCST4			D5	PQ0/DREQ2
A6	DCLK	B6	TOVR			D6	TCK
A7	TDO	B7	TDI			D7	DINT
A8	PP6/TPC6/TPD6	B8	PP7/TPC7/TPD7			D8	PO6/TPD6
A9	PP4/TPC4/TPD4	B9	PP5/TPC5/TPD5			D9	PO4/TPD4
A10	PP2/TPC2/TPD2	B10	PP3/TPC3/TPD3			D10	PO2/TPD2
A11	PP0/TPC0/TPD0	B11	PP1/TPC1/TPD1			D11	PO0/TPD0
A12	PJ4/TC1IN	B12	PJ5/SO1/SDA1			D12	PJ6/SI1/SCL1
A13	PJ2/SCLK8/CTS8	B13	RJ3/TC0IN			D13	PM6/TCOUTA0
A14	PJ0/TXD8	B14	PJ1/RXD8			D14	PM4/INT4
A15	PF6/SCLK1/CTS1	B15	PF7			D15	PM2/INT2
A16	PF4/TXD1	B16	PF5/RXD1			D16	PM0/INT0
A17	PF2/SCLK0/CTS0	B17	PF3			D17	PG5/RXD3
A18	PF0/TXD0	B18	PF1/RXD0				
A19	N.C(GND)	B19	N.C(GND)	C19	PG7/TBTIN2	D19	PG4/TXD3
A20	N.C(GND)	B20	N.C(GND)	C20	PG6/SCLK3/CTS3	D20	PG3/TBTIN1

Table 2.2 Pin Numbers and Pin Names (2/3)

PIN No.	PIN Name	PIN No.	PIN Name	PIN No.	PIN Name	PIN No.	PIN Name
E1	PL4/TXD9	F1	PL6/SCLK9/CTS9	G1	P00/D0/AD0	H1	P02/D2/AD2
E2	PL5/RXD9	F2	PL7/TCOUTB1	G2	P01/D1/AD1	H2	P03/D3/AD3
E4	PQ1/DACK2	F4	PQ2/DREQ3	G4	PK0/KEY0	H4	PK2/KEY2
E5	DVSSB	F5	PQ3/DACK3	G5	PK1/KEY1	H5	PK3/KEY3
E6	TRST						
E7	TMS			G7	DVSSC	H7	PK4/KEY4
E8	PO7/TPD7			G8	EJE	H8	DVSSD
E9	PO5/TPD5			G9	DVCC33	H9	N.C (OPEN)
E10	PO3/TPD3			G10	DVCC34	H10	N.C (OPEN)
E11	PO1/TPD1			G11	DVCC34	H11	DVCC15
E12	PJ7/SCK1			G12	DVCC34	H12	DVCC15
E13	PM7/TCOUTA1			G13	DVCC32	H13	AVSS1
E14	PM5/INT5			G14	AVSS0	H14	P85/ANA13
E15	PM3/INT3						
E16	PM1/INT1	F16	P77/ANA7	G16	P87/ANA15	H16	P84/ANA12
E17	PG2/SCLK2/CTS2	F17	P76/ANA6	G17	P86/ANA14	H17	P83/ANA11
E19	PG1/RXD1	F19	P75/ANA5	G19	P73/ANA3	H19	P71/ANA1
E20	PG0/TXD2	F20	P74/ANA4	G20	P72/ANA2	H20	P70/ANA0
J1	P04/D4/AD4	K1	P06/D6/AD6	L1	P10/D8/AD8/A8	M1	P12/D10/AD10/A10
J2	P05/D5/AD5	K2	P07/D7/AD7	L2	P11/D9/AD9/A9	M2	P13/D11/AD11/A11
J4	P50/A0	K4	P52/A2	L4	P54/A4	M4	P56/A6
J5	P51/A1	K5	P53/A3	L5	P55/A5	M5	P57/A7
J7	PK5/KEY5	K7	PK6/KEY6	L7	PK7/KEY7	M7	BW0
J8	DVCC30	K8	DVCC30	L8	DVCC30	M8	DVCC15
J9	DVSSH						
J13	AVCC30	K13	AVREFH0	L13	AVREFH1	M13	AVCC31
J14	P82/ANA10	K14	PA7/ANB15	L14	PA4/ANB12	M14	DVCC15
J16	P81/ANA9	K16	PA6/ANB14	L16	PA3/ANB11	M16	PA1/ANB9
J17	P80/ANA8	K17	PA5/ANB13	L17	PA2/ANB10	M17	PA0/ANB8
J19	P97/ANB7	K19	P95/ANB5	L19	P93/ANB3	M19	P91/ANB1
J20	P96/ANB6	K20	P94/ANB4	L20	P92/ANB2	M20	P90/ANB0
N1	P14/D12/AD12/A12	P1	P16/D14/AD14/A14	R1	P40/*CS0	T1	P42/*CS2
N2	P15/D13/AD13/A13	P2	P17/D15/AD15/A15	R2	P41/*CS1	T2	P43/*CS3
N4	P30/*RD	P4	P32/*HWR	R4	P34/*BUSRQ	T4	P36/R/*W
N5	P31/*WR	P5	P33/*WAIT/*RDY	R5	P35/*BUSAK	T5	P61/A9
						T6	P63/A11
N7	BW1	P7	DVSSE			T7	P65/A13
N8	DVSSF	P8	DVSSG			T8	PN1/INT7
N9	BUSMD	P9	ENDIAN			T9	PN3/ADTRG-A
N10	DVCC15	P10	*NMI			T10	PN5/RXDA
N11	DVCC15	P11	DVCC31			T11	PN7/ADTRG-B
N12	PLLSEL	P12	DVCC31			T12	PH1/RXD4
N13	DVSSI	P13	CVSS			T13	PH3/INT9
N14	CVCC15	P14	DVSSL			T14	PH5/RXD5
						T15	PH7/INTA
N16	PC7/TB0FIN1	P16	PC5/TB0EIN1	R16	PC3/TB0DIN1	T16	DVSSK
N17	PC6/TB0FIN0	P17	PC4/TB0EIN0	R17	PC2/TB0DIN0	T17	PC1/TB0CIN1
N19	PB7/TB0BIN1	P19	PB5/TB0AIN1	R19	PB3/TB9IN1	T19	PB1/TB8IN1
N20	PB6/TB0BIN0	P20	PB4/TB0AIN0	R20	PB2/TB9IN0	T20	PB0/TB8IN0

Table 2.2 Pin Numbers and Pin Names (3/3)

PIN No.	PIN Name	PIN No.	PIN Name	PIN No.	PIN Name	PIN No.	PIN Name
U1	P44/*CS4	V1	P46/SCOUT	W1	N.C(GND)	Y1	N.C(GND)
U2	P45/*CS5	V2	P47	W2	N.C(GND)	Y2	N.C(GND)
				W3	P21/A17/A1/A17	Y3	P20/A16/A0/A16
U4	P37/ALE			W4	P23/A19/A3/A19	Y4	P22/A18/A2/A18
U5	P60/A8			W5	P25/A21/A5/A21	Y5	P24/A20/A4/A20
U6	P62/A10			W6	P27/A23/A7/A23	Y6	P26/A22/A6/A22
U7	P64/A12			W7	P67/A15	Y7	P66/A14
U8	PN0/INT6			W8	PI1/RXD6	Y8	PI0/TXD6
U9	PN2/INT8			W9	PI3/INTB	Y9	PI2/SCLK6/CLS6
U10	PN4/TXDA			W10	PI5/RXD7	Y10	PI4/TXD7
U11	PN6/SCLKA/CTSA			W11	PI7	Y11	PI6/SCLK7/CTS7
U12	PH0/TXD4			W12	PE1/TB17OUT	Y12	PE0/TB16OUT
U13	PH2/SCLK4/CTS4			W13	PE3/TB19OUT	Y13	PE2/TB18OUT
U14	PH4/TXD5			W14	PE5/SO0/SCA0	Y14	PE4/TB1AOUT
U15	PH6/SCLK5/CTS5			W15	PE7/SCK0	Y15	PE6/SI0/SCL0
U16	PD2/TB11IN0			W16	PD1/TB10IN1	Y16	PD0/TB10IN0
U17	DVSSJ			W17	PD4/TB12IN0	Y17	PD3/TB11IN1
				W18	PD6/TB14OUT	Y18	PD5/TB12IN1
U19	PC0/TB0CIN0	V19	PD7/TB15OUT	W19	N.C(GND)	Y19	N.C(GND)
U20	X2	V20	X1	W20	N.C(GND)	Y20	N.C(GND)

Not Recommended for New Designs

2.3 Pin Names and Functions

Tables 2.3 show the names and functions of input and output pins.

Table 2.3 Pin Names and Functions (1/8)

Pin name	No. of pins	Input or output	Function
P00~P07 D0~D7 AD0~D7	8	Input/output Input/output Input/output	Port 0: Input/output port that allows input/output to be set in units of bits Data (lower): Data bus 0~7 (separate bus mode) Address data (lower): Address data bus 0~7 (multiplexed bus mode)
P10~P17 D8~D15 AD8~AD15 A8~A15	8	Input/output Input/output Input/output Output	Port 1: Input/output port that allows input/output to be set in units of bits Data (upper): Data bus 8~15: (separate bus mode) Address data (upper): Address data bus 8~15 (multiplexed bus mode) Address: Address bus 8~15 (multiplexed bus mode)
P20~P27 A16~A23 A0~A7 A16~A23	8	Input/output Output Output Output	Port 2: Input/output port that allows input/output to be set in units of bits Address: Address bus 16~23 (separate bus mode) Address: Address bus 0~7 (multiplexed bus mode) Address: Address bus 16~23 (multiplexed bus mode)
P30 *RD	1	Input/output Output	Port 30: Input/output port (with pull-up) Read: Strobe signal for reading external memory
P31 *WR	1	Input/output Output	Port 31: Input/output port (with pull-up) Write: Strobe signal for writing data of D0 to D7 pins
P32 *HWR	1	Input/output Output	Port 32: Input/output port (with pull-up) Write upper-pin data: Strobe signal for writing data of D8 to D15 pins
P33 *WAIT *RDY	1	Input/output Input Input	Port 33: Input/output port (with pull-up) Wait: Pin for requesting CPU to put a bus in a wait state Ready: Pin for notifying CPU that a bus is ready
P34 *BUSRQ	1	Input/output Input	Port 34: Input/output port (with pull-up) Bus request: Signal requesting CPU to allow an external master to take the bus control authority
P35 *BUSAK	1	Input/output Output	Port 35: Input/output port (with pull-up) Bus acknowledge: Signal notifying that CPU has released the bus control authority in response to *BUSREQ
P36 R/*W	1	Input/output Output	Port 36: Input/output port (with pull-up) Read/write: "1" shows a read cycle or a dummy cycle. "0" shows a write cycle.
P37 ALE	1	Input/output Output	Port 37: Input/output port Address latch enable (address latch is enabled only if access to external memory is taking place, that is multiplex bus mode)
P40 *CS0	1	Input/output Output	Port 40: Input/output port (with pull-up) Chip select 0: "0" is output if the address is in a designated address area.
P41 *CS1	1	Input/output Output	Port 41: Input/output port (with pull-up) Chip select 1: "0" is output if the address is in a designated address area.
P42 *CS2	1	Input/output Output	Port 42: Input/output port (with pull-up) Chip select 2: "0" is output if the address is in a designated address area.
P43 *CS3	1	Input/output Output	Port 43: Input/output port (with pull-up) Chip select 3: "0" is output if the address is in a designated address area.
P44 *CS4	1	Input/output Output	Port 44: Input/output port (with pull-up) Chip select 4: "0" is output if the address is in a designated address area.
P45 *CS5	1	Input/output Output	Port 45: Input/output port (with pull-up) Chip select 5: "0" is output if the address is in a designated address area.

Table 2.3 Pin Names and Functions (2/8)

Pin name	No. of pins	Input or output	Function
P46 SCOUT	1	Input/output Output	Port 46: Input/output port System clock output: Selectable between high- and low-speed clock outputs, as in the case of CPU
P47	1	Input/output	Port 47: Input/output port
P50~P57 A0~A7	8	Input/output Output	Port 5: Input/output port that allows input/output to be set in units of bits Address: Address bus 0~7 (separate bus mode)
P60~P67 A8~A15	1	Input/output Output	Port 60 ~67 :Input/output port Address: Address bus 4 (separate bus mode)
P70~P77 ANA0~ANA7	8	Input Input	Port 7:Port used exclusively for input Analog input: Input from A/D converter
P80~P87 ANA8~ANA15	8	Input Input	Port 8:Port used exclusively for input Analog input: Input from A/D converter
P90~P97 ANB0~ANB7	8	Input Input	Port 9:Port used exclusively for input Analog input: Input from A/D converter
PA0~PA7 ANB8~ANB15	8	Input Input	Port A: Port used exclusively for input Analog input: Input from A/D converter
PB0 TB8IN0	1	Input/output Input	Port B0:Input/output port 16-bit timer 8 input 0:For inputting the capture trigger of a 16-bit timer 8
PB1 TB8IN1	1	Input/output Input	Port B1:Input/output port 16-bit timer 8 input 1:For inputting the capture trigger of a 16-bit timer 8
PB2 TB9IN0	1	Input/output Input	Port B2:Input/output port 16-bit timer 9 input 0:For inputting the capture trigger of a 16-bit timer 9
PB3 TB9IN1	1	Input/output Input	Port B3:Input/output port 16-bit timer 9 input 1:For inputting the capture trigger of a 16-bit timer 9
PB4 TBAIN0	1	Input/output Input	Port B4:Input/output port 16-bit timer A input 0:For inputting the capture trigger of a 16-bit timer A
PB5 TBAIN1	1	Input/output Input	Port B5:Input/output port 16-bit timer A input 1:For inputting the capture trigger of a 16-bit timer A
PB6 TBBIN0	1	Input/output Input	Port B6:Input/output port 16-bit timer B input 0:For inputting the capture trigger of a 16-bit timer B
PB7 TBBIN1	1	Input/output Input	Port B7:Input/output port 16-bit timer B input 1:For inputting the capture trigger of a 16-bit timer B
PC0 TBCIN0	1	Input/output Input	Port C0:Input/output port 16-bit timer C input 0:For inputting the capture trigger of a 16-bit timer C/Two-phase counter input pin
PC1 TBCIN1	1	Input/output Input	Port C1:Input/output port 16-bit timer C input 1:For inputting the capture trigger of a 16-bit timer C/Two-phase counter input pin
PC2 TBDIN0	1	Input/output Input	Port C2:Input/output port 16-bit timer D input 0:For inputting the capture trigger of a 16-bit timer D
PC3 TBDIN1	1	Input/output Input	Port C3:Input/output port 16-bit timer D input 1:For inputting the capture trigger of a 16-bit timer D
PC4 TBEIN0	1	Input/output Input	Port C4:Input/output port 16-bit timer E input 0:For inputting the capture trigger of a 16-bit timer E
PC5 TBEIN1	1	Input/output Input	Port C5:Input/output port 16-bit timer E input 1:For inputting the capture trigger of a 16-bit timer E
PC6 TBFIN0	1	Input/output Input	Port C6:Input/output port 16-bit timer F input 0:For inputting the capture trigger of a 16-bit timer F
PC7 TBFIN1	1	Input/output Input	Port C7:Input/output port 16-bit timer F input 1:For inputting the capture trigger of a 16-bit timer 10
PD0 TB10IN0	1	Input/output Input	Port D0:Input/output port 16-bit timer 10 input 0:For inputting the capture trigger of a 16-bit timer 10

Table 2.3 Pin Names and Functions (3/8)

Pin name	No. of pins	Input or output	Function
PD1 TB10IN1	1	Input/output Input	Port D1:Input/output port 16-bit timer 10 input 1:For inputting the capture trigger of a 16-bit timer 10
PD2 TB11IN0	1	Input/output Input	Port D2:Input/output port 16-bit timer 11 input 0:For inputting the capture trigger of a 16-bit timer 11
PD3 TB11IN1	1	Input/output Input	Port D3:Input/output port 16-bit timer 11 input 1:For inputting the capture trigger of a 16-bit timer 11
PD4 TB12IN0	1	Input/output Input	Port D4:Input/output port 16-bit timer 12 input 0:For inputting the capture trigger of a 16-bit timer 12 /Two-phase counter input pin
PD5 TB12IN1	1	Input/output Input	Port D5:Input/output port 16-bit timer 12 input 1:For inputting the capture trigger of a 16-bit timer 12 /Two-phase counter input pin
PD6 TB14OUT	1	Input/output Output	Port D6:Input/output port 16-bit timer 14 output :16bit timer 14 variable PPG output
PD7 TB15OUT	1	Input/output Output	Port D7:Input/output port 16-bit timer 15 output :16bit timer 15 variable PPG output
PE0 TB16OUT	1	Input/output Output	Port E0:Input/output port 16-bit timer 16 output :16bit timer 16 variable PPG output
PE1 TB17OUT	1	Input/output Output	Port E1:Input/output port 16-bit timer 17 output :16bit timer 17 variable PPG output
PE2 TB18OUT	1	Input/output Output	Port E2:Input/output port 16-bit timer 18 output :16bit timer 18 variable PPG output
PE3 TB19OUT	1	Input/output Output	Port E3:Input/output port 16-bit timer 19 output :16bit timer 19 variable PPG output
PE4 TB1AOUT	1	Input/output Output	Port E4:Input/output port 16-bit timer 1A output :16bit timer 1A variable PPG output
PE5 SO0 SDA0	1	Input/output Output Input/output	Port E5:Input/output port Pin for sending data if the serial bus interface operates in the SIO mode Pin for sending and receiving data if the serial bus interface operates in the I2C mode(Input with Schmitt trigger) Open drain output pin)
PE6 SIO SCL0	1	Input/output Input Input/output	Port E6:Input/output port Pin for receiving data if the serial bus interface operates in the SIO mode Pin for inputting and outputting a clock if the serial bus interface operates in the I2C mode(Input with Schmitt trigger) Open drain output pin)
PE7 SCK0	1	Input/output Input/output	Port E7:Input/output port Pin for inputting and outputting a clock if the serial bus interface operates in the I2C mode
PF0 TXD0	1	Input/output Input	Port F0:Input/output port Sending serial data 0: Open drain output pin depending on the program used
PF1 RXD0	1	Input/output Input	Port F1:Input/output port Receiving serial data 0
PF2 *SCLK0 CTS0	1	Input/output Input Input	Port F2:Input/output port Serial clock input/output 0 : Open drain output pin depending on the program used Handshake input pin
PF3	1	Input/output	Port F3:Input/output port
PF4 TXD1	1	Input/output Input	Port F0:Input/output port Sending serial data 1: Open drain output pin depending on the program used
PF5 RXD1	1	Input/output Input	Port F2:Input/output port Receiving serial data 1
PF6 *SCLK1 CTS1	1	Input/output Input Input	Port F3:Input/output port Serial clock input/output 1 : Open drain output pin depending on the program used Handshake input pin
PF7	1	Input/output	Port F7:Input/output port

Table 2.3 Pin Names and Functions (4/8)

Pin name	No. of pins	Input or output	Function
PG0 TXD2	1	Input/output Output	Port G0:Input/output port Sending serial data 2: Open drain output pin depending on the program used
PG1 RXD2	1	Input/output Input	Port G1 Input/output port Receiving serial data 2
PG2 *SCLK2 CTS2	1	Input/output Input/output Input	Port G2:Input/output port serial clock input/output 2 : Open drain output pin depending on the program used Handshake input pin
PG3 TBTIN1	1	Input/output Input	Port G3:Input/output port 32-bit time base timer input 1:For inputting a 32-bit time base timer
PG4 TXD3	1	Input/output Input	Port G4:Input/output port Sending serial data 3: Open drain output pin depending on the program used
PG5 RXD3	1	Input/output Input	Port G5 Input/output port Receiving serial data 3
PG6 *SCLK3 CTS3	1	Input/output Input/output Input	Port G6:Input/output port Serial clock input/output 3: Open drain output pin depending on the program, used Handshake input pin
PG7 TBTIN2	1	Input/output Input	Port G7:Input/output port 32-bit time base timer input 2:For inputting a 32-bit time base timer
PH0 TXD4	1	Input/output Output	Port H0:Input/output port Sending serial data 4: Open drain output pin depending on the program used
PH1 RXD4	1	Input/output Input	Port H1 Input/output port Receiving serial data 4
PH2 *SCLK4 CTS4	1	Input/output Input/output Input	Port H2:Input/output port Serial clock input/output 4 : Open drain output pin depending on the program used Handshake input pin
PH3 INT9	1	Input/output Input	Port H3 Input/output port Interrupt request pin 9: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PH4 TXD4	1	Input/output Output	Port H4:Input/output port Sending serial data 5: Open drain output pin depending on the program used
PH5 RXD5	1	Input/output Input	Port H5 Input/output port Receiving serial data 5
PH6 *SCLK5 CTS5	1	Input/output Input/output Input	Port H6:Input/output port Serial clock input/output 5 : Open drain output pin depending on the program used Handshake input pin
PH7 INTA	1	Input/output Input	Port H7 Input/output port Interrupt request pin A: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PI0 TXD6	1	Input/output Output	Port I0:Input/output port Sending serial data 6: Open drain output pin depending on the program used
PI1 RXD6	1	Input/output Input	Port I1 Input/output port Receiving serial data 6
PI2 *SCLK6 CTS6	1	Input/output Input/output Input	Port I2:Input/output port Serial clock input/output 6 : Open drain output pin depending on the program used Handshake input pin
PI3 INTB	1	Input/output Input	Port I3 Input/output port Interrupt request pin B: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PI4 TXD7	1	Input/output Output	Port I4:Input/output port Sending serial data 7: Open drain output pin depending on the program used
PI5 RXD7	1	Input/output Input	Port I5 Input/output port Receiving serial data 7
PI6 *SCLK7 CTS7	1	Input/output Input/output Input	Port I6:Input/output port Serial clock input/output 7 : Open drain output pin depending on the program used Handshake input pin

Table 2.3 Pin Names and Functions (5/8)

Pin name	No. of pins	Input or output	Function
PI7	1	Input/output	Port I7:Input/output port
PJ0 TXD8	1	Input/output Output	Port J0:Input/output port Sending serial data 8: Open drain output pin depending on the program used
PJ1 RXD8	1	Input/output Input	Port J1 Input/output port Receiving serial data 8
PJ2 *SCLK8 CTS8	1	Input/output Input/output Input	Port J2:Input/output port serial clock input/output 8 : Open drain output pin depending on the program used Handshake input pin
PJ3 TC0IN	1	Input/output Input	Port J3 Input/output port For inputting the capture trigger for 32-bit timer
PJ4 TC1IN	1	Input/output Input	Port J4 Input/output port For inputting the capture trigger for 32-bit timer
PJ5 SO1 SDA1	1	Input/output Output Input/output	Port J5:Input/output port Pin for sending data if the serial bus interface operates in the SIO mode Pin for sending and receiving data if the serial bus interface operates in the I2C mode(Input with Schmitt trigger) Open drain output pin
PJ6 SI1 SCL1	1	Input/output Input Input/output	Port J6:Input/output port Pin for receiving data if the serial bus interface operates in the SIO mode Pin for inputting and outputting a clock if the serial bus interface operates in the I2C mode(Input with Schmitt trigger) Open drain output pin
PJ7 SCK1	1	Input/output Input/output	Port J7:Input/output port Pin for inputting and outputting a clock if the serial bus interface operates in the SIO mode
PK0 KEY0	1	Input/output Input	Port K0:Input/output port Key On Wake UP input 0 :(Input with Schmitt trigger with pull-up and Noise filter)
PK1 KYE1	1	Input/output Input	Port K1:Input/output port Key On Wake UP input 1:(Input with Schmitt trigger with pull-up and Noise filter)
PK2 KEY2	1	Input/output Input	Port K2:Input/output port Key On Wake UP input 2:(Input with Schmitt trigger with pull-up and Noise filter)
PK3 KEY3	1	Input/output Input	Port K3:Input/output port Key On Wake UP input 3:(Input with Schmitt trigger with pull-up and Noise filter)
PK4 KEY4	1	Input/output Input	Port K4:Input/output port Key On Wake UP input 4:(Input with Schmitt trigger with pull-up and Noise filter)
PK5 KEY5	1	Input/output Input	Port K5:Input/output port Key On Wake UP input 5 :(Input with Schmitt trigger with pull-up and Noise filter)
PK6 KEY6	1	Input/output Input	Port K6:Input/output port Key On Wake UP input 6 :(Input with Schmitt trigger with pull-up and Noise filter)
PK7 KEY7	1	Input/output Input	Port K7:Input/output port Key On Wake UP input 7 :(Input with Schmitt trigger with pull-up and Noise filter)
PL0 TC4IN	1	Input/output Input	Port L0:Input/output port For inputting the capture trigger for 32-bit timer
PL1 TC5IN	1	Input/output Input	Port L1:Input/output port For inputting the capture trigger for 32-bit timer
PL2	1	Input/output	Port L2:Input/output port
PL3 TCOUTB0	1	Input/output Output	Port L3:Input/output port Outputting 32-bit timer if the result of a comparison is a match
PL4 TXD9	1	Input/output Output	Port L4:Input/output port Sending serial data 9: Open drain output pin depending on the program used
PL5 RXD9	1	Input/output Input	Port L5 Input/output port Receiving serial data 9
PL6 *SCLK9 CTS9	1	Input/output Input/output Input	Port L6:Input/output port serial clock input/output 9 : Open drain output pin depending on the program used Handshake input pin
PL7 TCOUTB1	1	Input/output Output	Port L7:Input/output port Outputting 32-bit timer if the result of a comparison is a match

Table 2.3 Pin Names and Functions (6/8)

Pin name	No. of pins	Input or output	Function
PM0 INT0	1	Input/output Input	Port M0:Input/output port Interrupt request pin 0: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PM1 INT1	1	Input/output Input	Port M0:Input/output port Interrupt request pin 0: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PM2 INT2	1	Input/output Input	Port M0:Input/output port Interrupt request pin 0: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PM3 INT3	1	Input/output Input	Port M0:Input/output port Interrupt request pin 0: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PM4 INT4	1	Input/output Input	Port M0:Input/output port Interrupt request pin 0: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PM5 INT5	1	Input/output Input	Port M0:Input/output port Interrupt request pin 0: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PM6 TCOUTA0	1	Input/output Output	Port M6:Input/output port Outputting 32-bit timer if the result of a comparison is a match
PM7 TCOUTA1	1	Input/output Output	Port M7:Input/output port Outputting 32-bit timer if the result of a comparison is a match
PN0 INT6	1	Input/output Input	Port N0:Input/output port Interrupt request pin 6: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PN1 INT7	1	Input/output Input	Port N1:Input/output port Interrupt request pin 7: Selectable between "H" level, "L" level, rising edge and falling edge (Input with Schmitt trigger with Noise filter)
PN2 INT8	1	Input/output Input	Port N2:Input/output port Interrupt request pin 8: Selectable between "H" level, "L" level, rising edge, falling edge and both edges (Input with Schmitt trigger with Noise filter)
PN3 ADTRG-A	1	Input/output Input	Port N3:Input/output port Pin for starting A/D trigger or A/D converter from an external source
PN4 TXDA	1	Input/output Output	Port N4:Input/output port Sending serial data A: Open drain output pin depending on the program used
PN5 RXDA	1	Input/output Input	Port N5:Input/output port Receiving serial data A
PN6 *SCLK CTSA	1	Input/output Input/output Input	Port N6:Input/output port serial clock input/output A : Open drain output pin depending on the program used Handshake input pin
PN7 ADTRG-B	1	Input/output Input	Port N7:Input/output port Pin for starting A/D trigger or A/D converter from an external source
PO0 TPD0	1	Input/output Output	Port D0:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PO1 TPD1	1	Input/output Output	Port D1:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PO2 TPD2	1	Input/output Output	Port D2:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PO3 TPD3	1	Input/output Output	Port D3:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PO4 TPD4	1	Input/output Output	Port D4:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE

Table 2.3 Pin Names and Functions (7/8)

Pin name	No. of pins	Input or output	Function
PO5 TPD5	1	Input/output Output	Port D5:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PO6 TPD6	1	Input/output Output	Port D5:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PO7 TPD7	1	Input/output Output	Port D5:Input/output port Outputting trace data from the data access address: Signal for DSU-ICE
PP0 TPC0 TPD0	1	Input/output Output Output	Port P0:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP1 TPC1 TPD1	1	Input/output Output Output	Port P1:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP2 TPC2 TPD2	1	Input/output Output Output	Port P2:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP03 TPC3 TPD3	1	Input/output Output Output	Port P3:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP4 TPC4 TPD4	1	Input/output Output Output	Port P4:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP5 TPC5 TPD5	1	Input/output Output Output	Port P5:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP6 TPC6 TPD6	1	Input/output Output Output	Port P6:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PP7 TPC7 TPD7	1	Input/output Output Output	Port P7:Input/output port Outputting trace data from the program counter: Signal for DSU-ICE Outputting trace data from the data access address: Signal for DSU-ICE
PQ0 DREQ2	1	Input/output Input	Port Q0:Input/output port DMA request signal 2: For inputting the request to transfer data by DMA from an external I/O device to DMA2
PQ1 DACK2	1	Input/output Output	Port Q0:Input/output port DMA acknowledge signal 2: Signal showing that DREQ2 have acknowledged a DMA transfer request
PQ2 DREQ3	1	Input/output Input	Port Q2:Input/output port DMA request signal 3: For inputting the request to transfer data by DMA from an external I/O device to DMA3
PQ4 DACK3	1	Input/output Output	Port Q3:Input/output port DMA acknowledge signal 3: Signal showing that DREQ3 have acknowledged a DMA transfer request
DCLK	1	Output	Debug clock: Signal for DSU-ICE
*EJE	1	Input	EJTAG enable: Signal for DSU-ICE(fixed to pull up) (Input with Schmitt trigger with Noise filter)
*DINT	1	Input	Debug interrupt: Signal for DSU-ICE(fixed to pull up) (Input with Schmitt trigger with Noise filter)
PCST0	1	Output	PC trace status: Signal for DSU-ICE
PCST1	1	Output	PC trace status: Signal for DSU-ICE
PCST2	1	Output	PC trace status: Signal for DSU-ICE
PCST3	1	Output	PC trace status: Signal for DSU-ICE
PCST4	1	Output	PC trace status: Signal for DSU-ICE
*DINT	1	入力	Debug interrupt: Signal for DSU-ICE
TOVR	1	Output	Outputting the status of PD data overflow status: Signal for DSU-ICE
TCK	1	Input	Test clock input: Signal for DSU-ICE(fixed to pull up) (Input with Schmitt trigger with Noise filter)
TMS	1	Input	Test mode select input: Signal for DSU-ICE(fixed to pull up) (Input with Schmitt trigger)

Table 2.3 Pin Names and Functions (8/8)

Pin name	No. of pins	Input or output	Function
TDI	1	Input	Test data input: Signal for DSU-ICE(fixed to pull up) (Input with Schmitt trigger)
TDO	1	Output	Test data output: Signal for DSU-ICE
*TRST	1	Input	Test reset input: Signal for DSU-ICE(fixed to pull down) (Input with Schmitt trigger with Noise filter)
*RESET	1	Input	Reset:Initializing LSI (fixed to pull down) (Input with Schmitt trigger with Noise filter)
X1/X2	2	Input/output	Pin for connecting a high-speed oscillator (X1:Input with Schmitt trigger)
*NMI	1	Input	Non-maskable interrupt request pin :(with Schmitt trigger)
BUSMD	1	Input	Pin for setting an external bus mode: This pin functions as a multiplexed bus by sampling the "H (DVCC15) level" at the rise of a reset signal. It also functions as a separate bus by sampling "L" at the rise of a reset signal. When performing a reset operation, pull it up or down according to a bus mode to be used. Input with Schmitt trigger.
ENDIAN	1	Input	Pin for setting endian: This pin is used to set a mode. It performs a big-endian operation by sampling the "H (DVCC15) level" at the rise of a reset signal, and performs a little-endian operation by sampling "L" at the rise of a reset signal. When performing a reset operation, pull it up or down according to the type of endian to be used. Input with Schmitt trigger.
PLLSEL	1	Input	Pin for setting PLL operation with MASK (Input with Schmitt trigger) High(DVCC15) :11~13.5MHz(=X1) Low:8~11MHz(=X1) When performing a reset operation, pull it up or down according to the type of oscillator to be used.
BW0	1	Input	TEST pin: To be fixed to DVCC15:(Input with Schmitt trigger)
BW1	1	Input	TEST pin: To be fixed to DVCC15:(Input with Schmitt trigger)
TEST1	1	Input	TEST pin: Set to OPEN
TEST2	1	Input	TEST pin: Set to OPEN
TEST3	1	Input	TEST pin: Set to OPEN
AVREFH0	1	Input	Reference power supply pin for the A/D converter (H) If the A/D converter is not used, connect (fix) this pin to AVCC3x.
AVREFH1	1	Input	Reference power supply pin for the D/A converter (H) If the A/D converter is not used, connect (fix) this pin to AVCC3x.
AVSS0	1	-	GND pin (0 V) for the D/A converter (0V). Connect this pin to GND even if the D/A converter is not used.
AVCC30	1	-	Power supply pin for the A/D converter. Connect this pin to power supply even if the A/D converter is not used.
AVCC31	1	-	Power supply pin for the A/D converter. Connect this pin to power supply even if the A/D converter is not used.
AVSS1	1	-	GND pin (0 V) for the D/A converter (0V). Connect this pin to GND even if the D/A converter is not used.
CVCC15	1	-	Power supply pin for a high-frequency oscillator: 1.5 V power supply
CVSS	1	-	GND pin (0V) for a high-frequency oscillator
DVCC15	6	-	Power supply pin: 1.5 V power supply
DVCC30	4	-	Power supply pin: 3 V power supply
DVCC31	2	-	Power supply pin: 3 V power supply
DVCC32	1	-	Power supply pin: 3 V power supply
DVCC33	1	-	Power supply pin: 3 V power supply
DVCC34	3	-	Power supply pin: 3 V power supply
DVSS	12	-	Power supply pin: GND pin (0V)
N.C	2		Set to OPEN (FVCC3 pin for FLASH)

2.4 Pin Names and Power Supply Pins

Table 2.4 Pin Names and Power Supplies

Power supply	Pin number	Voltage range	Power supply
P0	DVCC30	PL	DVCC33
P1	DVCC30	PM	DVCC32
P2	DVCC30	PN	DVCC31
P3	DVCC30	PO	DVCC34
P4	DVCC30	PP	DVCC34
P5	DVCC30	PQ	DVCC34
P6	DVCC30	*NMI	DVCC15
P7	AVCC30	PCST4~0	DVCC34
P8	AVCC30	DCLK	DVCC34
P9	AVCC31	*EJE	DVCC34
PA	AVCC31	*TRST	DVCC34
PB	DVCC31	TDI	DVCC34
PC	DVCC31	TDO	DVCC34
PD	DVCC31	TMS	DVCC34
PE	DVCC31	TCK	DVCC34
PF	DVCC32	*DINT	DVCC34
PG	DVCC32	*RESET	DVCC15
PH	DVCC31	PLLSEL	DVCC15
PI	DVCC31	X1, X2	CVCC15
PJ	DVCC32	BUSMD	DVCC15
PK	DVCC33	BW0, BW1	DVCC15

2.5 Pin Numbers and Power Supply Pins

Table 2.5 Pin Numbers and Power Supplies


Power supply	Pin number	Voltage range
DVCC15	M8, M14, N11, H12 H11, N10	1.35V~1.65V
DVCC3	G9, G10, G11, G12, G13, J8, K8, L8, P11, P12,	2.7V~3.3V
AVCC	J13, M13	2.7V~3.3V
CVCC15	N14	1.35V~1.65V

3. Memory Map


Fig. 3.1 and 3.2 show the memory map of the TMP19A63.

The TMP19A63CDXBG have the same functions and configurations as TMP19A63F10XBG except for the internal memory device. The TMP19A63CDXBG are equipped with the internal ROM. The TMP19A63F10XBG is equipped with the internal flash memory. The functions not included in this section are described in the TMP19A63F10XBG datasheet.

1) TMP19A63F10XBG : 1024KB ROM/ 48KB RAM

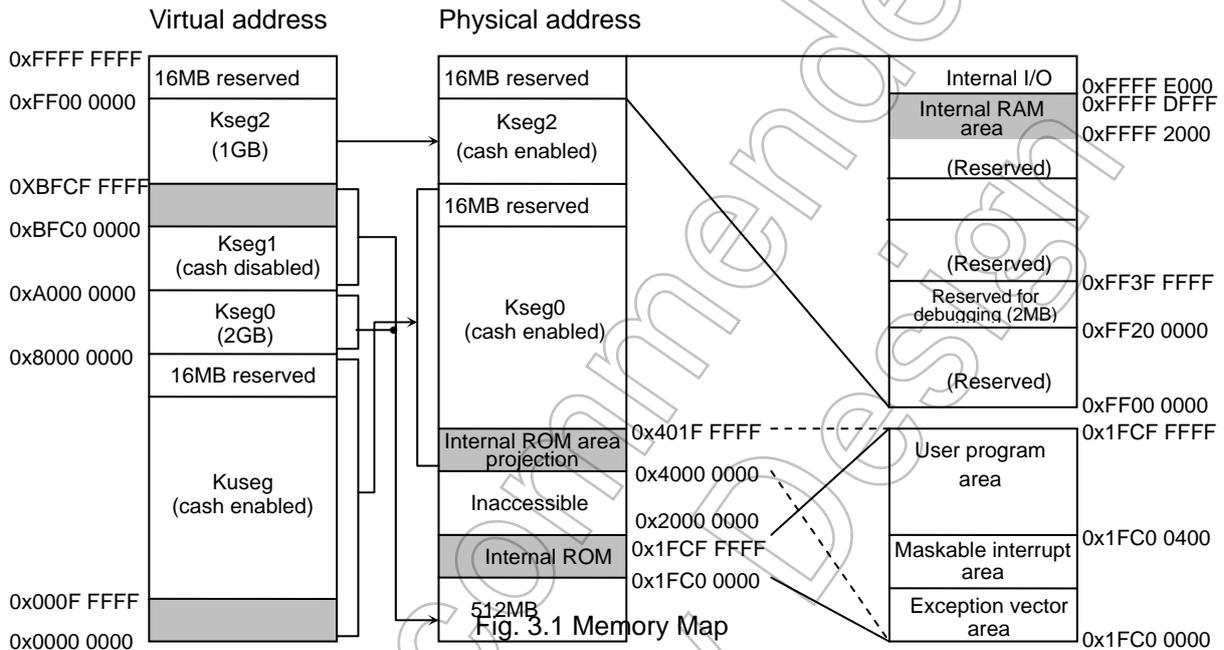

2) TMP19A63CDXBG : 512KB ROM/ 24KB RAM

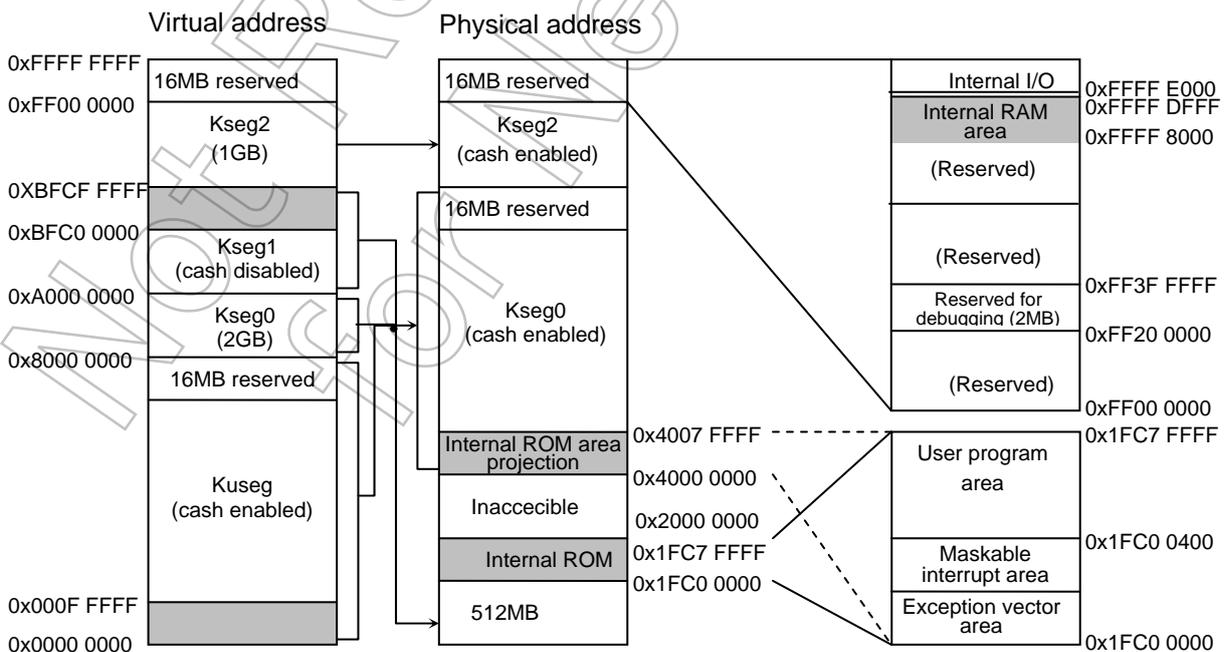

(Note 1) The internal ROM is mapped to:
0x1FC0_0000~0x1FCF_FFFF (1024KB)
0x1FC0_0000~0x1FC7_FFFF (512KB)

The internal RAM is mapped to:
0xFFFF_2000~0xFFFF_DFFF (48KB)
0xFFFF_8000~0xFFFF_DFFF (24KB)

(Note 2) For the TMP19A63, a physical space of only 16 MB is available as external address space to be accessed. It is possible to place this 16-MB physical address space in a chip select area of your choice inside the 3.5-GB physical address space of the CPU. However, it is not possible to set internal memory, internal I/O space and reserved areas.

(Note 3) Do not place an instruction in the last four words of a physical area.
Internal ROM (1024KB): 0x1FCF_FFF0 ~ 0x1FCF_FFFF
Internal ROM (512KB): 0x1FC7_FFF0 ~ 0x1FC7_FFFF
The last four words of an area where memory is mounted for external ROM extension (this varies depending on the system of the user).

Not Recommended
for New Design

4. Electrical Characteristics

4.1 Absolute Maximum Ratings

The letter x in equations represents the cycle period of the fsys clock selected through the programming of the SYSCR1 <SYSCK> bit. The x value may vary if clock gear or low-speed oscillator is used. All relevant values in this chapter are calculated with the high-speed (fc) system clock (SYSCR1.<SYSCK> = 0) and a clock gear factor of 1/1 (SYSCR1.GEAR[1:0] = 00).

Parameter		Symbol	Rating	Unit
Supply voltage		V _{CC15(Core)}	-0.3~3.0	V
		V _{CC3(I/O)}	-0.3~3.9	
		AV _{CC(A/D)}	-0.3~3.9	
Input voltage		V _{IN}	-0.3~V _{CC} +0.3	V
Low-level output current	Per pin	I _{OL}	5	mA
	Total	ΣI _{OL}	50	
High-level output current	Per pin	I _{OH}	-5	
	Total	ΣI _{OH}	50	
Power consumption (Ta = 85°C)		PD	600	mW
Soldering temperature (10s)		T _{SOLDER}	260	°C
Storage temperature		T _{STG}	-40~125	°C
Operating Temperature		T _{OPR}	-20~85	°C

V_{CC15}=DV_{CC15}=CV_{CC15}, V_{CC3}=DV_{CC3n} (n=0~4),
 AV_{CC}=AV_{CC3m} (m=1~2), V_{SS}=DV_{SS*}=AV_{SS*}=CV_{SS}

Note: Absolute maximum ratings are limiting values of operating and environmental conditions which should not be exceeded under the worst possible conditions. The equipment manufacturer should design so that no Absolute maximum rating value is exceeded with respect to current, voltage, power consumption, temperature, etc. Exposure to conditions beyond those listed above may cause permanent damage to the device or affect device reliability, which could increase potential risks of personal injury due to IC blowup and/or burning.

4.2 DC Electrical Characteristics (1/4)

Ta=-20~85°C (n=0~4, m=1, 2)

Parameter		Symbol	Rating	Min.	Typ. (Note 1)	Max.	Unit
Supply voltage CVCC15=DVCC15 CVSS=DVSS=0V		DVCC15	fosc = 8~13.5MHz fsys = 4MHz~54MH PLLON,	1.35		1.65	V
		DVCC3n (n=0~4)	fsys = 4~54MHz	1.65		3.3	
Low-level input voltage	P7~PA	V _{IL1}	2.7V≤AVCC32≤AVCC31≤3.3V			0.3AVCC31 0.3AVCC32	V
	Normal port	V _{IL2}	1.65V≤DVCC3n≤3.3V (n=0~4)			0.3DVCC3n	
			1.65V≤DVCC3n≤3.3V(n=0~4)	-0.3		0.2DVCC3n	
	Schmitt-Triggered port	V _{IL3}	1.35V≤DVCC15≤1.65V			0.1DVCC15	
X1	V _{IL5}	1.35V≤CVCC15≤1.65V			0.1CVCC15		

Not Recommended for New

4.3 DC Electrical Characteristics (2/4)

Ta=-20~85°C (n=0~4, m=1, 2)

Parameter		Symbol	Rating	Min.	Typ. (Note 1)	Max.	Unit
High-level input voltage	P7~PA	V_{IH1}	$2.7V \leq AVCC32 \leq AVCC31 \leq 3.3V$	$0.7AVCC31$ $0.7AVCC32$		$AVCC31+0.3$ $AVCC32+0.3$	V
	Normal port	V_{IH2}	$1.65V \leq DVCC3n \leq 3.3V (n=0\sim4)$	$0.7DVCC3n$		$DVCC3n+0.3$	
	Schmitt-Triggered port	V_{IH3}	$1.65V \leq DVCC3n \leq 3.3V (n=0\sim4)$	$0.8DVCC3n$			
			$1.35V \leq DVCC15 \leq 1.65V$	$0.9DVCC15$	$DVCC15+0.2$		
	X1	V_{IH4}	$1.35V \leq CVCC15 \leq 1.65V$	$0.9CVCC15$	$CVCC15+0.2$		
Low-level output voltage	V_{OL}	$I_{OL}=2mA$	$DVCC3n \geq 2.7V$		0.4	V	
		$I_{OL}=500\mu A$	$DVCC3n < 2.7V$		0.4		
High-level output voltage	V_{OH}	$I_{OH}=2mA$	$DVCC3n \geq 2.7V$	2.4			
		$I_{OH}=500\mu A$	$DVCC3n < 2.7V$	$0.8DVCC3n$			

(Note 1) Ta=25°C, DVCC15=1.5V, DVCC3n=3.0V, AVCC3m=3.3V, unless otherwise noted.

Not Recommended for New

4.4 DC Electrical Characteristics (3/4)

Ta=-20~85°C (n=0~4, m=1, 2)

Parameter	Symbol	Rating	Min.	Typ. (Note 1)	Max.	Unit
Input leakage current	I_{LI}	$0.0 \leq V_{IN} \leq DVCC15$ $0.0 \leq V_{IN} \leq DVCC3n(n=0\sim4)$ $0.0 \leq V_{IN} \leq AVCC31$ $0.0 \leq V_{IN} \leq AVCC32$		0.02	± 5	μA
Output leakage current	I_{LO}	$0.2 \leq V_{IN} \leq DVCC15-0.2$ $0.2 \leq V_{IN} \leq DVCC3n-0.2(n=0\sim4)$ $0.2 \leq V_{IN} \leq AVCC31-0.2$ $0.2 \leq V_{IN} \leq AVCC32-0.2$		0.05	± 10	
Power down voltage (@STOP)	V_{STOP} (DVCC15)		1.35		1.65	V
	V_{STOP2} (AVCC3)	$V_{IL1}=0.3AVCC31,32$ $V_{IH1}=0.7AVCC31,32$	2.7		3.3	
	V_{STOP3} (DVCC3)	$V_{IL2}=0.3DVCC3n, V_{IL3}=0.1DVCC3n$ $V_{IH2}=0.7DVCC3n, V_{IH3}=0.9DVCC3n$ (n=0~4)	1.65		3.3	
Pull-up resistor at Reset	RRST	$DVCC15=1.5V \pm 0.15V$	20	50	150	$k\Omega$
Schmitt-Triggered port	VTH	$1.65V \leq DVCC3n \leq 3.3V(n=0\sim4)$ $1.35V \leq DVCC15 \leq 1.65V$	0.3	0.6		V
Programmable pull-up/ pull-down resistor	PKH	$DVCC3n=1.65V\sim3.3V(n=0\sim4)$ $DVCC15=1.35V\sim1.65V$	20	50	150	$k\Omega$
Pin capacitance (Except power supply pins)	C_{IO}	$F_c=1MHz$			10	pF

(Note 1) Ta=25°C, DVCC15=1.5V, DVCC3=3.0V, AVCC3m=3.3V, unless otherwise noted.

4.5 DC Electrical Characteristics (4/4)

DVCC15=CVCC15=1.5V±0.15V,
 DVCC3n=3.0V±0.3V, AVCC3m=3.0V±0.3V,
 Ta=-20~85°C (n=0~4, m=1, 2)

Parameter	Symbol	Rating	Min.	Typ. (Note 1)	Max.	Unit
NORMAL(Note 2) Gear 1/1	I _{CC}	F _{sys} =54 MHz (f _{osc} =13.5 MHz, PLLON)		39	49	mA
IDLE(Doze)				18	28	
IDLE(Halt)				14	23	
STOP		DVCC15= CVCC15=1.35~1.65V DVCC3n=1.65~3.3V AVCC3m=2.7~3.3V		30	2000	μA

(Note 1) Ta=25°C, DVCC15=1.5V, DVCC15x=1.5V, DVCC3n=3.0V, AVCC3m=3.3V, unless otherwise noted.

(Note 2) I_{CC} NORMAL

Measured with the CPU dhrystone operating and all the embedded peripheral I/O operating by the 4 system clock of external bus 16-bit width.

(Note 3) The currents flow through DVCC15, DVCC3n, CVCC15 and AVCC3m are included.

Not Recommended for New Design

4.6 10-bit ADC Electrical Characteristics

DVCC15=CVCC15=1.35V~1.65V, CVCC3= DVCC3=AVCC3=VREFH=2.7V~3.3V,
 AVCC=2.3V~2.7V, AVSS=DVSS, Ta=-20~85°C
 AVCC3 load capacitance $\geq 3.3\mu\text{F}$, VREFH load capacitance $\geq 3.3\mu\text{F}$

Parameter	Symbol	Rating	Min	Typ	Max	Unit
Analog reference voltage (+)	VREFH		2.7	3.3	3.3	V
Analog reference voltage (-)	VREFL		AVSS	AVSS	AVSS	V
Analog input voltage	VAIN		VREFL		VREFH	V
Analog supply current	A/D conversion	IREF	DVSS = AVSS = VREFL	4.5	5.5	mA
	Non-A/D conversion			± 0.02	± 5	μA
Supply current	A/D conversion	-	Non-IREF		3	mA
INL error	-	AIN resistance $\leq 1\text{k}\Omega$ AIN load capacitance $\geq 0.1\mu\text{F}$ Conversion time $\geq 2.0\mu\text{s}$ @27MHz(ADCLK)		± 2	± 3	LSB
DNL error				± 1	± 2	
Offset error				± 2	± 4	
Full-scale error				± 2	± 4	
INL error	-	AIN resistance $\leq 10\text{k}\Omega$ AIN load capacitance $\geq 0.01\mu\text{F}$ Conversion time $\geq 2.0\mu\text{s}$ @27MHz(ADCLK)		± 2	± 3	
DNL error				± 1	± 2	
Offset error				± 2	± 4	
Full-scale error				± 2	± 4	
INL error	-	AIN resistance $\leq 600\Omega$ AIN load capacitance $\leq 30\text{pF}$ Conversion time $\geq 1.15\mu\text{s}$ @40MHz(ADCLK)		± 2	± 3	
DNL error				± 1	± 2	
Offset error				± 2	± 4	
Full-scale error				± 2	± 4	

(Note 1) $1\text{LSB}=(\text{VREFH}-\text{VREFL})/1024[\text{V}]$

4.7 AC Electrical Characteristics

[1] Separate bus mode

(1) DVCC15=CVCC15=1.35V~1.65V, DVCC3n=2.3V~3.3V

SYSCR3<ALESEL>="0", 2 programmed wait state

No.	Parameter	Symbol	Equation		54 MHz (fsys)		Unit
			Min	Max	Min	Max	
1	System clock period (x)	t _{SYS}	x		18.5		ns
2	A0-23 valid to \overline{RD} / \overline{WR} / \overline{HWR} asserted	t _{AC}	(1+ALE)x-20		17		ns
3	A0 – 23 hold after \overline{RD} / \overline{WR} or \overline{HWR} negated	t _{CAR}	x-14		4.5		ns
4	A0 – 23 valid to D0 – 15 data in	t _{AD}		$x(2+W+ALE)-42$		50.5	ns
5	\overline{RD} asserted to D0 – 15 data in	t _{RD}		$x(1+W)-28$		27.5	ns
6	\overline{RD} pulse width low	t _{RR}	$x(1+W)-10$		45.5		ns
7	D0 – 15 hold after \overline{RD} negated	t _{HR}	0		0		ns
8	\overline{RD} negated to A0 – 23 output	t _{RAE}	x-15		3.5		ns
9	\overline{WR} / \overline{HWR} pulse width low	t _{WW}	$x(1+W)-10$		45.5		ns
10	\overline{WR} or \overline{HWR} asserted to D0-15 valid	t _{DO}		12.3		12.3	ns
11	D0-15 valid to \overline{WR} / \overline{HWR} negated	t _{DW}	$x(1+W)-18$		37.5		ns
12	D0 – 15 hold after \overline{WR} / \overline{HWR} rising	t _{WD}	x-15		3.5		ns
13	A0 - 23 valid to \overline{WAIT} input	t _{AW}		$x+(ALE)x+(w-1)x-30$		25.5	ns
14	\overline{WAIT} hold after \overline{RD} / \overline{WR} / \overline{HWR}	t _{CW}	$x(TW-3)-1$	$x(TW-1)-30$	17.5	25.5	ns

(Note) No. 1 to 14:

Internal 2 wait insertion, ALE "1" Clock, @54MHz

TW = W + 2N,

ALE=ALE output width

No. 21

(2W+2N)

W: Number of Auto wait insertion, 2N: Number of external wait insertion

TW = 2 + 2*1 = 4

AC measurement conditions:

Output levels: High = 0.8DVCC33 V/Low 0.2DVCC33 V, CL = 30 pF

Input levels: High = 0.7DVCC33 V/Low 0.3DVCC33 V

(2) DVCC15=CVCC15=1.35V~1.65V, DVCC3n=1.65V~1.95V, DVCC15 ≤ DVCC3n+0.2V

SYSCR3<ALESEL> = "0", 2 programmed wait state

No.	Parameter	Symbol	Equation		54 MHz (fsys)		Unit
			Min	Max	Min	Max	
1	System clock period (x)	t _{SYS}	x		18.5		ns
2	A0-23 valid to \overline{RD} / \overline{WR} / \overline{HWR} asserted	t _{AC}	(1+ALE)x-20		17		ns
3	A0 – 23 hold after \overline{RD} / \overline{WR} or \overline{HWR} negated	t _{CAR}	x-7		11.5		ns
4	A0 – 23 valid to D0 – 15 data in	t _{AD}		$\frac{x(2+W+ALE)-4}{2}$		50.5	ns
5	\overline{RD} asserted to D0 – 15 data in	t _{RD}		$x(1+W)-28$		27.5	ns
6	\overline{RD} pulse width low	t _{RR}	$x(1+W)-10$		45.5		ns
7	D0 – 15 hold after \overline{RD} negated	t _{HR}	0		0		ns
8	\overline{RD} negated to next A0 – 23 output	t _{RAE}	x-15		3.5		ns
9	\overline{WR} / \overline{HWR} pulse width low	t _{WW}	$x(1+W)-10$		45.5		ns
10	\overline{WR} or \overline{HWR} asserted to D0-15 valid	t _{DO}		12.3		12.3	ns
11	D0-15 valid to \overline{WR} / \overline{HWR} negated	t _{DW}	$x(1+W)-18$		37.5		ns
12	D0 – 15 hold after \overline{WR} / \overline{HWR} negated	t _{WD}	x-15		3.5		ns
13	A0 – 23 valid to \overline{WAIT} input	t _{AW}		$\frac{x+(ALE)x+(w-1)}{x-30}$		25.5	ns
14	\overline{WAIT} hold after \overline{RD} / \overline{WR} / \overline{HWR}	t _{CW}	$x(TW-3)-7$	$x(TW-1)-40$	13.5	15.5	ns

(Note)

No. 1 to 14:

Internal 2 wait insertion, ALE "1" Clock, @54MHz

TW = W + 2N,

ALE=ALE output width

No. 21

(2W+2N)

W: Number of Auto wait insertion, 2N: Number of external wait insertion


TW = 2 + 2*1 = 4

AC measurement conditions:

Output levels: High = 0.8DVCC33 V/Low 0.2DVCC33 V, CL = 30 pF


Input levels: High = 0.7DVCC33 V/Low 0.3DVCC33 V

(1) Read cycle timing (SYSCR3<ALESEL>="0", 1 programmed wait state)

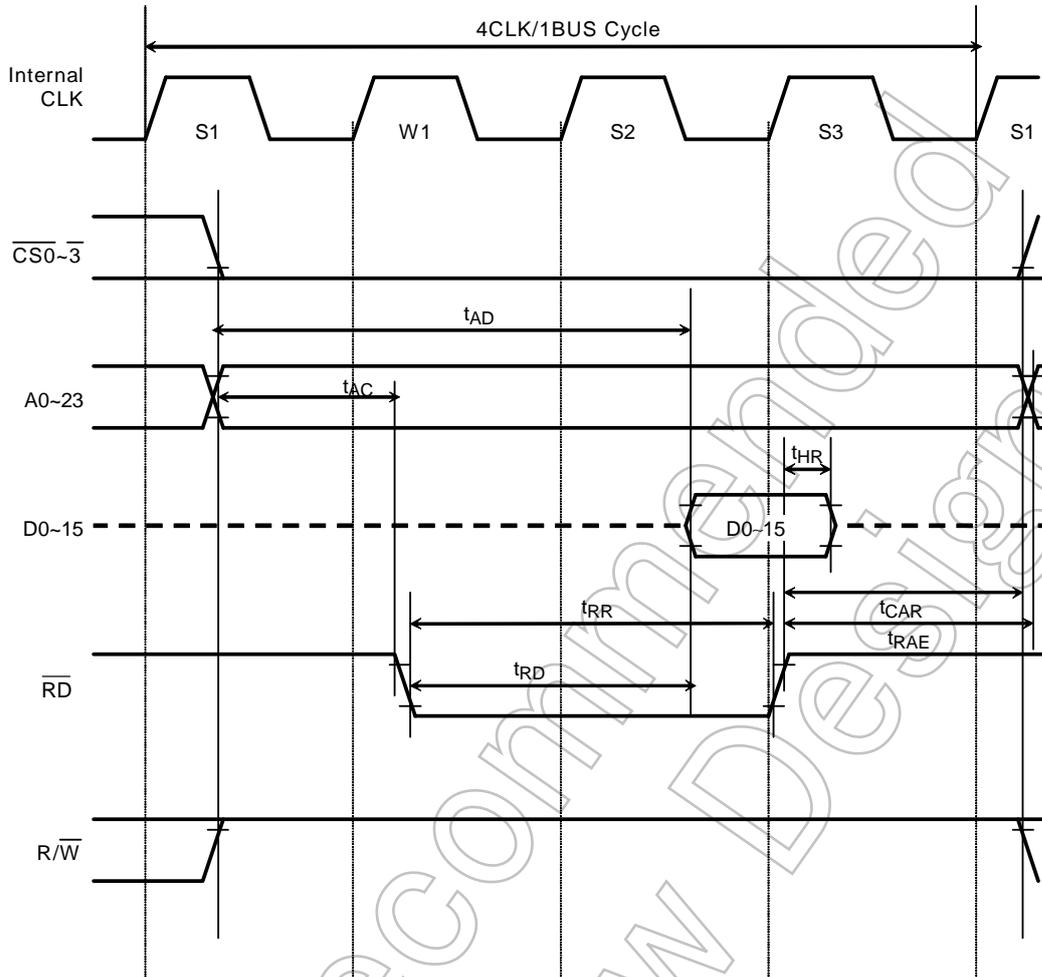


Not Recommended for New Design

(2) Read timing (SYSCR3<ALESEL>="1", 1 programmed wait state)

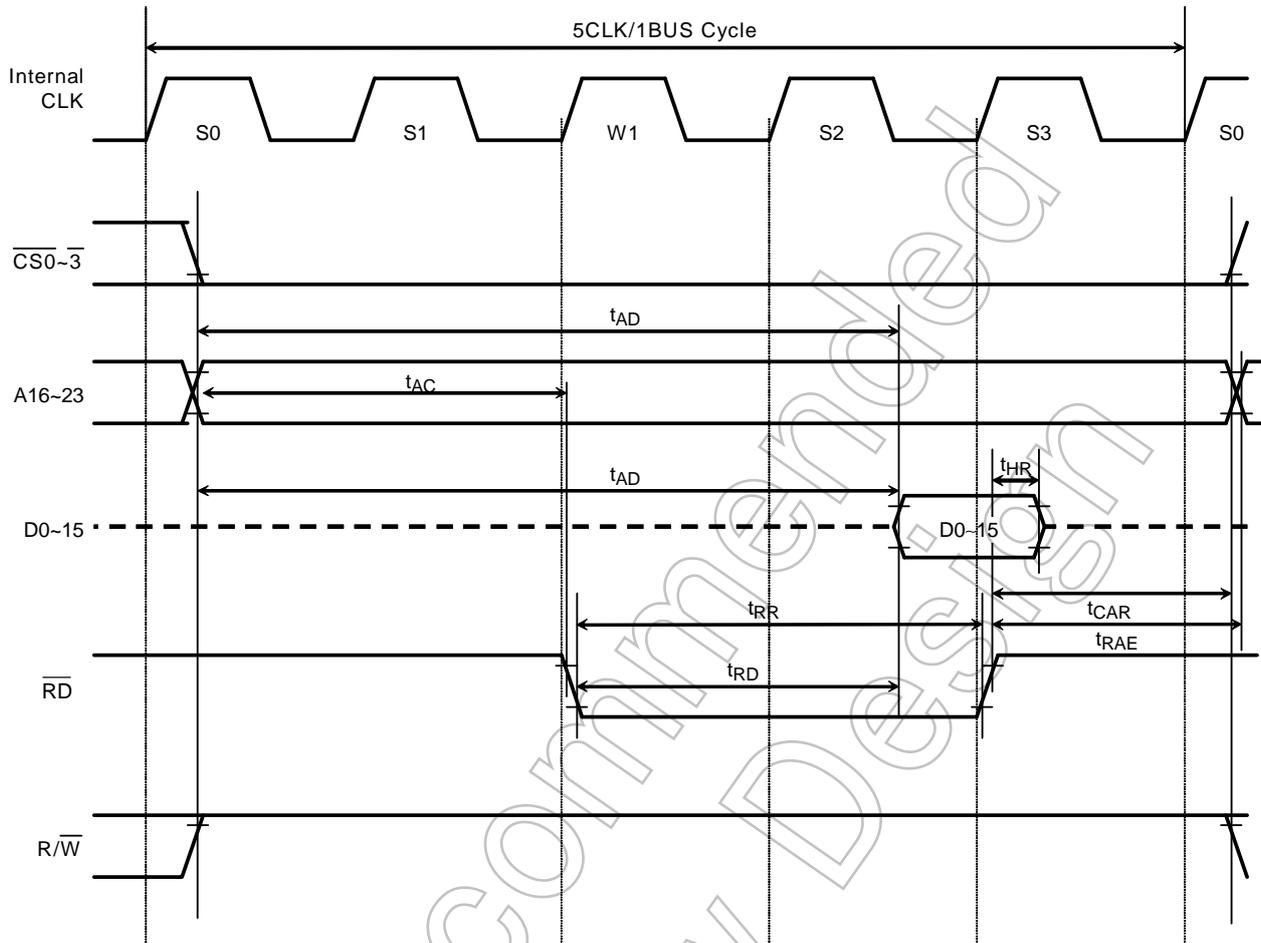


Not Recommended for New Design

(3) Read timing (SYSCR3<ALESEL>="1", 2 wait (1+N externally generated wait states with N=1)

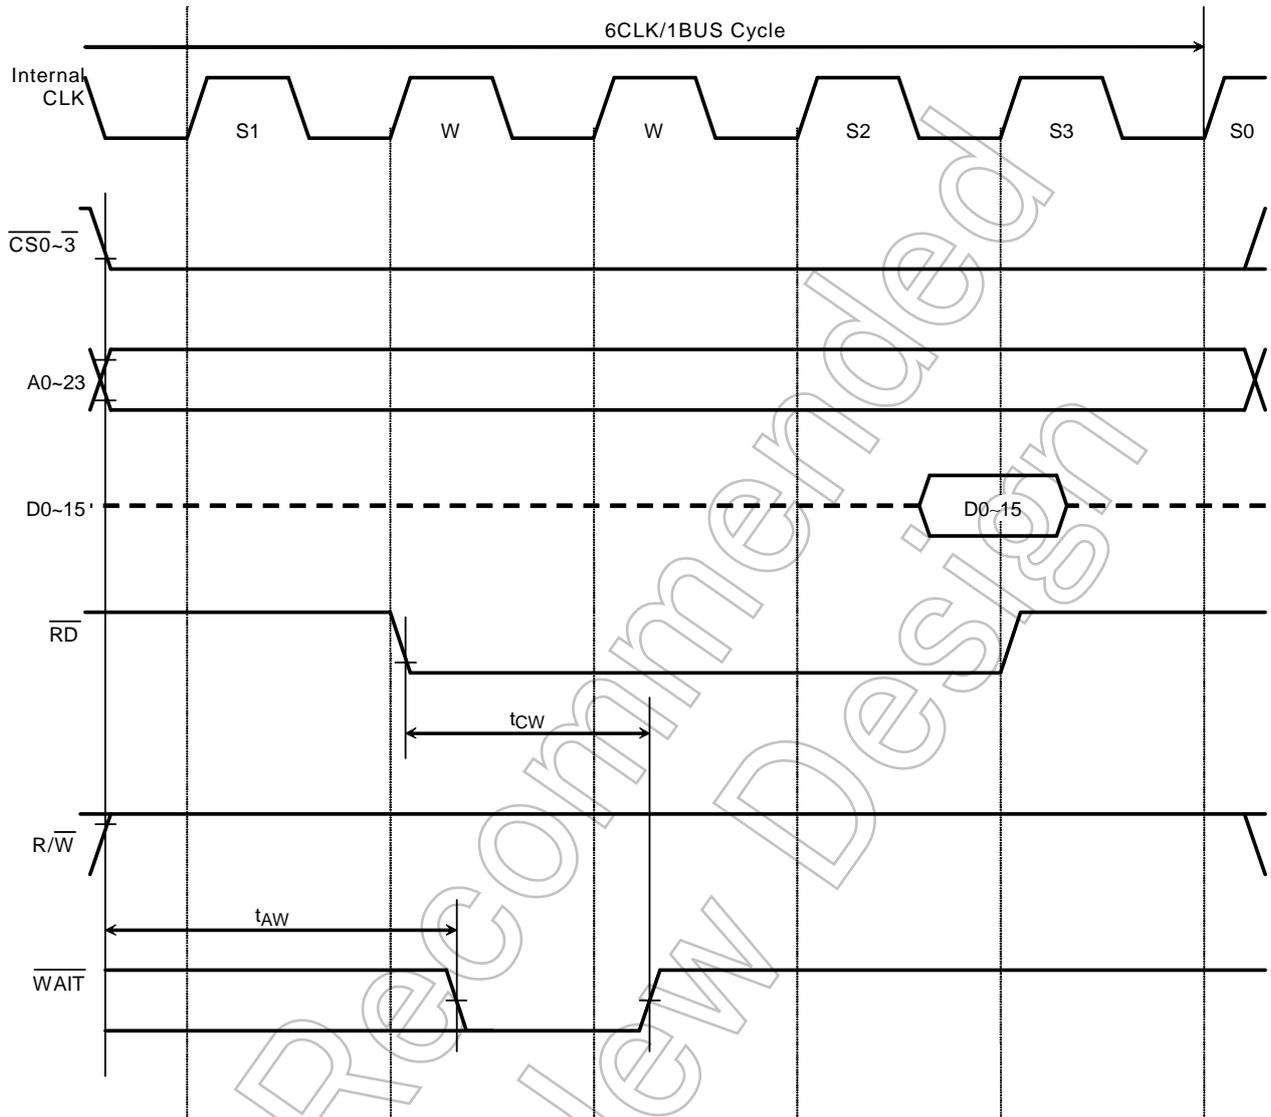


Not Recommended for New Designs

(4) Read timing (SYSCR3<ALESEL>="1", 4 wait (3+N externally generated wait states with N=1))

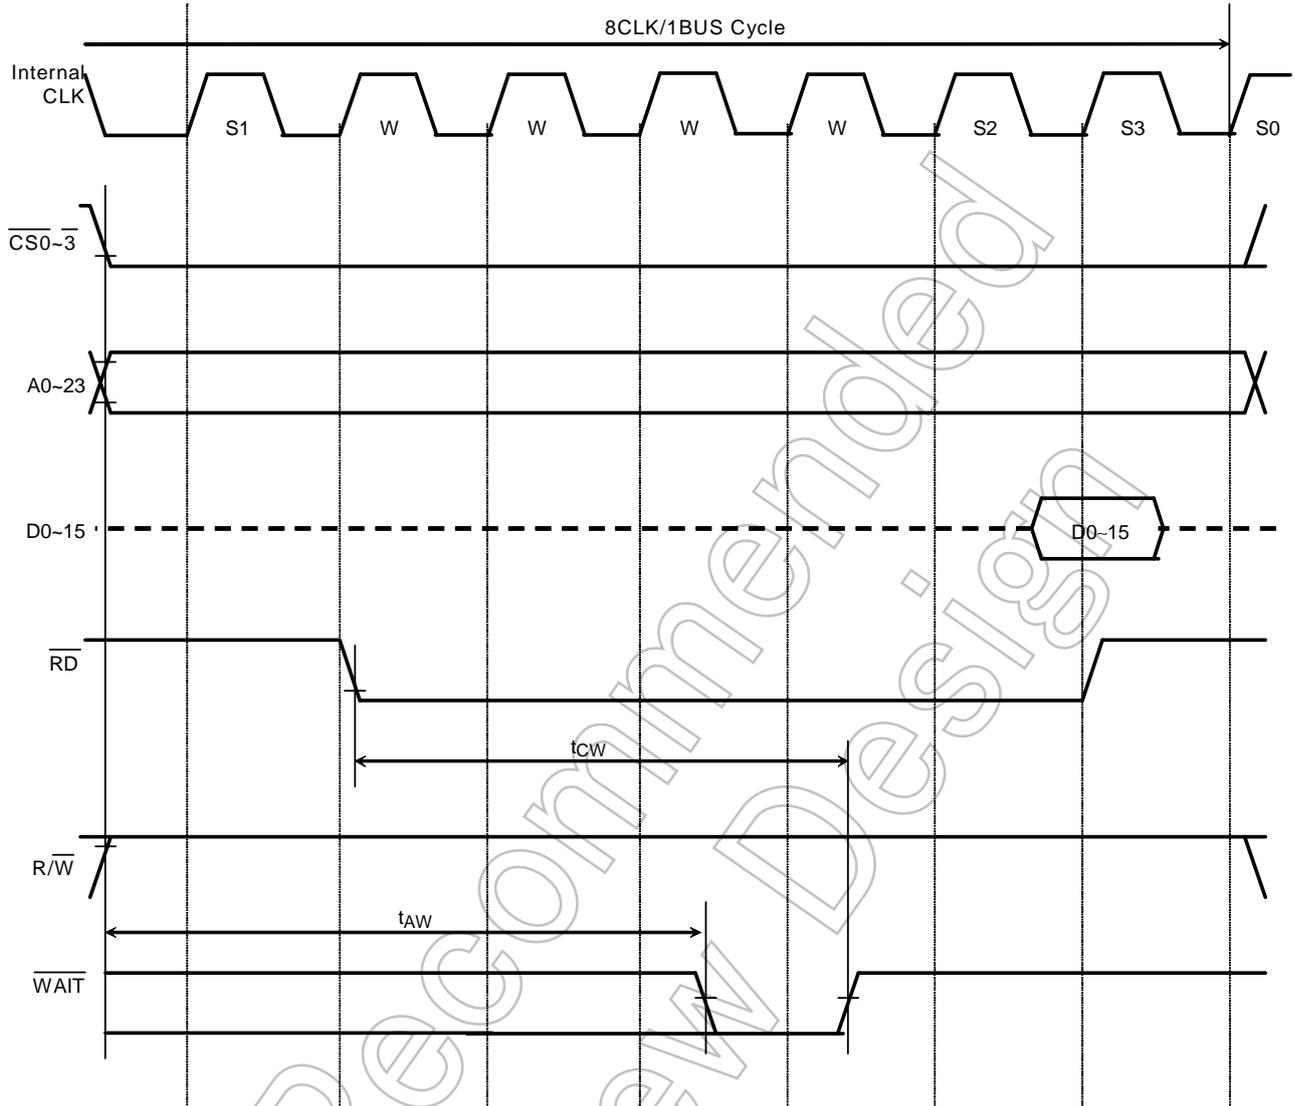

Not Recommended for New Designs

(5) Write timing (SYSCR3<ALESEL>="1", 0 wait state)

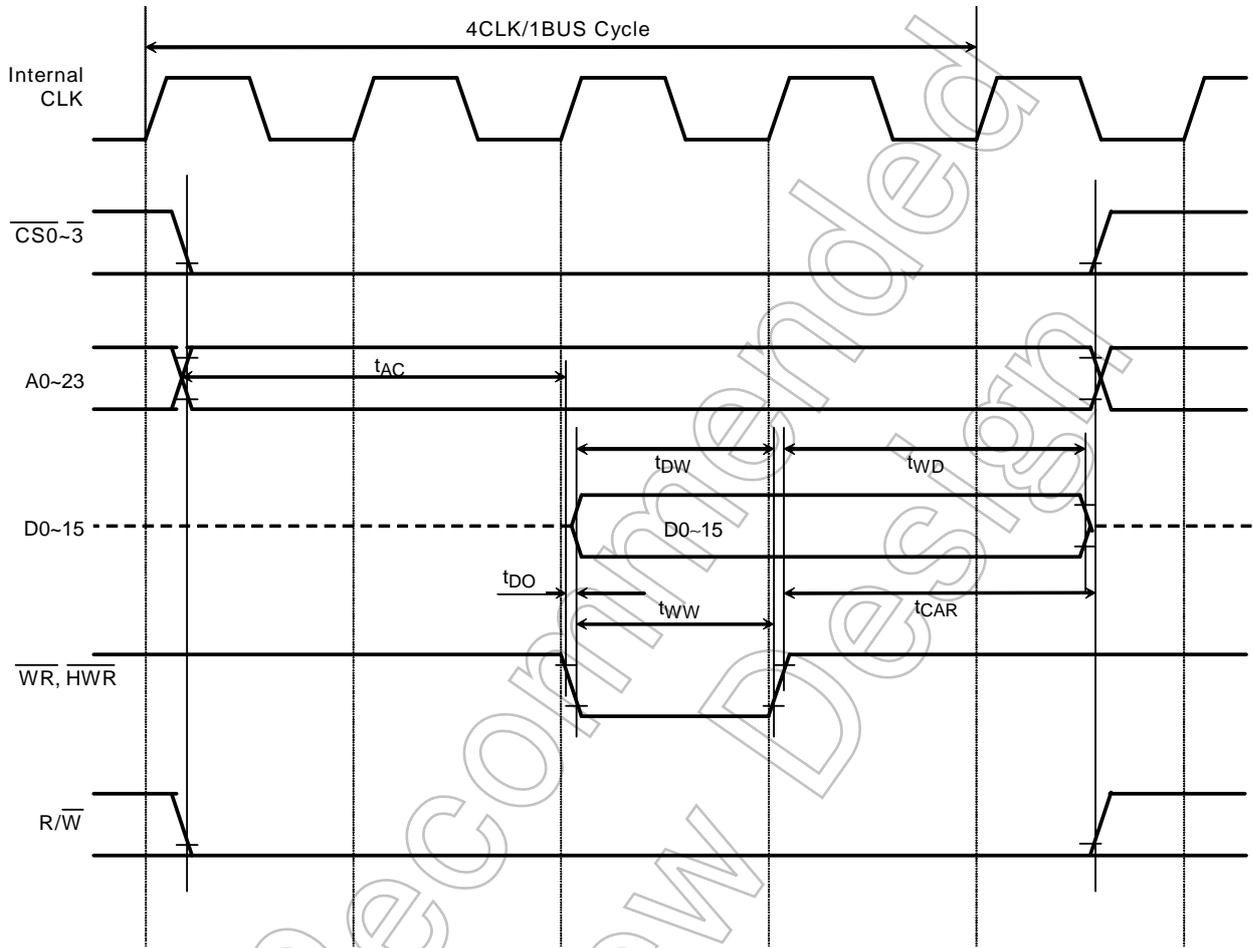

Not Recommended for New

[2] Multiplex bus mode

(1) DVCC15=CVCC15=1.35V~1.65V, DVCC3n=2.3V~3.3V

1) ALE=1 clock cycle, 2 programmed wait state

No.	Parameter	Symbol	Equation		54 MHz (fsys)		Unit
			Min	Max	Min	Max	
1	System clock period (x)	t _{sys}	x		18.5		ns
2	A0-15 valid to ALE low	t _{AL}	(ALE)x-12		6.5		ns
3	A0-15 hold after ALE low	t _{LA}	x-8		10.5		ns
4	ALE pulse width high	t _{LL}	(ALE)x-6		12.5		ns
5	ALE low to \overline{RD} / \overline{WR} or \overline{HWR} asserted	t _{LC}	x-8		10.5		ns
6	\overline{RD} / \overline{WR} or \overline{HWR} negated to ALE high	t _{CL}	x-15		3.5		ns
7	A0-15 valid to \overline{RD} / \overline{WR} or \overline{HWR} asserted	t _{ACL}	2x-20		17.0		ns
8	A16-23 valid to \overline{RD} / \overline{WR} or \overline{HWR} asserted	t _{ACH}	2x-20		17.0		ns
9	A16-23 hold after \overline{RD} / \overline{WR} or \overline{HWR} negated	t _{CAR}	x-14		4.5		ns
10	A0-15 valid to D0-15 data in	t _{ADL}		x(2+W+ALE)-42		50.5	ns
11	A16-23 valid to D0-15 data in	t _{ADH}		x(2+W+ALE)-42		50.5	ns
12	\overline{RD} asserted to D0-15 data in	t _{RD}		x(1+W)-28		27.5	ns
13	\overline{RD} pulse width low	t _{RR}	x(1+W)-10		45.5		ns
14	D0-15 hold after \overline{RD} negated	t _{HR}	0		0		ns
15	\overline{RD} negated to next A0-15 output	t _{RAE}	x-15		3.5		ns
16	\overline{WR} / \overline{HWR} pulse width low	t _{WW}	x(1+W)-10		45.5		ns
17	D0-15 valid to \overline{WR} or \overline{HWR} negated	t _{DW}	x(1+W)-18		37.5		ns
18	D0-15 hold after \overline{WR} or \overline{HWR} negated	t _{WD}	x-15		3.5		ns
19	A16-23 valid to \overline{WAIT} input	t _{AWH}		x+(ALE)x+(W-1)x-3 0		25.5	ns
20	A0-15 valid to \overline{WAIT} input	t _{AWL}		x+(ALE)x+(W-1)x-3 0		25.5	ns
21	\overline{WAIT} hold after \overline{RD} / \overline{WR} or \overline{HWR}	t _{CW}	x(TW-3)-1	x(TW-1)-30	17.5	25.5	ns

(Note)

No. 1 to 21:

Internal 2 wait insertion, ALE "4" Clock, @54MHz

TW = W + 2N,

W: Number of Auto wait insertion, 2N: Number of external wait insertion

ALE=ALE output width

TW = 2 + 2*1 = 4

AC measurement conditions:

Output levels: High = 0.8DVCC33 V/Low 0.2DVCC33 V, CL = 30 pF

Input levels: High = 0.7DVCC33 V/Low 0.3DVCC33 V

(2) DVCC15=CVCC15=1.35V~1.65V, DVCC3n=1.65V~1.95V, DVCC15 ≤ DVCC3n+0.2V

ALE=1 clock cycle, 2 programmed wait state

No.	Parameter	Symbol	Equation		54 MHz (fsys)		Unit
			Min	Max	Min	Max	
1	System clock period (x)	t _{SYS}	x		18.5		ns
2	A0-15 valid to ALE low	t _{AL}	(ALE)x-12		6.5		ns
3	A0-15 hold after ALE low	t _{LA}	x-8		10.5		ns
4	ALE pulse width high	t _{LL}	(ALE)x-6		12.5		ns
5	ALE low to \overline{RD} / \overline{WR} or \overline{HWR} asserted	t _{LC}	x-8		10.5		ns
6	\overline{RD} / \overline{WR} or \overline{HWR} negated to ALE high	t _{CL}	x-15		3.5		ns
7	A0-15 valid to \overline{RD} / \overline{WR} or \overline{HWR} asserted	t _{ACL}	2x-20		17.0		ns
8	A16-23 valid to \overline{RD} / \overline{WR} or \overline{HWR} asserted	t _{ACH}	2x-20		17.0		ns
9	A16-23 hold after \overline{RD} / \overline{WR} or \overline{HWR} negated	t _{CAR}	x-7		11.5		ns
10	A0-15 valid to D0-15 data in	t _{ADL}		x(2+W+ALE)-42		50.5	ns
11	A16-23 valid to D0-15 data in	t _{ADH}		x(2+W+ALE)-42		50.5	ns
12	\overline{RD} asserted to D0-15 data in	t _{RD}		x(1+W)-28		27.5	ns
13	\overline{RD} pulse width low	t _{RR}	x(1+W)-10		45.5		ns
14	D0-15 hold after \overline{RD} negated	t _{HR}	0		0		ns
15	\overline{RD} negated to next A0-15 output	t _{RAE}	x-15		3.5		ns
16	\overline{WR} / \overline{HWR} pulse width low	t _{WW}	x(1+W)-10		45.5		ns
17	D0-15 valid to \overline{WR} / \overline{HWR} negated	t _{DW}	x(1+W)-18		37.5		ns
18	D0-15 hold after \overline{WR} / \overline{HWR} negated	t _{WD}	x-15		3.5		ns
19	A16-23 valid to \overline{WAIT} input	t _{AWH}		x+(ALE)x+(W-1)x-3 0		25.5	ns
20	A0-15 valid to \overline{WAIT} input	t _{AWL}		x+(ALE)x+(W-1)x-3 0		25.5	ns
21	\overline{WAIT} hold after \overline{RD} / \overline{WR} or \overline{HWR}	t _{CW}	x(TW-3)-7	x(TW-1)-40	13.5	15.5	ns

(Note)

No. 1 to 21:

Internal 2 wait insertion, ALE "1" Clock, @54MHz

TW = W + 2N,

W: Number of Auto wait insertion, 2N: Number of external wait insertion

ALE=ALE output width

No. 21

(2W+2N)


TW = 2 + 2*1 = 4

AC measurement conditions:


Output levels: High = 0.8DVCC33 V/Low 0.2DVCC33 V, CL = 30 pF

Input levels: High = 0.7DVCC33 V/Low 0.3DVCC33 V


(1) Read timing (ALE=1 clock cycle, 1 programmed wait state)

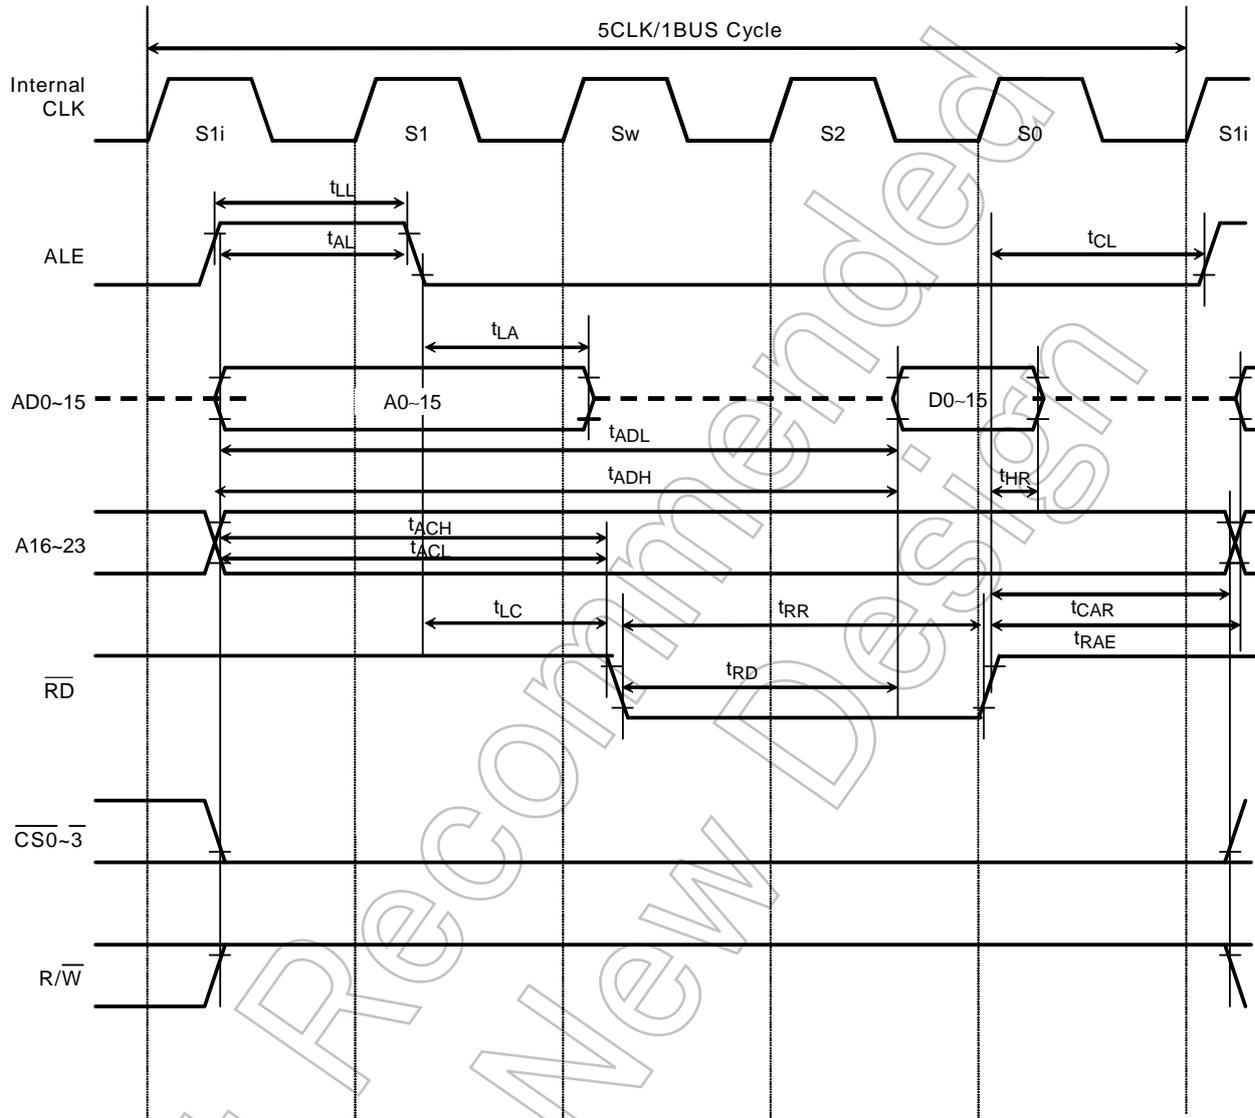

(2) Read timing (ALE=1 clock cycle, 2 programmed wait state)

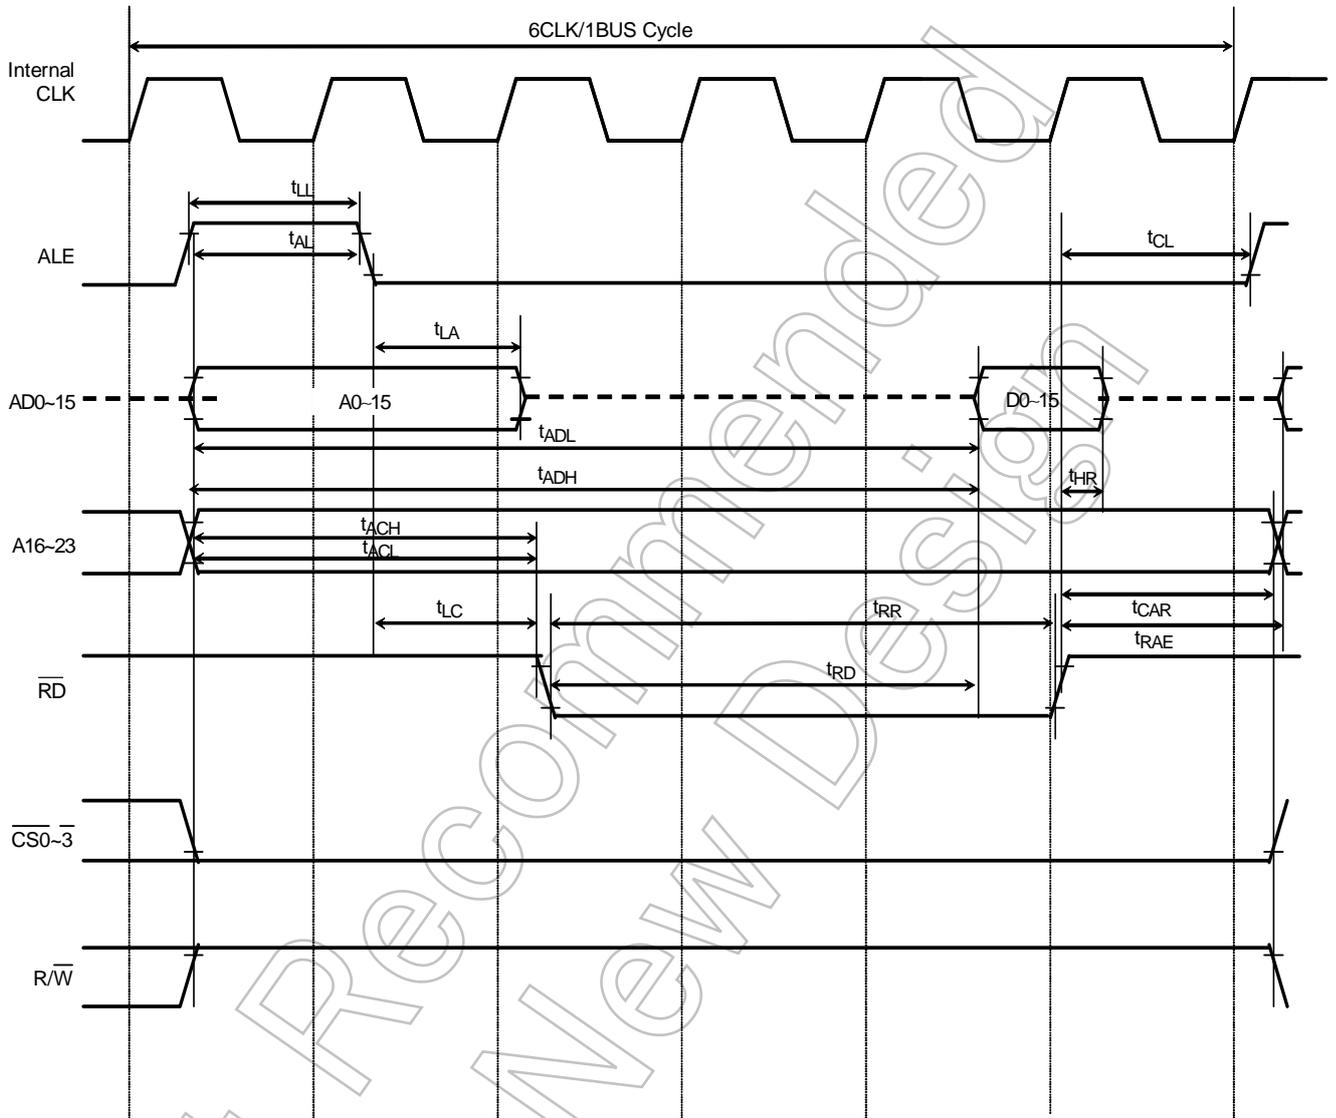


(3) Read timing (ALE = 1 clock cycle, 4 externally generated wait states (2+2N) with N=1)

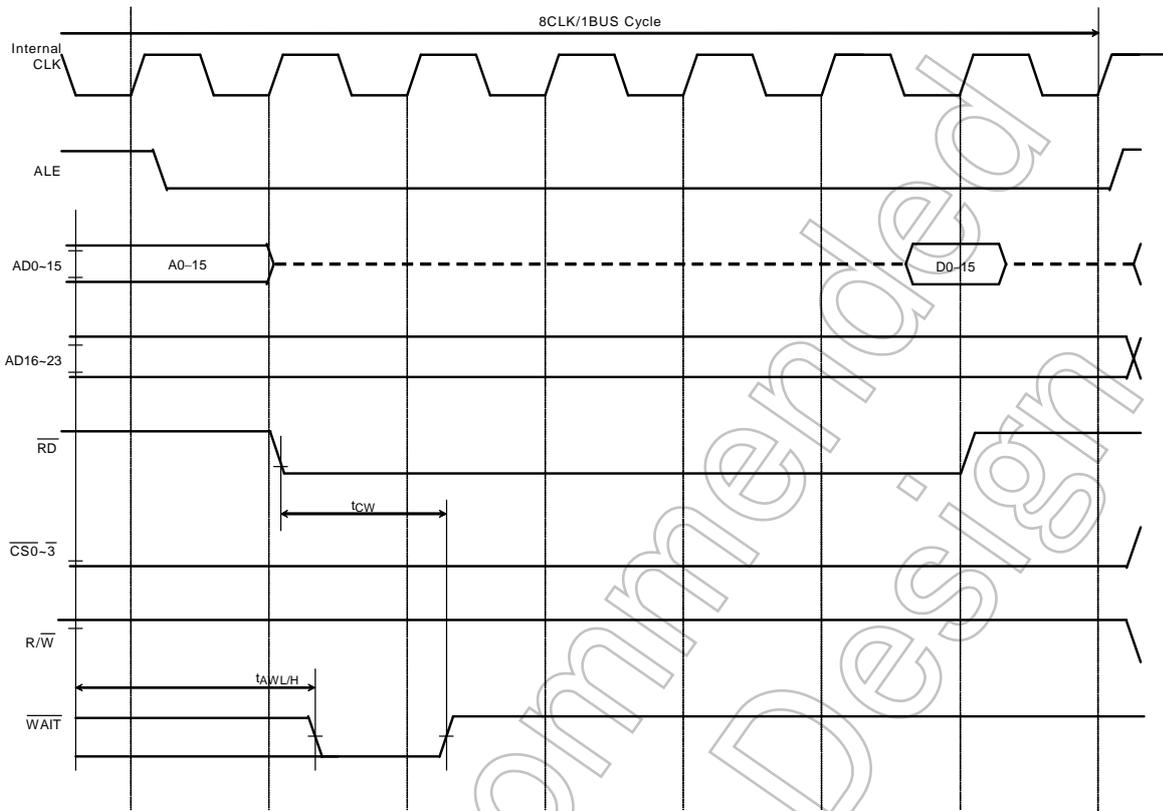


Not Recommended for New Design

(4) Read timing (ALE = 2 clock cycle, 1 programmed wait state)

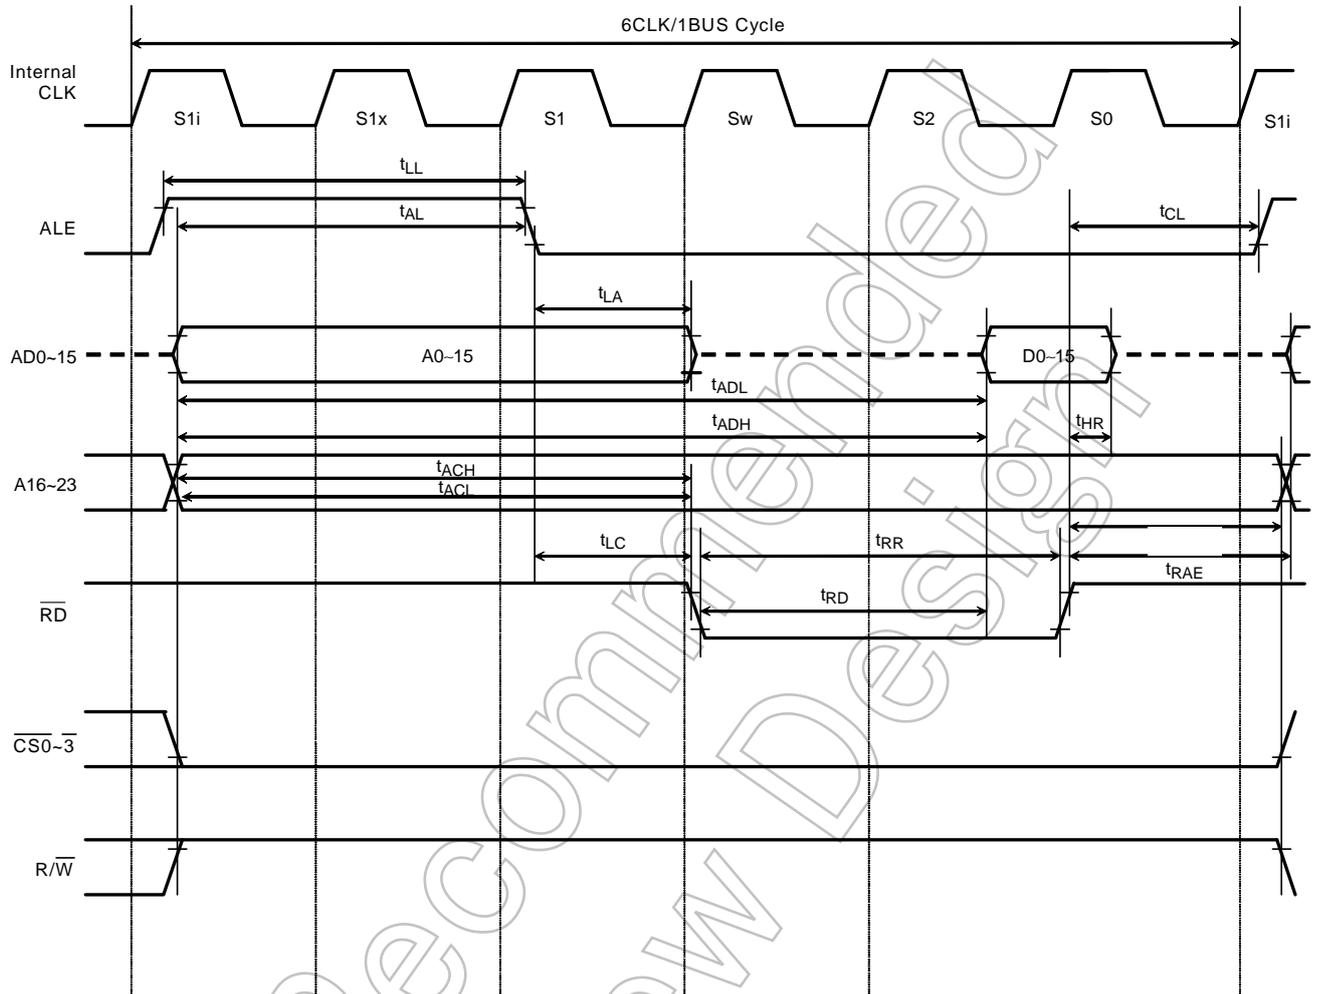


Not Recommended for New

(5) Read timing (ALE = 2clock cycles, 4 externally generated wait states (2+2N) with N=1

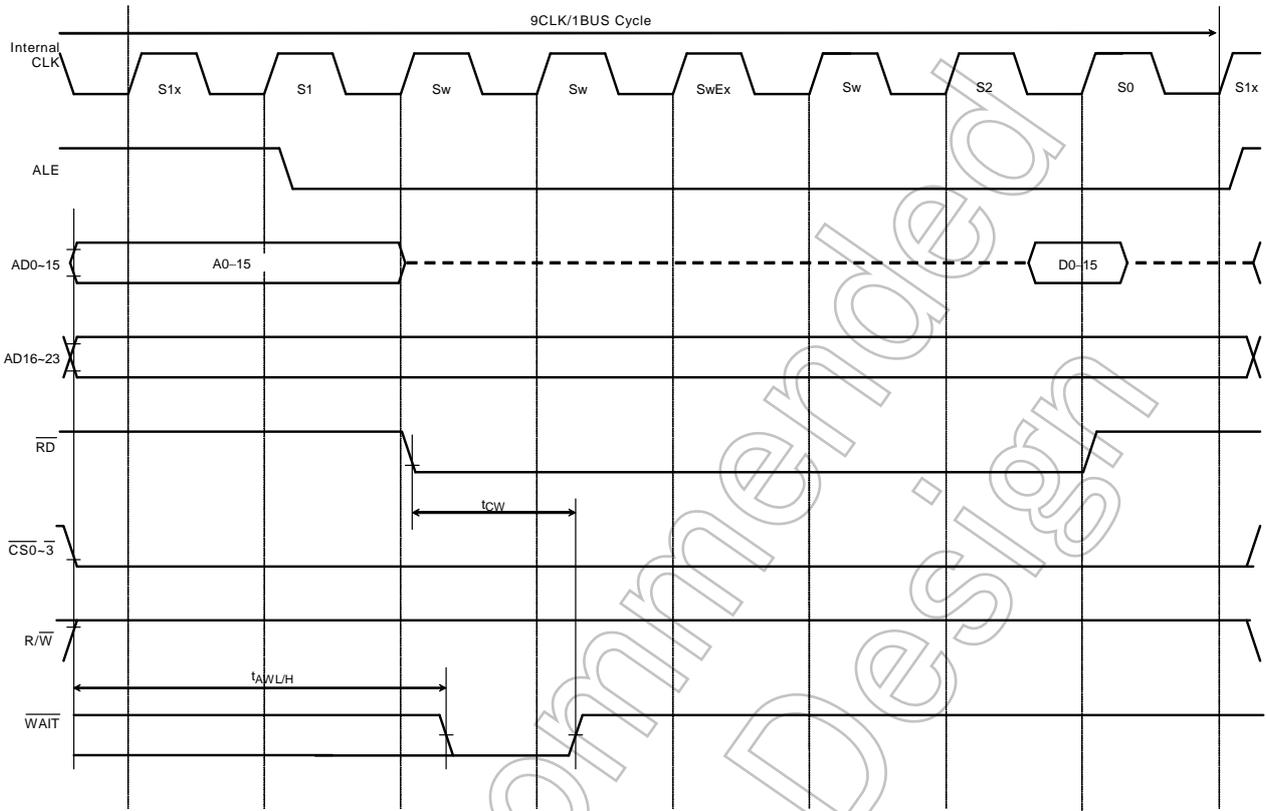


Not Recommended for New Design

(6) Write timing (ALE = 2 clock timing, 0 wait state)

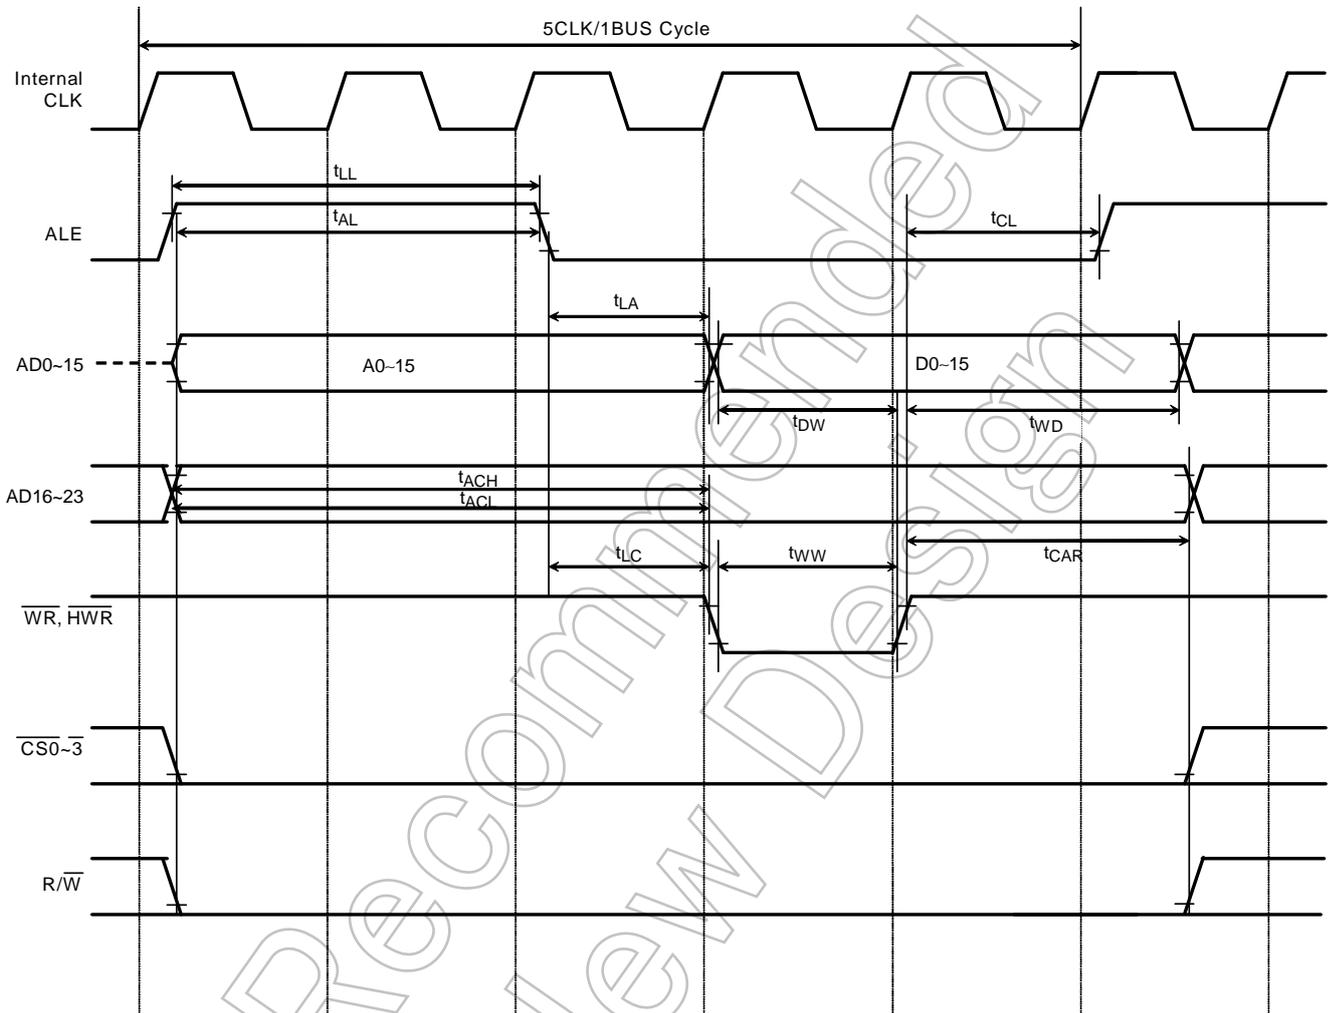


Not Recommended for New Design

(7) Write timing (ALE = 1 clock cycle, 2 programmed wait state)

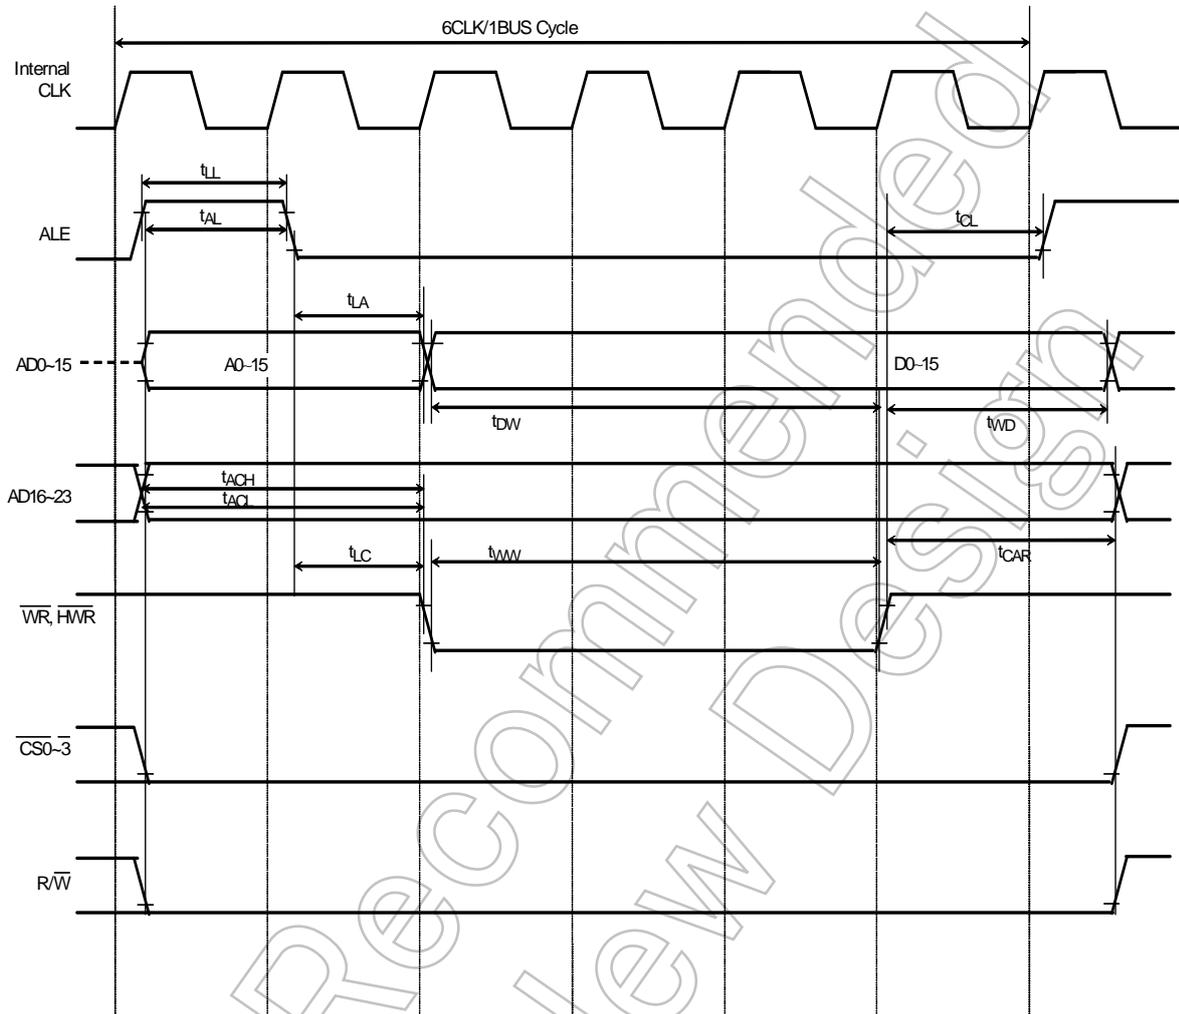

Not Recommended for New Design

(8) Write timing (ALE = 2 clock cycle, 4 externally generated wait states (2+2N) with N=1)

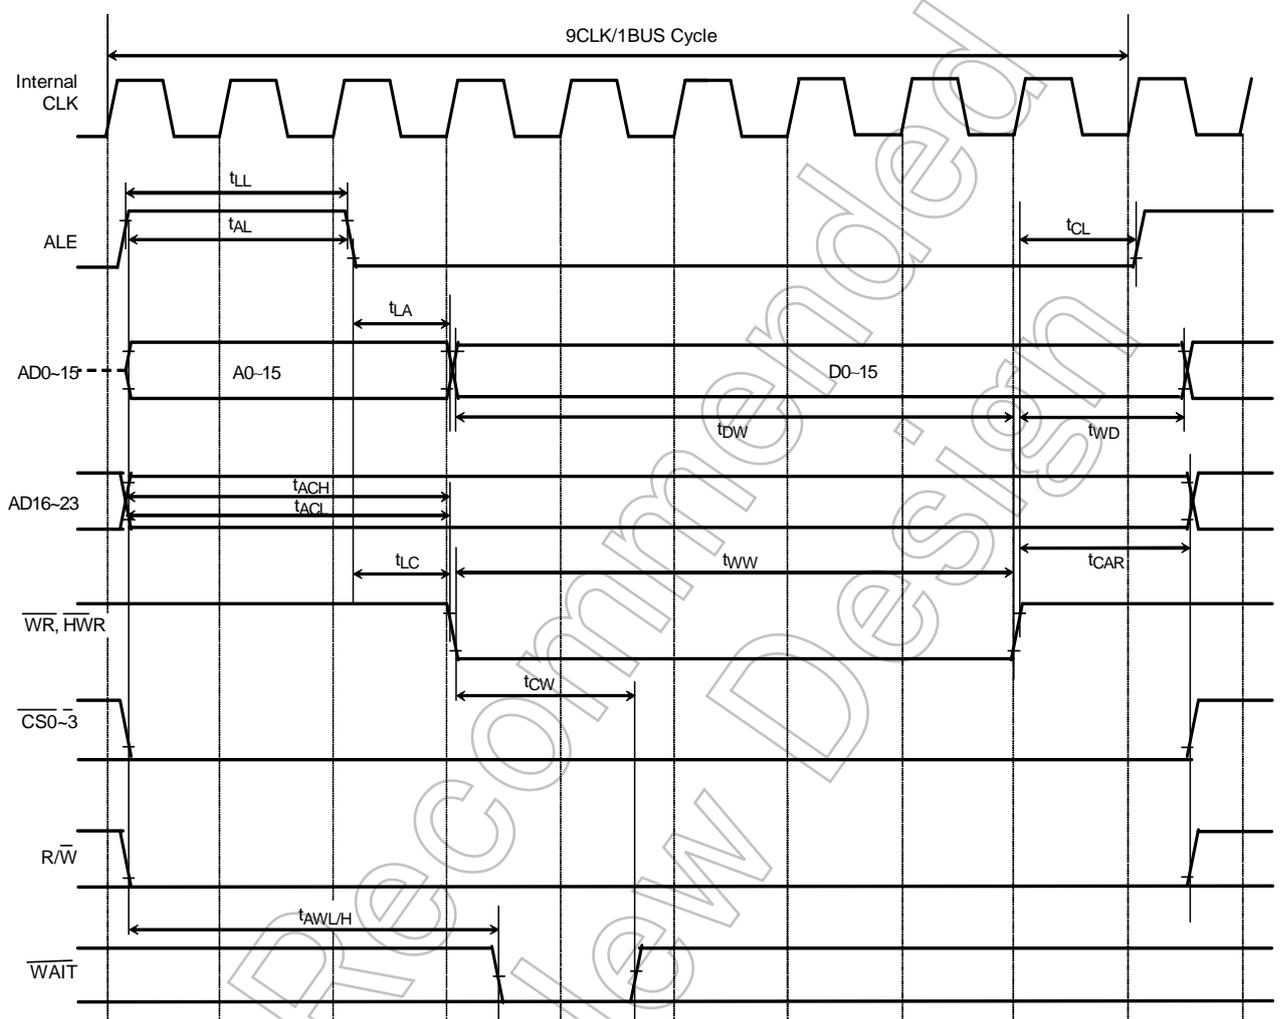


4.8 Transfer with DMA Request

The following shows an example of a transfer between the on-chip RAM and an external device in multiplex bus mode.

- 16-bit data bus width, non-recovery time
- Level data transfer mode
- Transfer size of 16 bits, device port size (DPS) of 16 bits
- Source/destination: on-chip RAM/external device

The following shows transfer operation timing of the on-chip RAM to an external bus during write operation (memory-to-memory transfer).

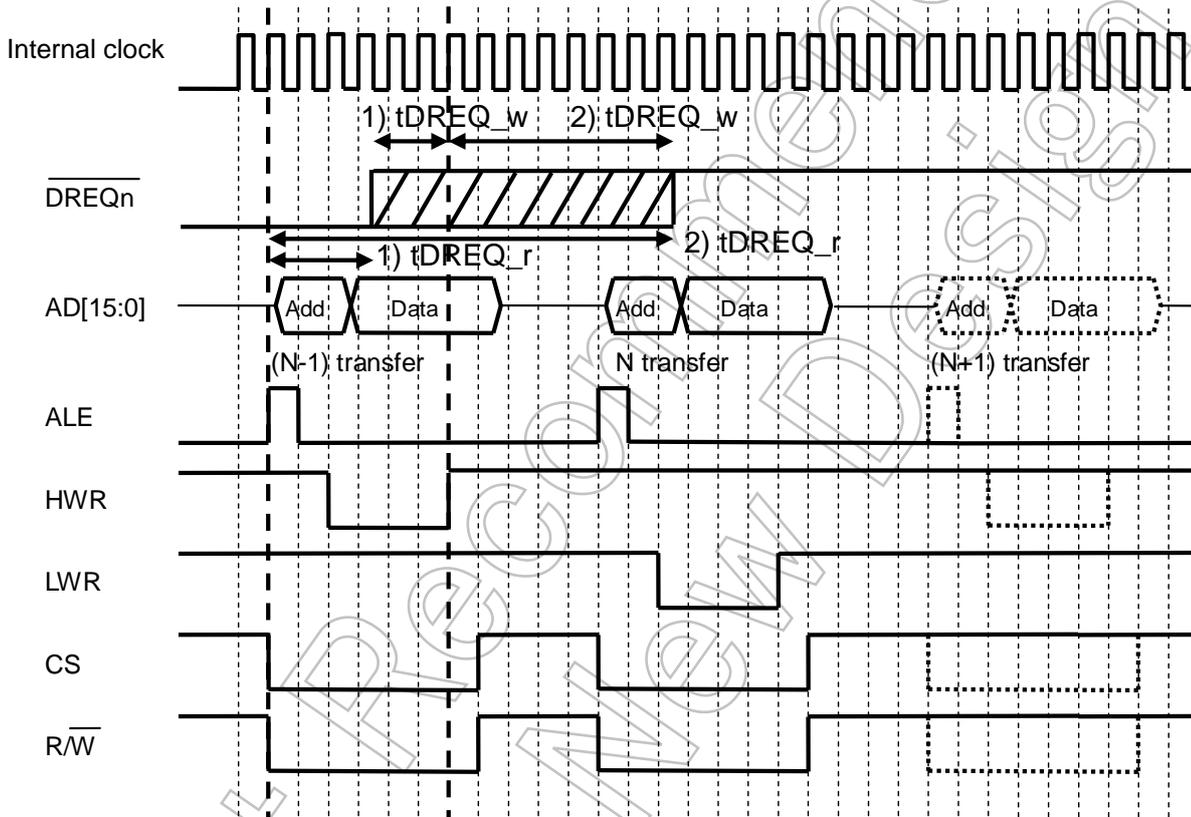

- 1) Indicates the condition under which Nth transfer is performed successfully.
- 2) Indicates the condition under which (N+1)th transfer is not performed.

(1) DVCC15=CVCC15=1.35V~1.65V, AVCC3m=2.7V~3.3V

DVCC33=2.3V~3.3V, DVCC30/31/32/34=1.65V~3.3V, Ta= -20~85°C (m=1~2)

No.	Parameter	Symbol	Equation		54 MHz (fsys)		Unit
			①Min	②Max	Min	Max	
2	\overline{RD} asserted to \overline{DREQn} negated (external device to on-chip RAM transfer)	tDREQ_r	$(W+1)x$	$(2W+ALE+8)x-5$ 1	37	152.5	ns
3	$\overline{WR} / \overline{HWR}$ rising to \overline{DREQn} negated (on-chip RAM to external device transfer)	tDREQ_w	$-(W+2)x$	$(5+WAIT)x-51.8$	-55.5	59.2	ns

(2) DVCC15=CVCC15=1.35V~1.65V, AVCC3m =2.7V~3.3V

DVCC33=1.65V~1.95V, DVCC30/31/32/34=1.65V~3.3V, Ta=-20~85°C (m=1~2)

No.	Parameter	Symbol	Equation		54 MHz (fsys)		Unit
			①Min	②Max	Min	Max	
2	\overline{RD} asserted to \overline{DREQn} negated (external device to on-chip RAM transfer)	tDREQ_r	$(W+1)x$	$(2W+ALE+8)x-5$ 6	37	147.5	ns
3	$\overline{WR} / \overline{HWR}$ rising to \overline{DREQn} negated (on-chip RAM to external device transfer)	tDREQ_w	$-(W+2)x$	$(5+WAIT)x-56.8$	-55.5	54.2	ns

W: number of wait

Ex.)

2 External wait +2N wait (N=1)

W=4

ALE: 1 is substituted for it at 1 clock cycle. 2 is substituted for it at 2 clock cycles.

The equations shown in the above table are calculated provided W=1 and ALE=1.

4.9 Serial Channel Timing

(1) I/O Interface mode (DVCC3=1.65V~3.3V)

In the table below, the letter x represents the fsys cycle period, which varies depending on the programming of the clock gear function.


① SCLK input mode (SIO0~SIO6)

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
SCLK period	t _{SCY}	12x		222		ns
TxD data to SCLK rise or fall*	t _{OSS}	2x-35		2		ns
TxD data hold after SCLK rise or fall*	t _{OHS}	8x-15		133		ns
RxD data valid to SCLK rise or fall*	t _{SRD}	30		30		ns
RxD data hold after SCLK rise or fall*	t _{HSR}	2x+29		66		ns

*SCLK rise or fall: Measured relative to the programmed active edge of SCLK.

② SCLK output mode (SIO0~SIO6)

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
SCLK period (programmable)	t _{SCY}	8x		222		ns
TxD data to SCLK rise	t _{OSS}	4x-14		60		ns
TxD data hold after SCLK rise	t _{OHS}	4x-14		60		ns
RxD data valid to SCLK rise	t _{SRD}	45		45		ns
RxD data hold after SCLK rise	t _{HSR}	0		0		ns

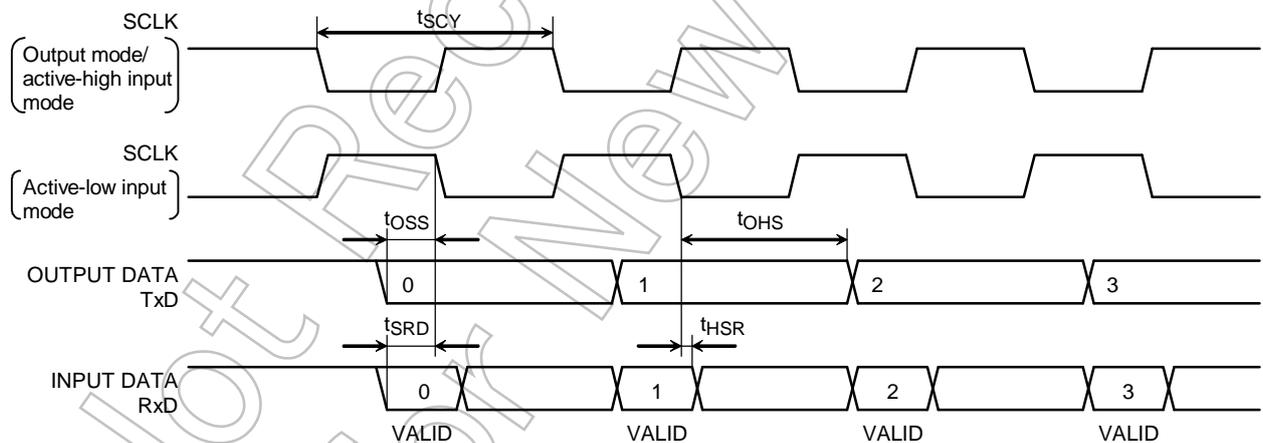

4.10 SBI Timing

(1) I2C mode

In the table below, the letters x and t represent the fsys periods and φT0 respectively.

n denotes the value of n programmed into the SCK (SCL output frequency select) field in the SBI0CR1.

Parameter	Symbol	Equation		Standard mode fsys = 8 MHz n = 4		Fast mode fsys = 32 MHz n = 4		Unit
		Min	Max	Min	Max	Min	Max	
SCL clock frequency	tSCL	0		0	100	0	400	kHz
Hold time for START condition	tHD:STA			4.0		0.6		μs
SCL clock low width (Input) (Note 1)	tLOW			4.7		1.3		μs
SCL clock high width (Input) (Note 2)	tHIGH			4.0		0.6		μs
Setup time for a repeated START condition	tSU:STA	(Note 5)		4.7		0.6		μs
Data hold time (Input) (Note 3, 4)	tHD:DAT			0.0		0.0		μs
Data setup time	tSU:DAT			250		100		ns
Setup time for STOP condition	tSU:STO			4.0		0.6		μs
Bus free time between STOP and START conditions	tBUF	(Note 5)		4.7		1.3		μs

Note 1) SCL clock low width (output) is calculated with: $(2^{(n-1)}+4) T$.

Normal mode: 6μsec@Typ(fsyst=8MHz, n=4)

Fast mode: 1.5μsec@Typ(fsyst=32MHz, n=4)

Note 2) SCL high width (output) is calculated with: $(2^{(n-1)}) T$.


Normal mode: 4μsec@Typ(fsyst=8MHz, n=4)

Fast mode: 1μsec@Typ(fsyst=32MHz, n=4)

Note 3) The output data hold time is equal to 12x

Note 4) The Philips I²C-bus specification states that a device must internally provide a hold time of at least 300 ns for the SDA signal to bridge the undefined region of the fall edge of SCL. However, this SBI does not satisfy this requirement. Also, the output buffer for SCL does not incorporate slope control of the falling edges; therefore, the equipment manufacturer should design it to satisfy the input data hold time shown in the table, including tr/tf of the SCL and SDA lines.

Note 5) Software-dependent

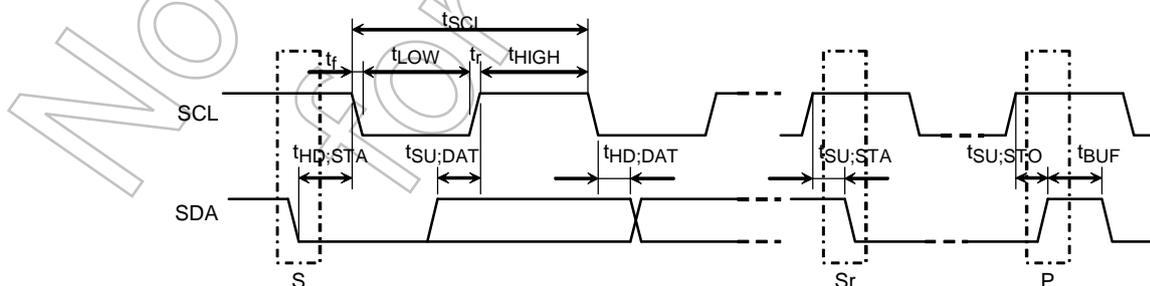

S: START condition
 Sr: Repeated START condition
 P: STOP condition

Fast mode: fsys ≥ 20 MHz

Standard mode: fsys ≥ 4 MHz

(2) Clock-Synchronous 8-Bit SIO mode

In the table below, the letters x and t represent the f_{sys} periods and ϕT_0 respectively.

The letter n denotes the value of n programmed into the SCK (SCL output frequency select) field in the SBI0CR1.


The electrical specifications below are for an SCLK signal with a 50% duty cycle.

③ SCK input mode

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
SCK period	t_{SCY}	$16x$		296		ns
TxD data to SCK rise	t_{OSS}	$(t_{SCY}/2)-(6x + 20)$		17		ns
TxD data hold after SCK rise	t_{OHS}	$(t_{SCY}/2)+4x$		222		ns
RxD data valid to SCK rise	t_{SRD}	0		0		ns
RxD data hold after SCK rise	t_{HSR}	$4x+10$		84		ns

④ SCK output mode

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
SCK period (programmable)	t_{SCY}	$16x$		296		ns
TxD data to SCK rise	t_{OSS}	$(t_{SCY}/2)-20$		128		ns
TxD data hold after SCK rise	t_{OHS}	$(t_{SCY}/2)-20$		128		ns
RxD data valid to SCK rise	t_{SRD}	$2x+30$		67		ns
RxD data hold after SCK rise	t_{HSR}	0		0		ns

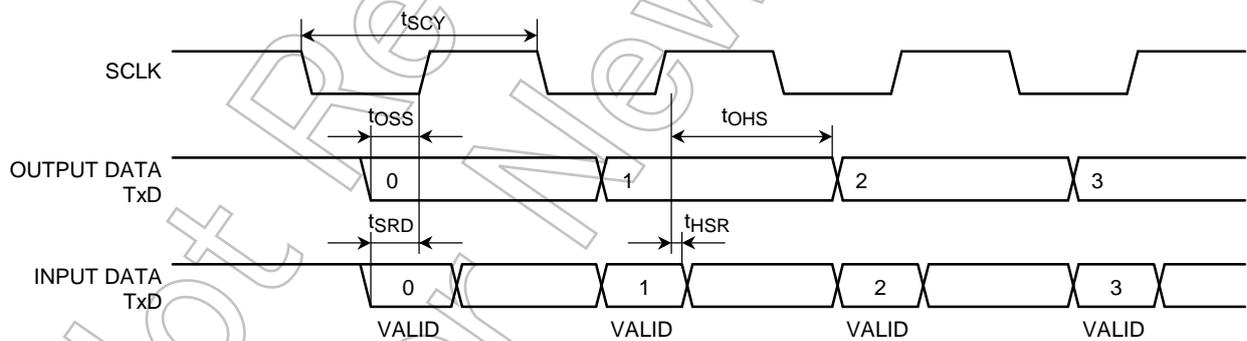

4.11 Event Counter

In the table below, the letter x represents the fsys cycle period.

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Clock low pulse width	tVCKL	2X+100		137		ns
Clock high pulse width	tVCKH	2X+100		137		ns

4.12 Capture

In the table below, the letter x represents the fsys cycle period.

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Low pulse width	tCPL	2X+100		137		ns
High pulse width	tCPH	2X+100		137		ns

4.13 General Interrupt (INTC)

In the table below, the letter x represents the fsys cycle period.

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Low pulse width for INTO-INTA	tINTAL	X+100		118.5		ns
High pulse width for INTO-INTA	tINTAH	X+100		118.5		ns


4.14 NMI/STOP Release Interrupt

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Low pulse width for NMI and INTO-INT4	tINTBL	100		100		ns
High pulse width for INTO-INT4	tINTBH	100		100		ns


4.15 SCOUT Pin

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Clock high pulse width	tSCH	0.5T-5		4.3		ns
Clock low pulse width	tSCL	0.5T-5		4.3		ns

Note: In the above table, the letter T represents the cycle period of the SCOUT output clock.

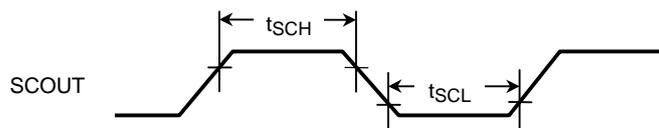

4.16 Bus Request and Bus Acknowledge Signals

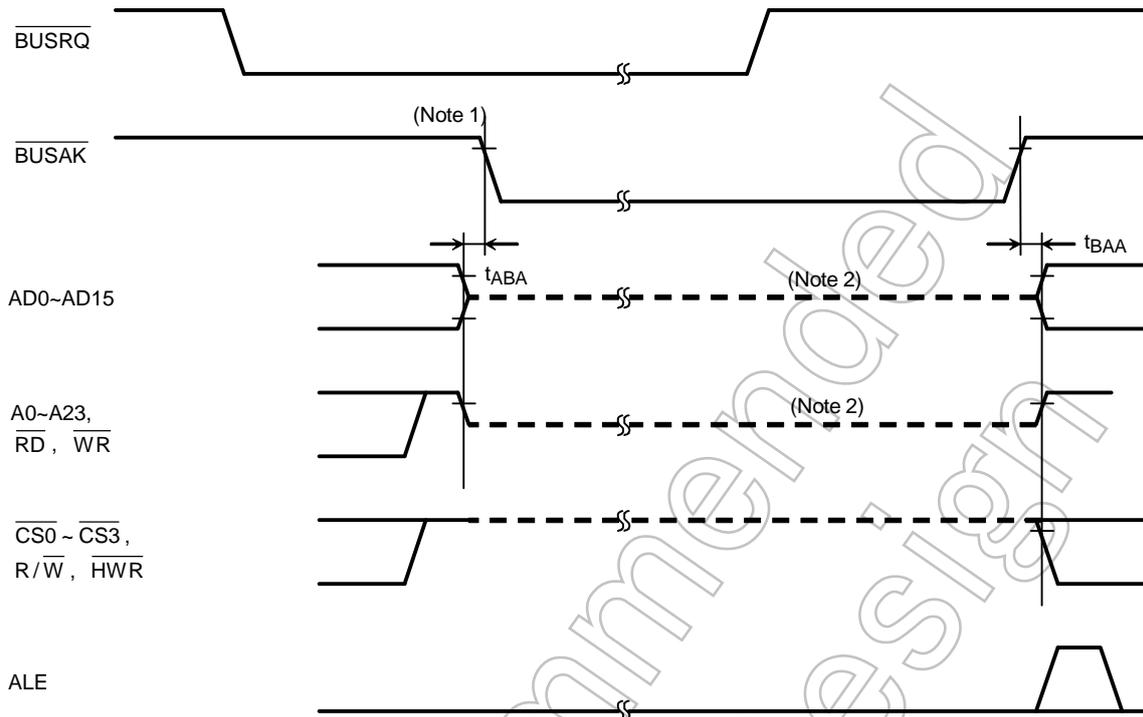

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Bus float to $\overline{\text{BUSAK}}$ fall	t_{ABA}	0	80	0	80	ns
Bus float to $\overline{\text{BUSAK}}$ rise	t_{BAA}	0	80	0	80	ns

(Note 1) If the current bus cycle has not terminated due to wait-state insertion, the TMP19A63 does not respond to $\overline{\text{BUSRQ}}$ low until the wait state ends.

(Note 2) This broken line indicates that output buffers are disabled, not that the signals are at indeterminate states. The pin holds the last logic value present at that pin before the bus is relinquished. This is dynamically accomplished through external load capacitances. In case of using the external load capacitance to maintain the bus at a predefined state, the equipment manufacturer needs to consider the additional time (determined by the CR constant) required for the signal transmission through the external load capacitances. The on-chip, integrated programmable pullup/pulldown resistors remain active, depending on internal signal states.

4.17 KWUP Input

With Pull up

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Low pulse width for KEY0~D	tky _{TBL}	X+100		118		ns
High pulse width for KEY0~D	tky _{TBH}	X+100		118		ns

Without pull up

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Low pulse width for KEY0~D	tky _{TBL}	100		100		ns

4.18 Dual Pulse Input

Parameter	Symbol	Equation		54 MHz		Unit
		Min	Max	Min	Max	
Dual input pulse period	Tdcyc	8Y		296		ns
Dual input pulse setup	Tab _s	Y+20		57		ns
Dual input pulse hold	Tab _h	Y+20		57		ns

Y: fsys/2

