


TAR5SB15 to TAR5SB50

Point Regulators (Low-Dropout Regulator)

The TAR5SBxx Series is comprised of general-purpose bipolar single-power-supply devices incorporating a control pin which can be used to turn them ON/OFF.

Overtemperature and overcurrent protection circuits are built-in to the devices' output circuit.

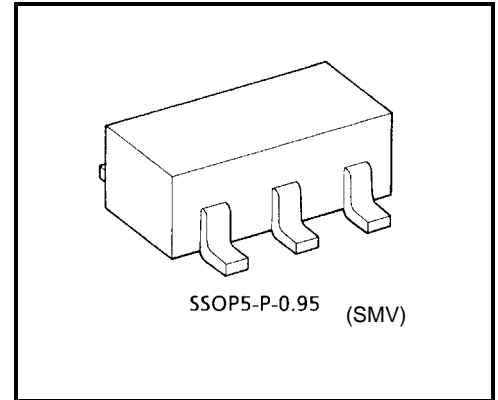


Weight: 0.014 g (typ.)

1. Features

- Low stand-by current
- Overtemperature/overcurrent protection
- Operation voltage range is wide.
- Maximum output current is high.
- Difference between input voltage and output voltage is low.
- Small package: SMV (SOT-25) (SC-74A)
- Ceramic capacitors can be used.

2. Pin Assignments (top view)



Overtemperature protection and overcurrent protection functions are not necessary guarantee of operating ratings below the absolute maximum ratings.

Do not use devices under conditions in which their absolute maximum ratings will be exceeded.


Start of commercial production
2002-09

3. List of Products Number and Marking

| Products No. | Marking | Products No. | Marking |
|--------------|---------|--------------|---------|
| TAR5SB15 | 1B5 | TAR5SB33 | 3B3 |
| TAR5SB16 | 1B6 | TAR5SB34 | 3B4 |
| TAR5SB17 | 1B7 | TAR5SB35 | 3B5 |
| TAR5SB18 | 1B8 | TAR5SB36 | 3B6 |
| TAR5SB19 | 1B9 | TAR5SB37 | 3B7 |
| TAR5SB20 | 2B0 | TAR5SB38 | 3B8 |
| TAR5SB21 | 2B1 | TAR5SB39 | 3B9 |
| TAR5SB22 | 2B2 | TAR5SB40 | 4B0 |
| TAR5SB23 | 2B3 | TAR5SB41 | 4B1 |
| TAR5SB24 | 2B4 | TAR5SB42 | 4B2 |
| TAR5SB25 | 2B5 | TAR5SB43 | 4B3 |
| TAR5SB26 | 2B6 | TAR5SB44 | 4B4 |
| TAR5SB27 | 2B7 | TAR5SB45 | 4B5 |
| TAR5SB28 | 2B8 | TAR5SB46 | 4B6 |
| TAR5SB29 | 2B9 | TAR5SB47 | 4B7 |
| TAR5SB30 | 3B0 | TAR5SB48 | 4B8 |
| TAR5SB31 | 3B1 | TAR5SB49 | 4B9 |
| TAR5SB32 | 3B2 | TAR5SB50 | 5B0 |

Marking on the Product

Example: TAR5SB30 (3.0 V output)



4. Absolute Maximum Ratings (Note) (Ta = 25°C)

| Characteristics | Symbol | Rating | Unit |
|-----------------------------|-----------|--------------|------|
| Supply voltage | V_{IN} | 15 | V |
| Output current | I_{OUT} | 200 | mA |
| Power dissipation | P_D | 200 (Note 1) | mW |
| | | 380 (Note 2) | |
| Operation temperature range | T_{opr} | -40 to 85 | °C |
| Storage temperature range | T_{stg} | -55 to 150 | °C |

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Unit Rating

Note 2: Mounted on a glass epoxy circuit board of 30 × 30 mm. Pad dimension of 50 mm²

TAR5SB15 to TAR5SB22

5. Electrical Characteristic (Unless otherwise specified, $V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 50\text{ mA}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 10\text{ }\mu\text{F}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $T_j = 25^\circ\text{C}$)

| Characteristics | Symbol | Test Condition | Min | Typ. | Max | Unit |
|-------------------------|----------------|---|-----|------|----------|-----------------------|
| Output voltage | V_{OUT} | Please refer to the Output Voltage Accuracy table. | | | | |
| Line regulation | Reg·line | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 15\text{ V}$, $I_{OUT} = 1\text{ mA}$ | — | 3 | 15 | mV |
| Load regulation | Reg·load | $1\text{ mA} \leq I_{OUT} \leq 150\text{ mA}$ | — | 25 | 75 | mV |
| Quiescent current | I_{B1} | $I_{OUT} = 0\text{ mA}$ | — | 170 | — | μA |
| | I_{B2} | $I_{OUT} = 50\text{ mA}$ | — | 550 | 850 | |
| Stand-by current | I_B (OFF) | $V_{CT} = 0\text{ V}$ | — | — | 0.1 | μA |
| Output noise voltage | V_{NO} | $V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 10\text{ mA}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $T_a = 25^\circ\text{C}$ | — | 30 | — | μV_{rms} |
| Temperature coefficient | T_{CVO} | $-40^\circ\text{C} \leq T_{opr} \leq 85^\circ\text{C}$ | — | 100 | — | ppm/ $^\circ\text{C}$ |
| Input voltage | V_{IN} | — | 2.4 | — | 15 | V |
| Ripple rejection | R.R. | $V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 10\text{ mA}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $f = 1\text{ kHz}$, $V_{Ripple} = 500\text{ mV}_{p-p}$, $T_a = 25^\circ\text{C}$ | — | 70 | — | dB |
| Control voltage (ON) | V_{CT} (ON) | — | 1.5 | — | V_{IN} | V |
| Control voltage (OFF) | V_{CT} (OFF) | — | — | — | 0.4 | V |
| Control current (ON) | I_{CT} (ON) | $V_{CT} = 1.5\text{ V}$ | — | 3 | 10 | μA |
| Control current (OFF) | I_{CT} (OFF) | $V_{CT} = 0\text{ V}$ | — | 0 | 0.1 | μA |

TAR5SB23 to TAR5SB50

Electrical Characteristic (Unless otherwise specified, $V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 50\text{ mA}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 10\text{ }\mu\text{F}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $T_j = 25^\circ\text{C}$)

| Characteristics | Symbol | Test Condition | Min | Typ. | Max | Unit |
|-------------------------|--------------------|---|--------------------------|------|----------|-----------------------|
| Output voltage | V_{OUT} | Please refer to the Output Voltage Accuracy table. | | | | |
| Line regulation | Reg·line | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 15\text{ V}$, $I_{OUT} = 1\text{ mA}$ | — | 3 | 15 | mV |
| Load regulation | Reg·load | $1\text{ mA} \leq I_{OUT} \leq 150\text{ mA}$ | — | 25 | 75 | mV |
| Quiescent current | I_{B1} | $I_{OUT} = 0\text{ mA}$ | — | 170 | — | μA |
| | I_{B2} | $I_{OUT} = 50\text{ mA}$ | — | 550 | 850 | |
| Stand-by current | I_B (OFF) | $V_{CT} = 0\text{ V}$ | — | — | 0.1 | μA |
| Output noise voltage | V_{NO} | $V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 10\text{ mA}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $T_a = 25^\circ\text{C}$ | — | 30 | — | μV_{rms} |
| Dropout voltage | $V_{IN} - V_{OUT}$ | $I_{OUT} = 50\text{ mA}$ | — | 130 | 200 | mV |
| Temperature coefficient | T_{CVO} | $-40^\circ\text{C} \leq T_{opr} \leq 85^\circ\text{C}$ | — | 100 | — | ppm/ $^\circ\text{C}$ |
| Input voltage | V_{IN} | — | $V_{OUT} + 0.2\text{ V}$ | — | 15 | V |
| Ripple rejection | R.R. | $V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 10\text{ mA}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $f = 1\text{ kHz}$, $V_{Ripple} = 500\text{ mV}_{p-p}$, $T_a = 25^\circ\text{C}$ | — | 70 | — | dB |
| Control voltage (ON) | V_{CT} (ON) | — | 1.5 | — | V_{IN} | V |
| Control voltage (OFF) | V_{CT} (OFF) | — | — | — | 0.4 | V |
| Control current (ON) | I_{CT} (ON) | $V_{CT} = 1.5\text{ V}$ | — | 3 | 10 | μA |
| Control current (OFF) | I_{CT} (OFF) | $V_{CT} = 0\text{ V}$ | — | 0 | 0.1 | μA |


6. Output Voltage Accuracy

($V_{IN} = V_{OUT} + 1\text{ V}$, $I_{OUT} = 50\text{ mA}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 10\text{ }\mu\text{F}$, $C_{NOISE} = 0.01\text{ }\mu\text{F}$, $T_j = 25^\circ\text{C}$)

| Product No. | Symbol | Min | Typ. | Max | Unit |
|-------------|------------------|------|------|------|------|
| TAR5SB15 | V _{OUT} | 1.44 | 1.5 | 1.56 | V |
| TAR5SB16 | | 1.54 | 1.6 | 1.66 | |
| TAR5SB17 | | 1.64 | 1.7 | 1.76 | |
| TAR5SB18 | | 1.74 | 1.8 | 1.86 | |
| TAR5SB19 | | 1.84 | 1.9 | 1.96 | |
| TAR5SB20 | | 1.94 | 2.0 | 2.06 | |
| TAR5SB21 | | 2.04 | 2.1 | 2.16 | |
| TAR5SB22 | | 2.14 | 2.2 | 2.26 | |
| TAR5SB23 | | 2.24 | 2.3 | 2.36 | |
| TAR5SB24 | | 2.34 | 2.4 | 2.46 | |
| TAR5SB25 | | 2.43 | 2.5 | 2.57 | |
| TAR5SB26 | | 2.53 | 2.6 | 2.67 | |
| TAR5SB27 | | 2.63 | 2.7 | 2.77 | |
| TAR5SB28 | | 2.73 | 2.8 | 2.87 | |
| TAR5SB29 | | 2.83 | 2.9 | 2.97 | |
| TAR5SB30 | | 2.92 | 3.0 | 3.08 | |
| TAR5SB31 | | 3.02 | 3.1 | 3.18 | |
| TAR5SB32 | | 3.12 | 3.2 | 3.28 | |
| TAR5SB33 | | 3.21 | 3.3 | 3.39 | |
| TAR5SB34 | | 3.31 | 3.4 | 3.49 | |
| TAR5SB35 | | 3.41 | 3.5 | 3.59 | |
| TAR5SB36 | | 3.51 | 3.6 | 3.69 | |
| TAR5SB37 | | 3.6 | 3.7 | 3.8 | |
| TAR5SB38 | | 3.7 | 3.8 | 3.9 | |
| TAR5SB39 | | 3.8 | 3.9 | 4.0 | |
| TAR5SB40 | | 3.9 | 4.0 | 4.1 | |
| TAR5SB41 | | 3.99 | 4.1 | 4.21 | |
| TAR5SB42 | | 4.09 | 4.2 | 4.31 | |
| TAR5SB43 | | 4.19 | 4.3 | 4.41 | |
| TAR5SB44 | | 4.29 | 4.4 | 4.51 | |
| TAR5SB45 | 4.38 | 4.5 | 4.62 | | |
| TAR5SB46 | 4.48 | 4.6 | 4.72 | | |
| TAR5SB47 | 4.58 | 4.7 | 4.82 | | |
| TAR5SB48 | 4.68 | 4.8 | 4.92 | | |
| TAR5SB49 | 4.77 | 4.9 | 5.03 | | |
| TAR5SB50 | 4.87 | 5.0 | 5.13 | | |

7. Application Note

1. Recommended Application Circuit

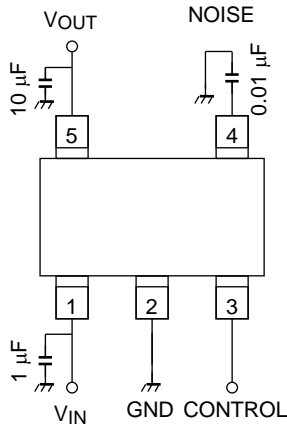

| Control Level | Operation |
|---------------|-----------|
| HIGH | ON |
| LOW | OFF |


The figure above shows the recommended configuration for using a point regulator. Insert a capacitor for stable input/output operation.

If the control function is not to be used, Toshiba recommend that the control pin (pin 1) be connected to the V_{CC} pin.

2. Power Dissipation

The power dissipation for board-mounted TAR5SBxx Series devices (rated at 380 mW) is measured using a board whose size and pattern are as shown below. When incorporating a device belonging to this series into your design, derate the power dissipation as far as possible by reducing the levels of parameters such as input voltage, output current and ambient temperature. Toshiba recommend that these devices should typically be derated to 70% to 80% of their absolute maximum power dissipation value.



Thermal Resistance Evaluation Board

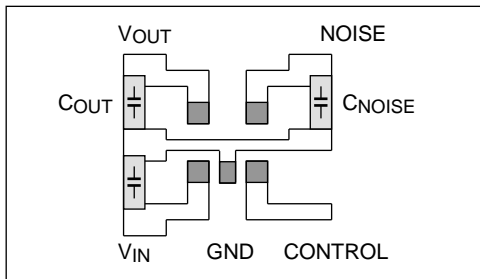

Circuit board material: glass epoxy,
 Circuit board dimension: 30 mm × 30 mm,
 Copper foil pad area: 50 mm² (t = 0.8 mm)

3. Ripple Rejection



The devices of the TAR5SBxx Series feature a circuit with an excellent ripple rejection characteristic. Because the circuit also features an excellent output fluctuation characteristic for sudden supply voltage drops, the circuit is ideal for use in the RF blocks incorporated in all mobile telephones.

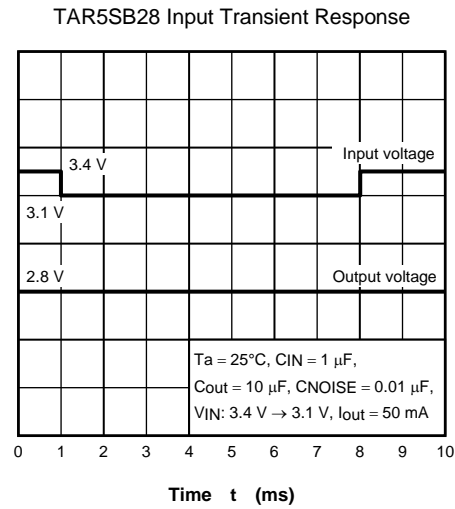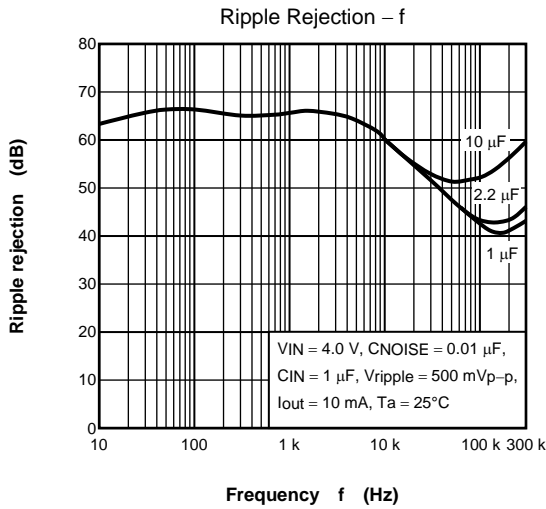

4. NOISE Pin

TAR5SBxx Series devices incorporate a NOISE pin to reduce output noise voltage. Inserting a capacitor between the NOISE pin and GND reduces output noise. To ensure stable operation, insert a capacitor of 0.0047 μF or more between the NOISE pin and GND.

The output voltage rise time varies according to the capacitance of the capacitor connected to the NOISE pin.

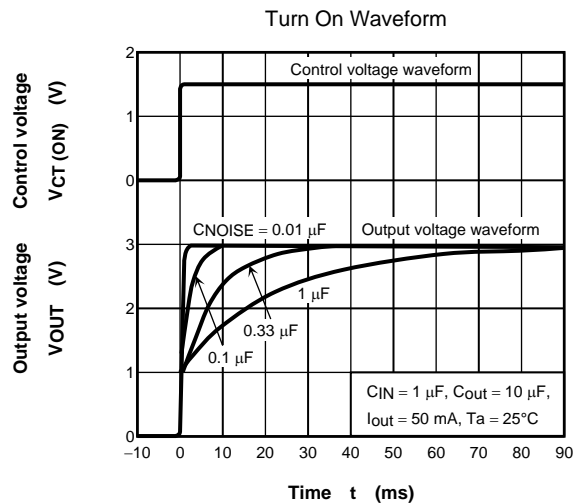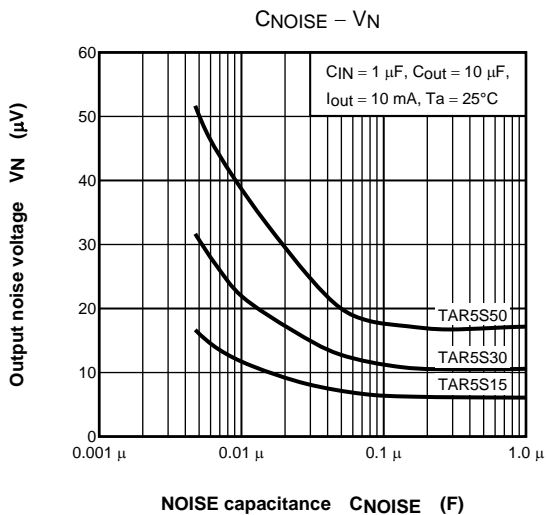




5. Example of Characteristics when Ceramic Capacitor is Used

Shown below is the stable operation area, where the output voltage does not oscillate, evaluated using a Toshiba evaluation circuit. The equivalent series resistance (ESR) of the output capacitor and output current determines this area. TAR5SBxx Series devices operate stably even when a ceramic capacitor is used as the output capacitor.


If a ceramic capacitor is used as the output capacitor and the ripple frequency is 30 kHz or more, the ripple rejection differs from that when a tantalum capacitor is used. This is shown below.

Toshiba recommend that users check that devices operate stably under the intended conditions of use.

Examples of safe operating area characteristics

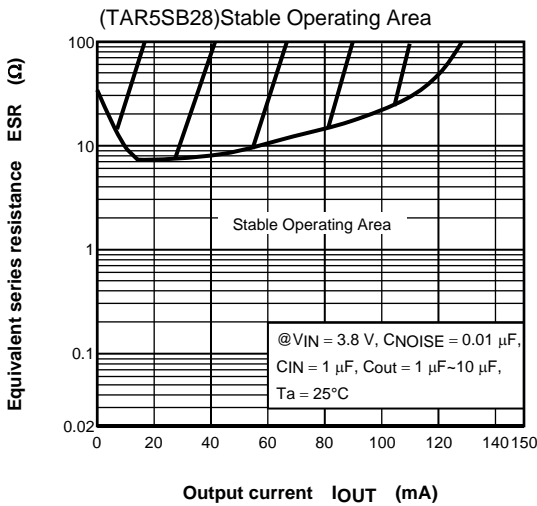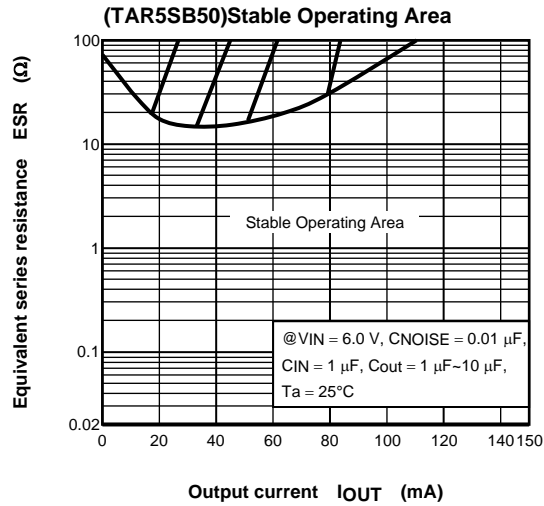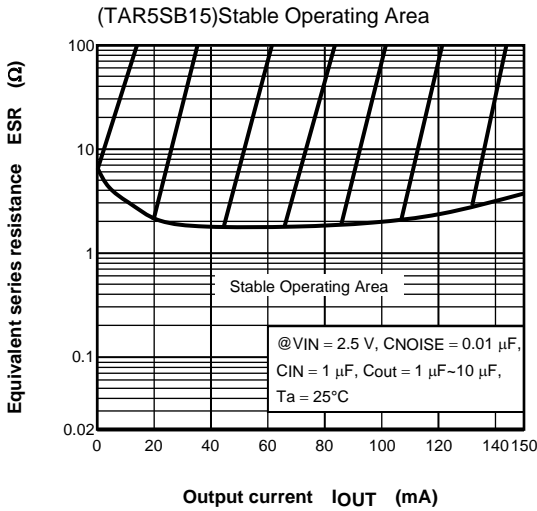








Evaluation Circuit for Stable Operating Area

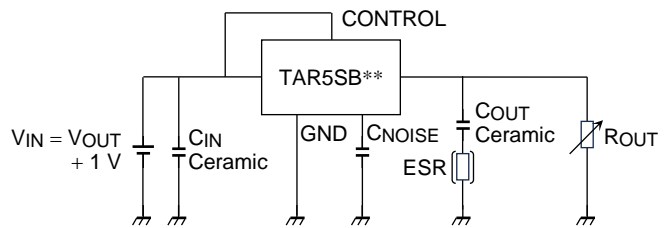


Capacitors used for evaluation
 Made by Murata CIN: GRM40B105K
 COUT: GRM40B105K/GRM40B106K

Ripple Rejection Characteristic (f = 10 kHz to 300 kHz)

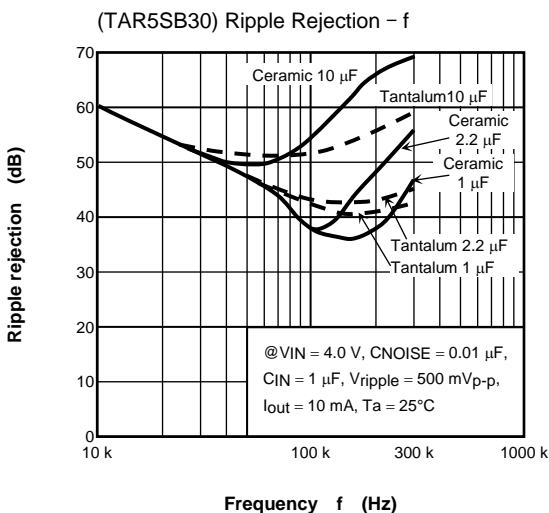


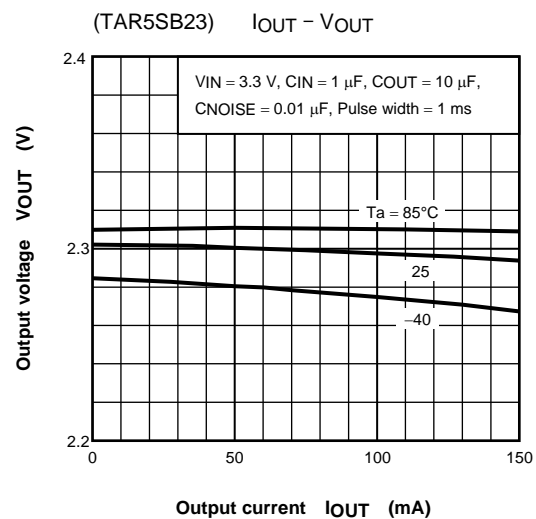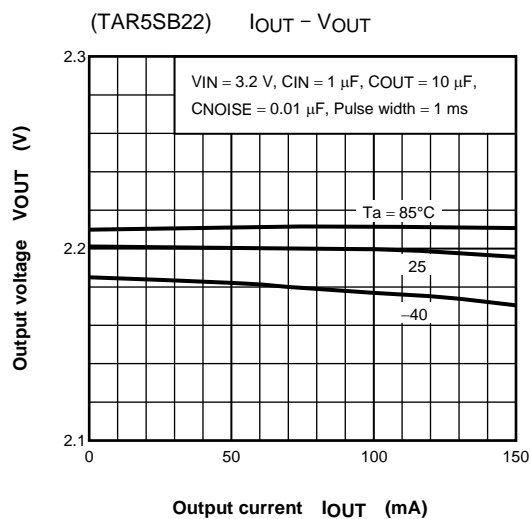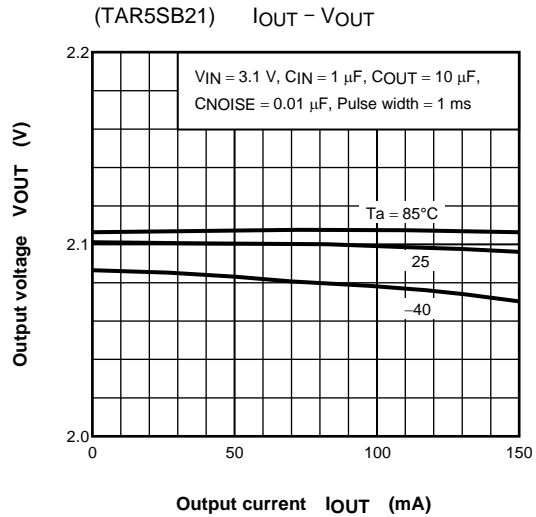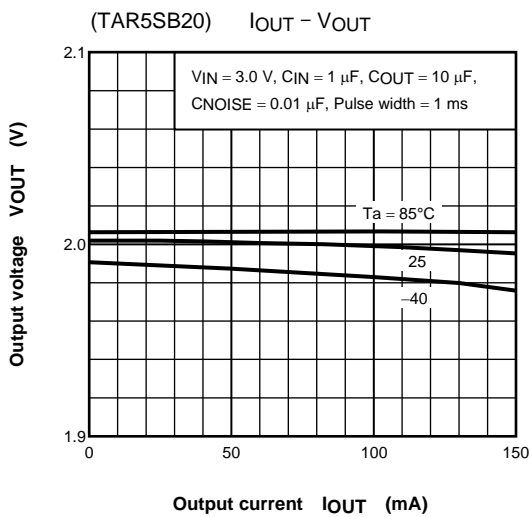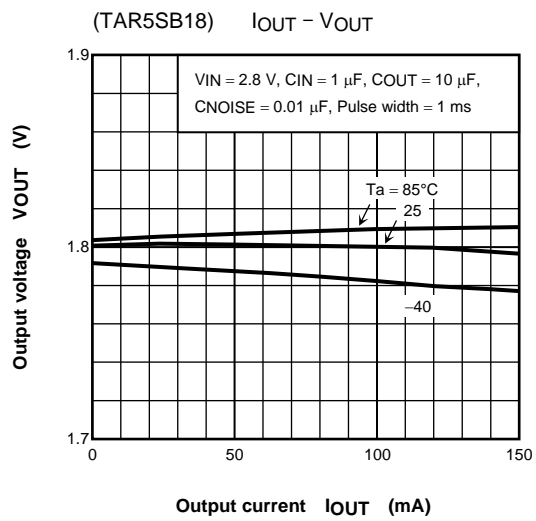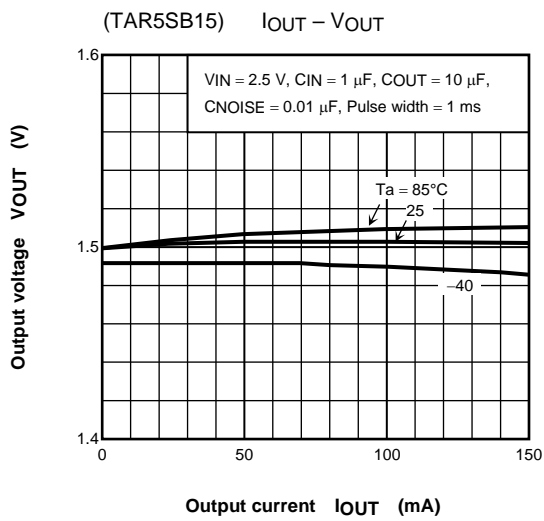


(TAR5SB25) $I_{OUT} - V_{OUT}$

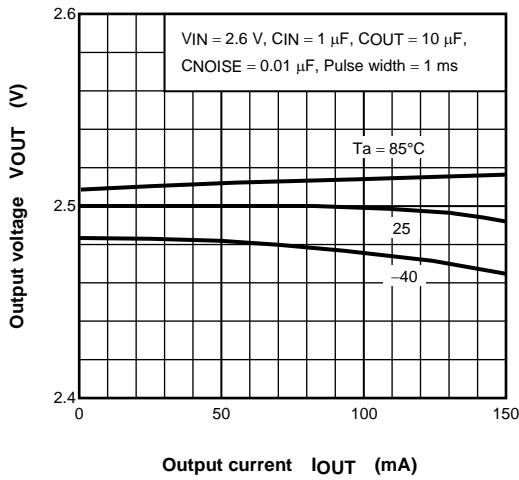


(TAR5SB27) $I_{OUT} - V_{OUT}$

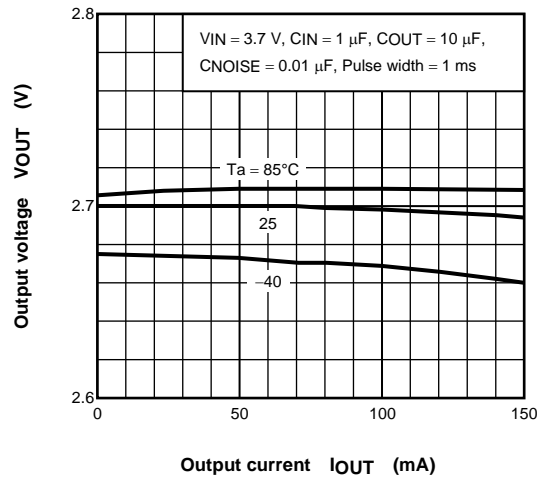


(TAR5SB28) $I_{OUT} - V_{OUT}$

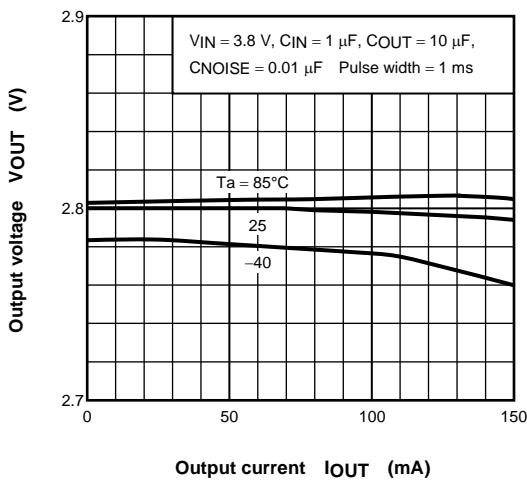


(TAR5SB29) $I_{OUT} - V_{OUT}$

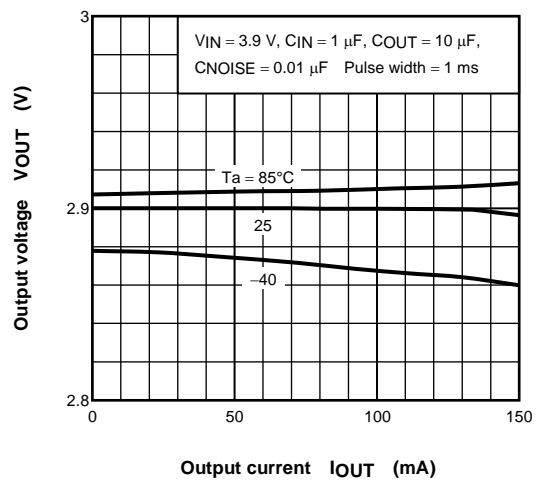


(TAR5SB30) $I_{OUT} - V_{OUT}$

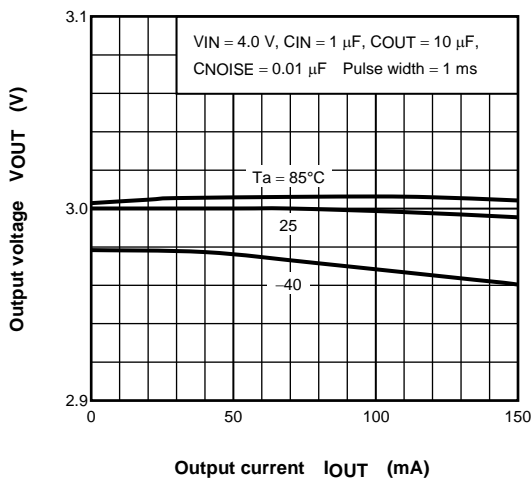


(TAR5SB31) $I_{OUT} - V_{OUT}$

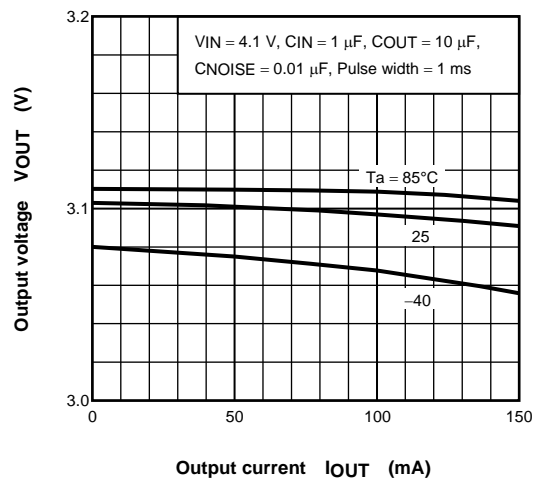


(TAR5SB32) I_{OUT} - V_{OUT}

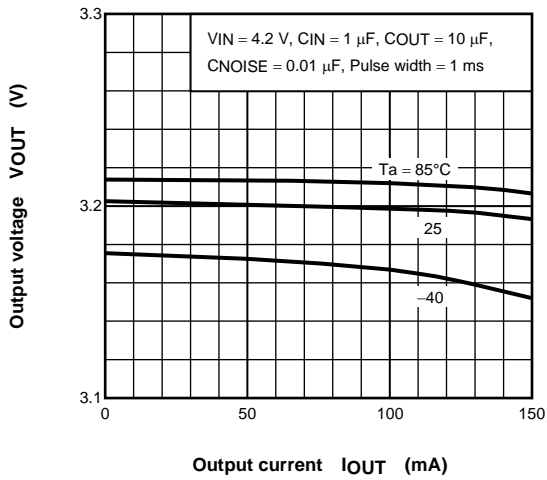


(TAR5SB33) I_{OUT} - V_{OUT}

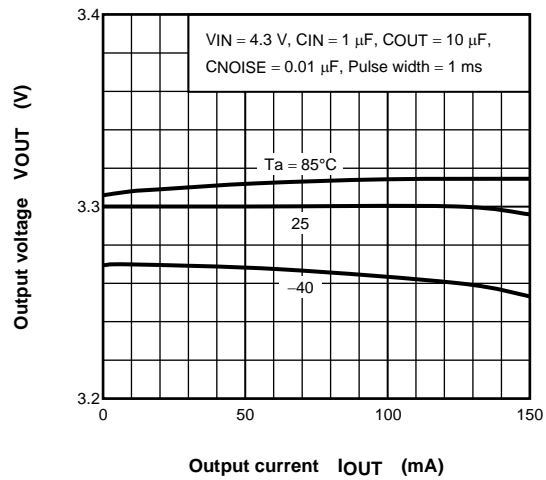


(TAR5SB35) I_{OUT} - V_{OUT}

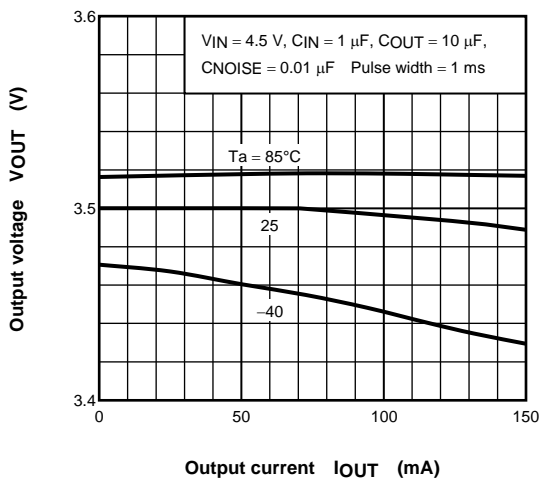


(TAR5SB45) I_{OUT} - V_{OUT}






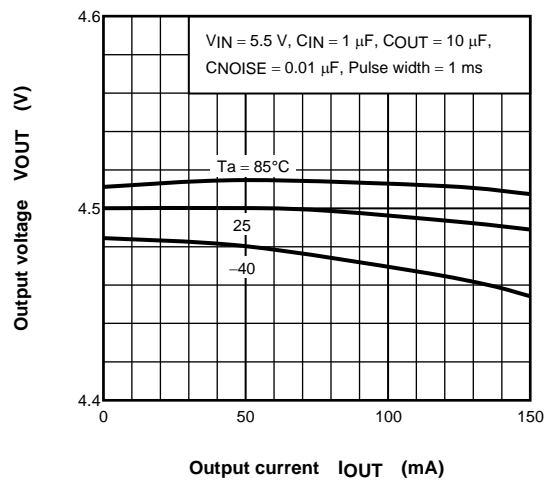








(TAR5SB48) I_{OUT} - V_{OUT}






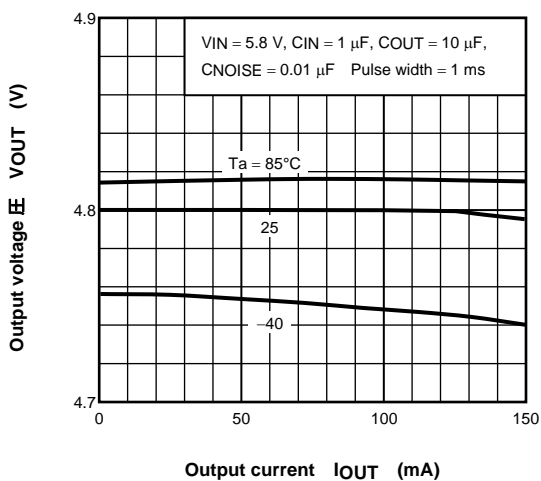


(TAR5SB50) I_{OUT} - V_{OUT}

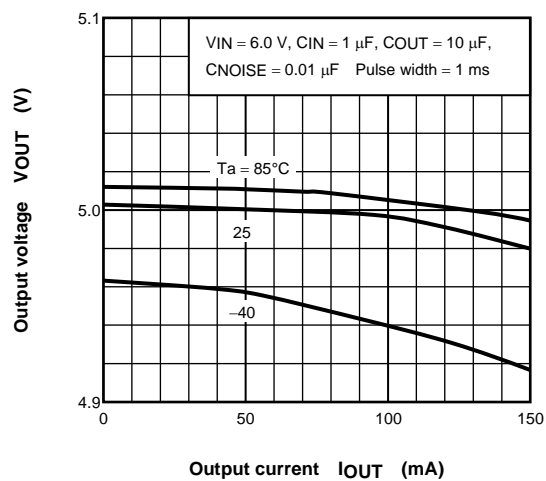


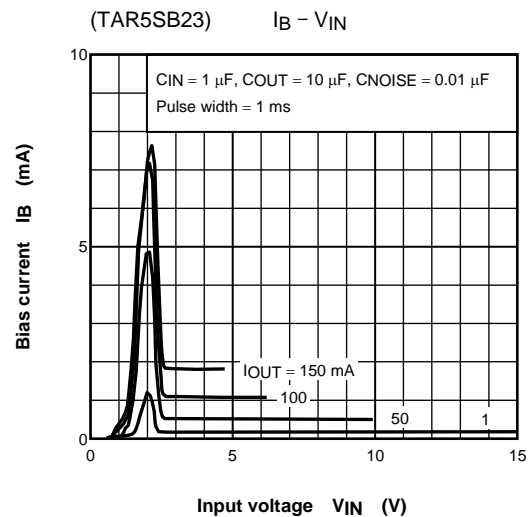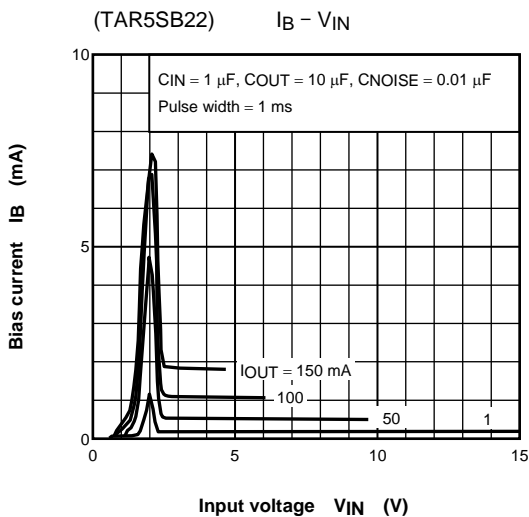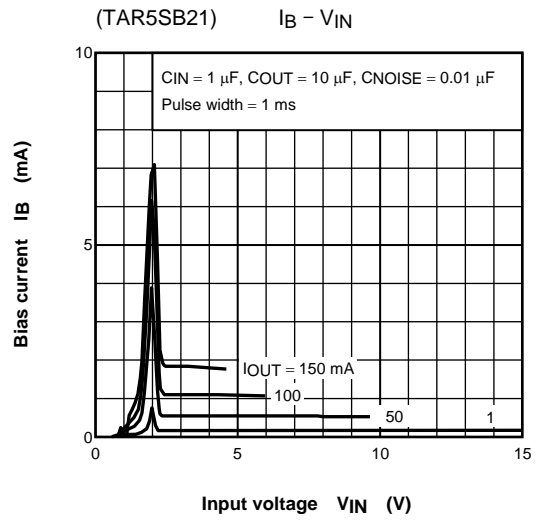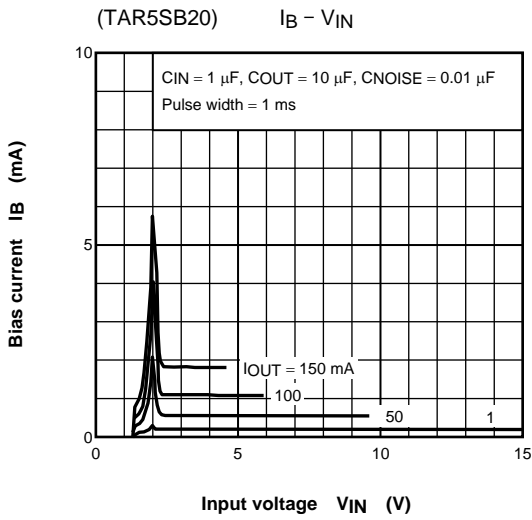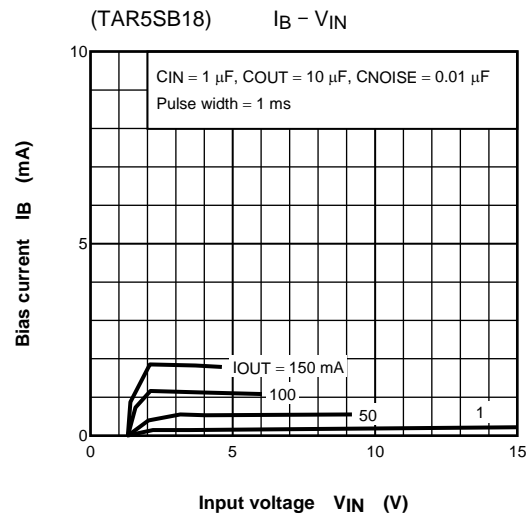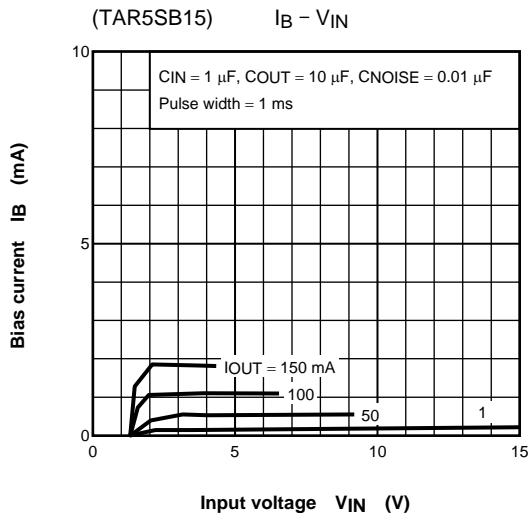

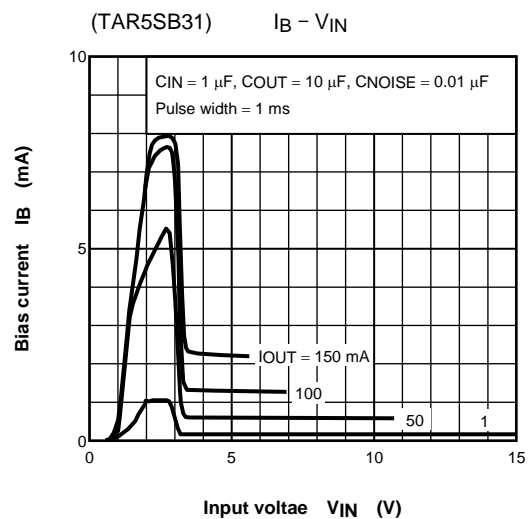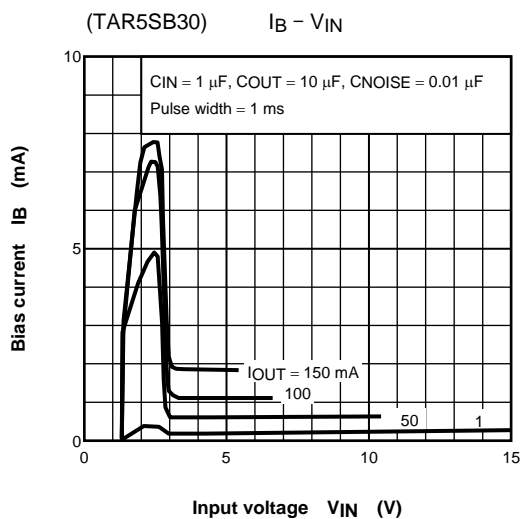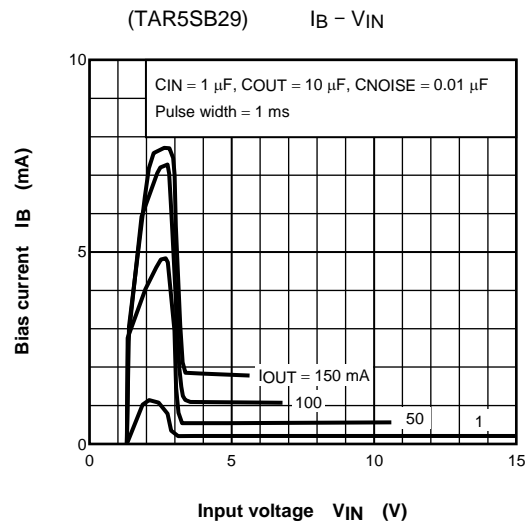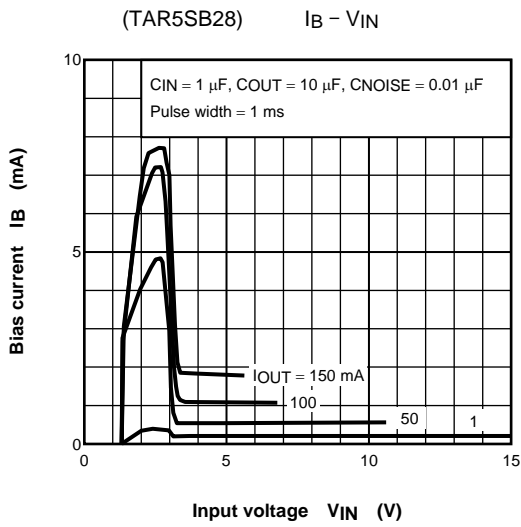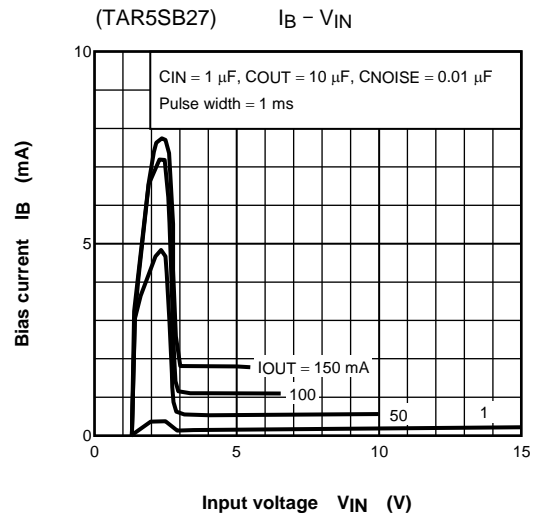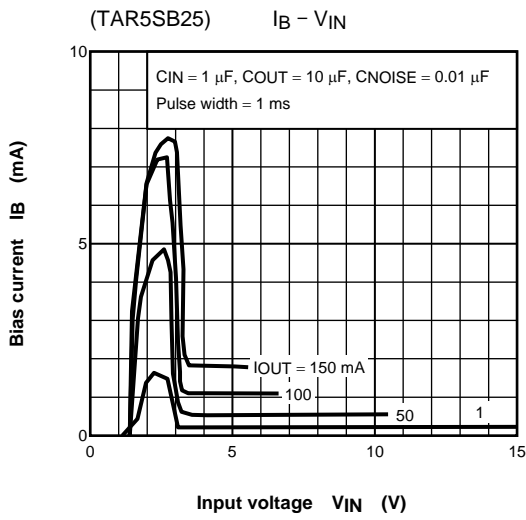


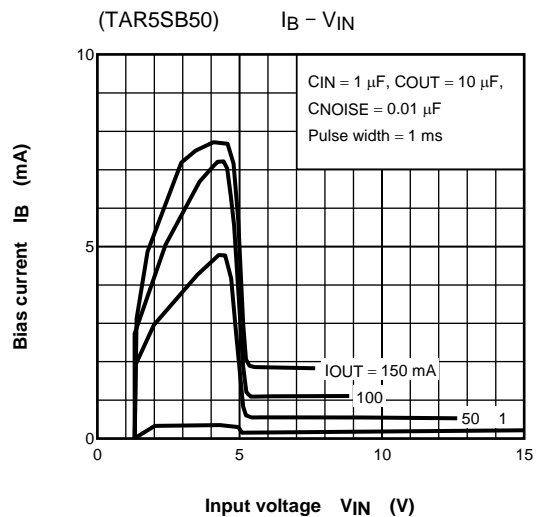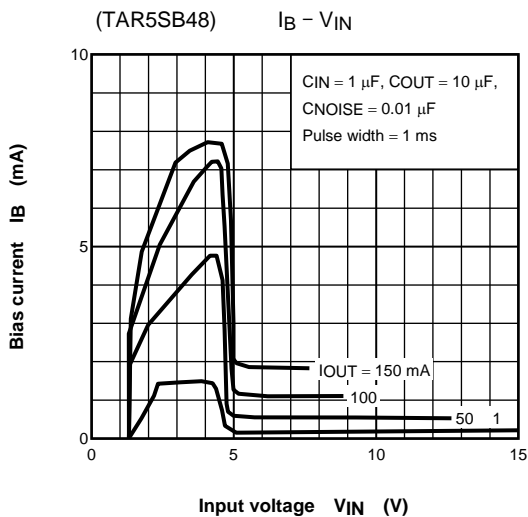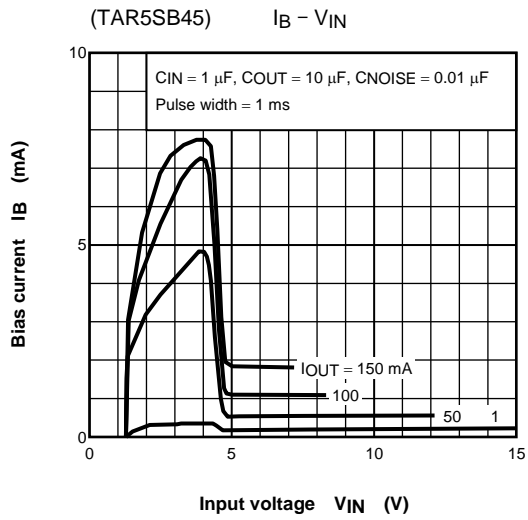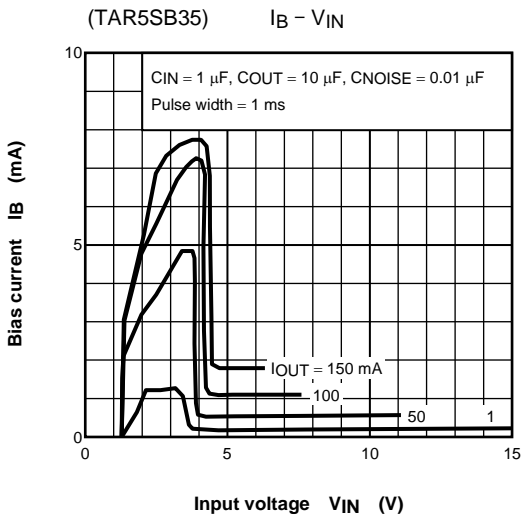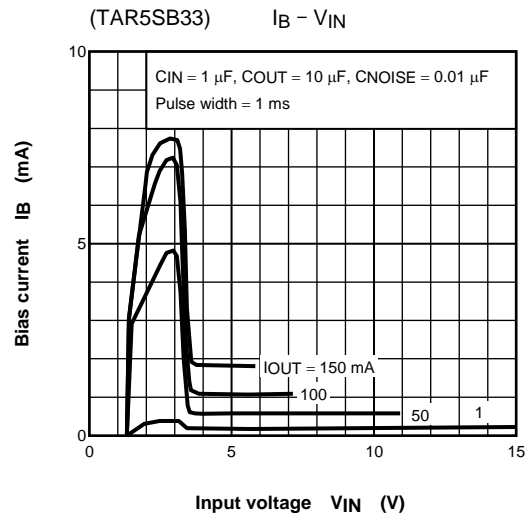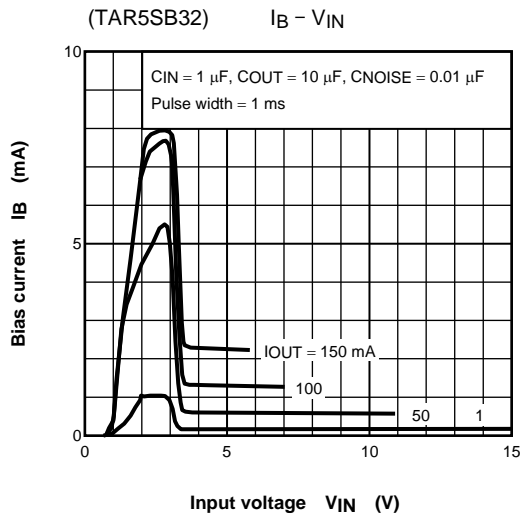


(TAR5SB15) $V_{OUT} - V_{IN}$

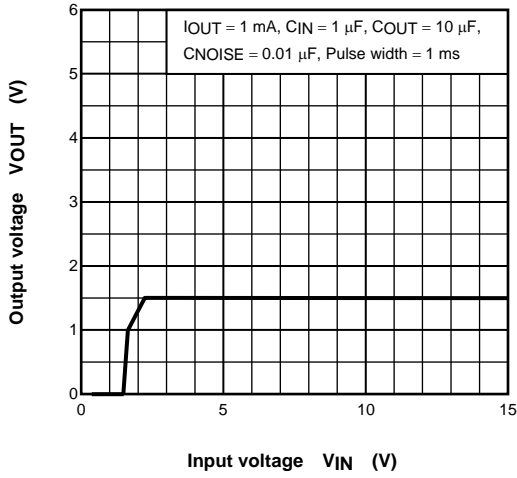


(TAR5SB18) $V_{OUT} - V_{IN}$

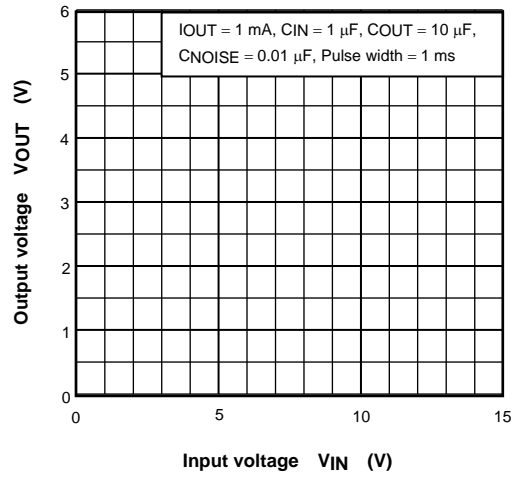


(TAR5SB20) $V_{OUT} - V_{IN}$

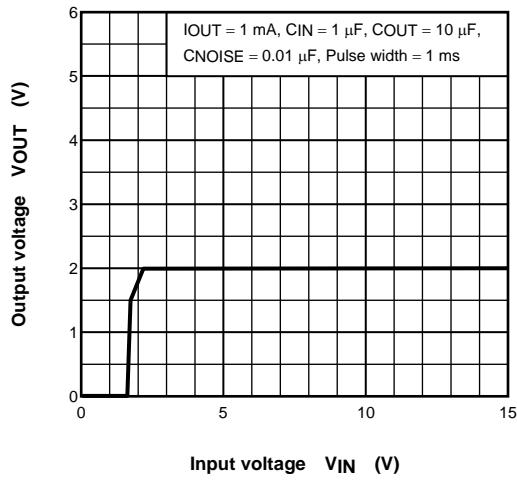


(TAR5SB21) $V_{OUT} - V_{IN}$

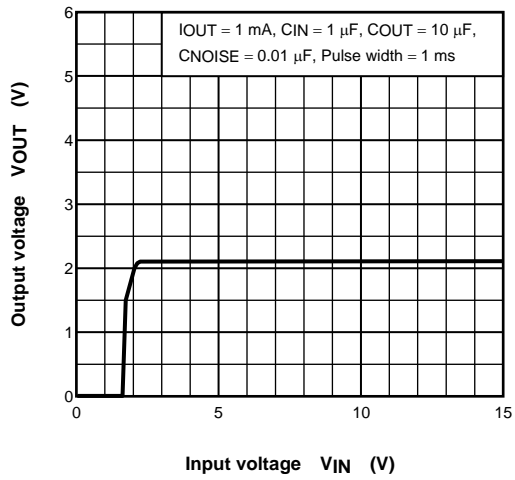


(TAR5SB22) $V_{OUT} - V_{IN}$

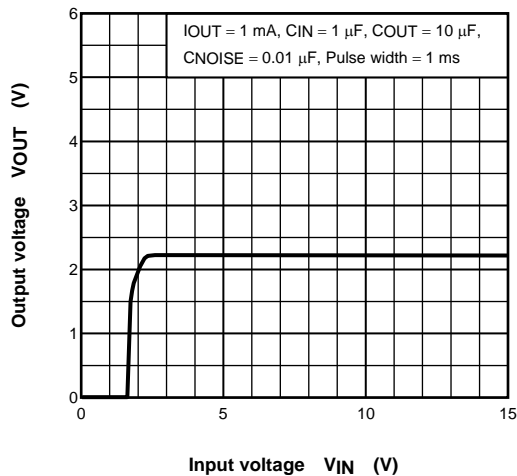


(TAR5SB23) $V_{OUT} - V_{IN}$

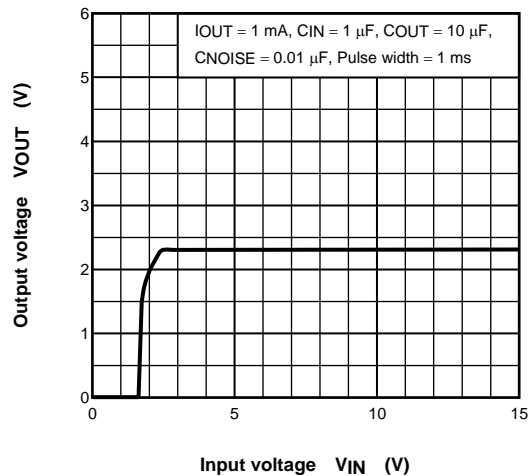


(TAR5SB25) $V_{OUT} - V_{IN}$

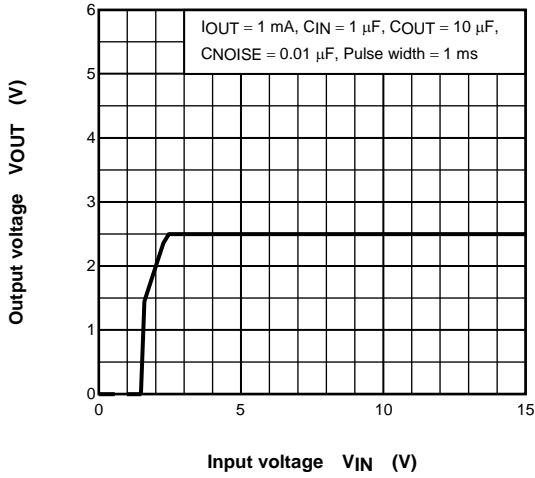


(TAR5SB27) $V_{OUT} - V_{IN}$

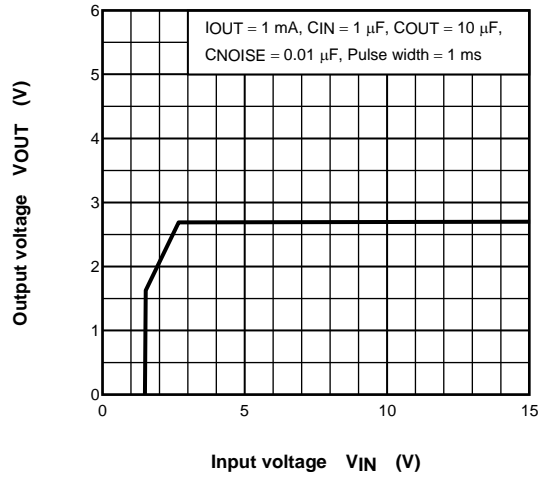


(TAR5SB28) $V_{OUT} - V_{IN}$

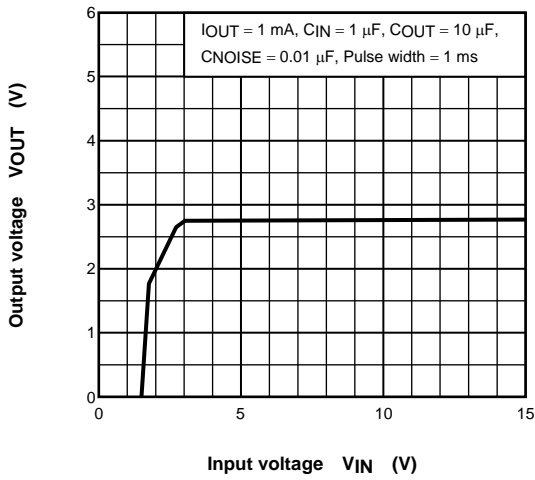


(TAR5SB29) $V_{OUT} - V_{IN}$

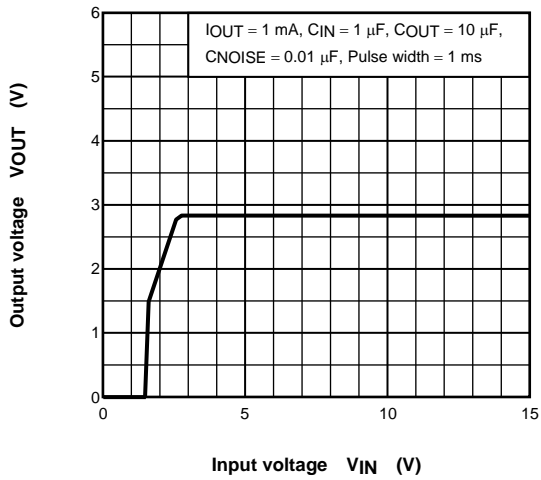


(TAR5SB30) $V_{OUT} - V_{IN}$

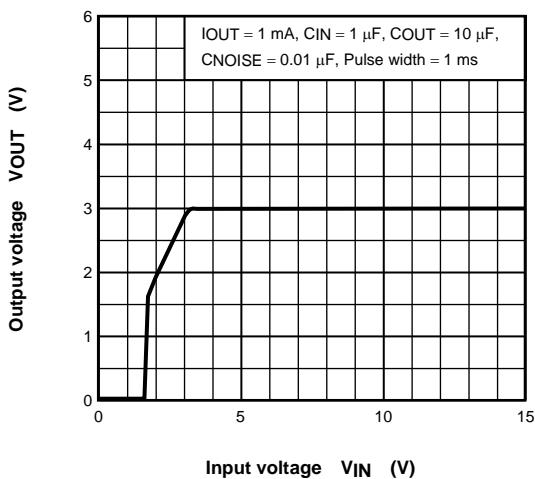


(TAR5SB31) $V_{OUT} - V_{IN}$

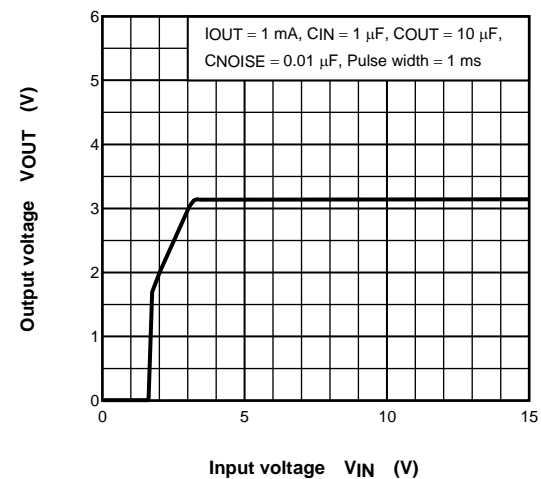


(TAR5SB32) $V_{OUT} - V_{IN}$

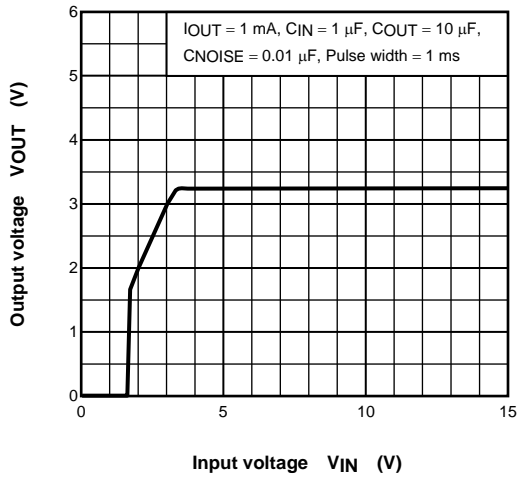


(TAR5SB33) $V_{OUT} - V_{IN}$

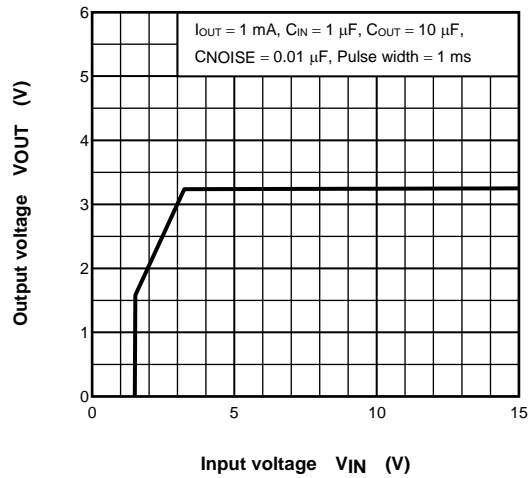


(TAR5SB35) $V_{OUT} - V_{IN}$

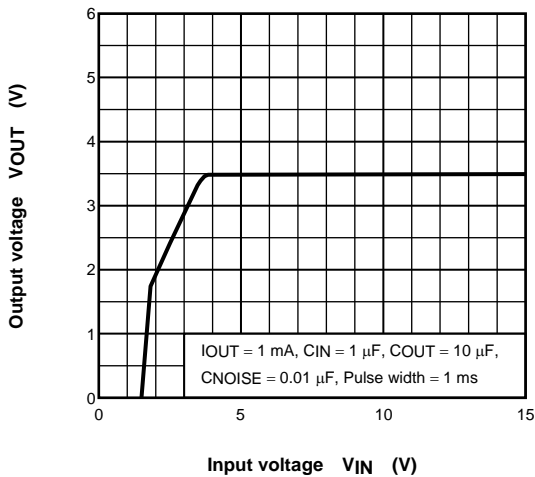


(TAR5SB45) $V_{OUT} - V_{IN}$






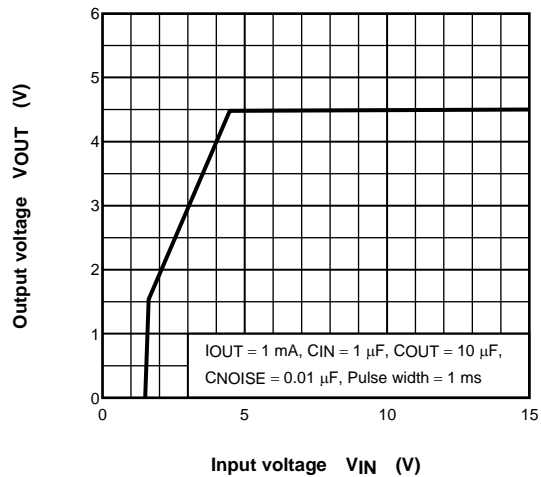








(TAR5SB48) $V_{OUT} - V_{IN}$






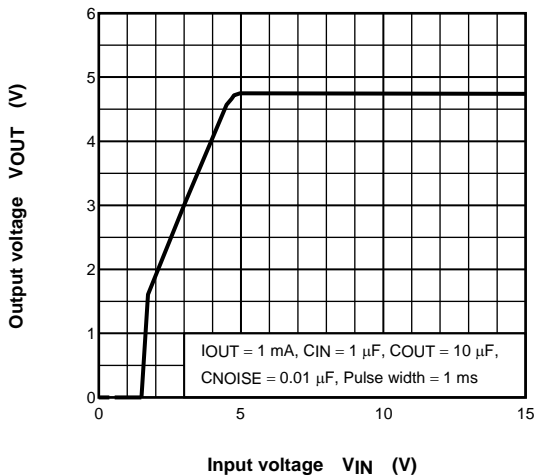








(TAR5SB50) $V_{OUT} - V_{IN}$



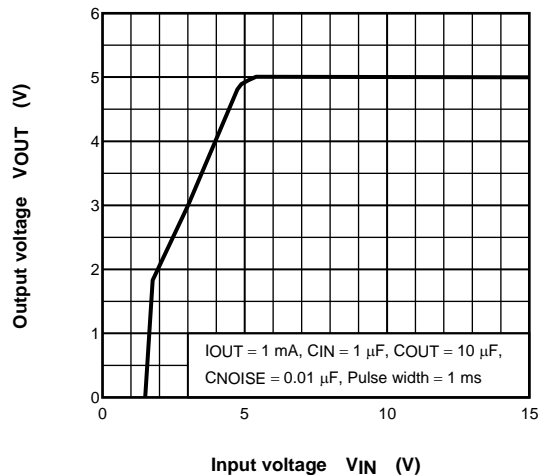


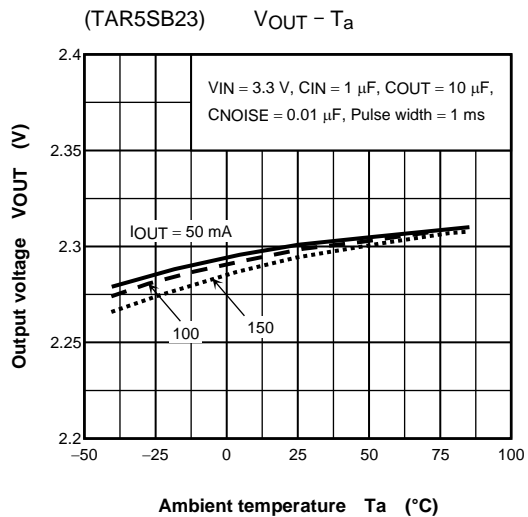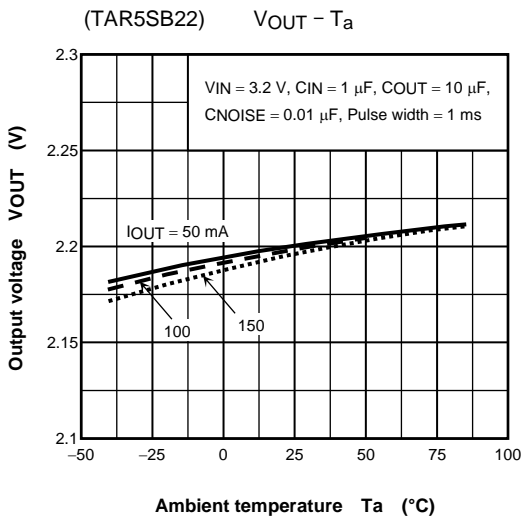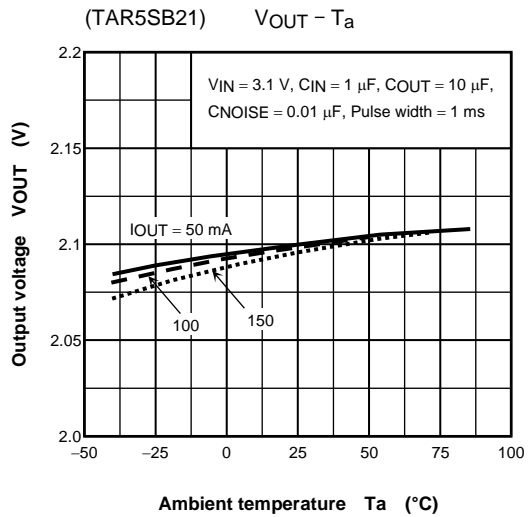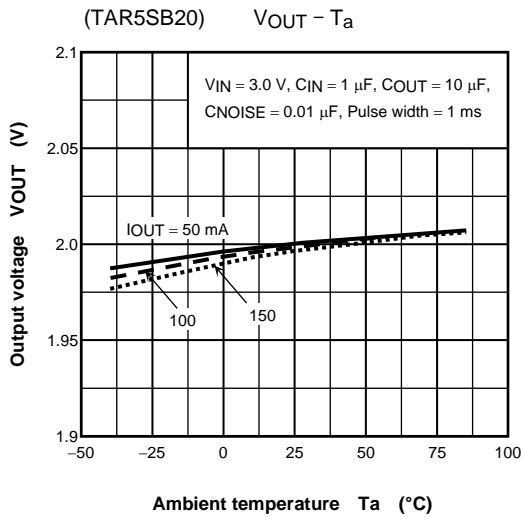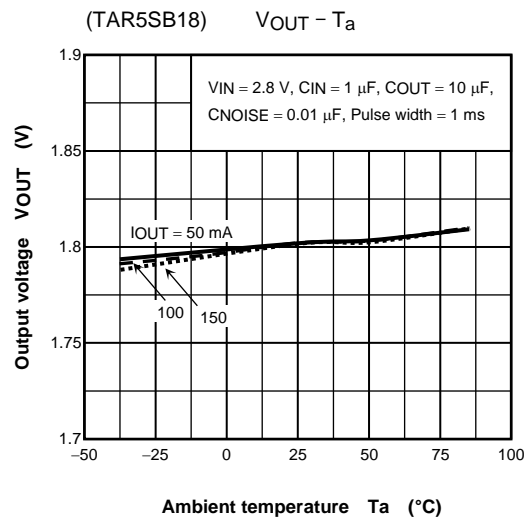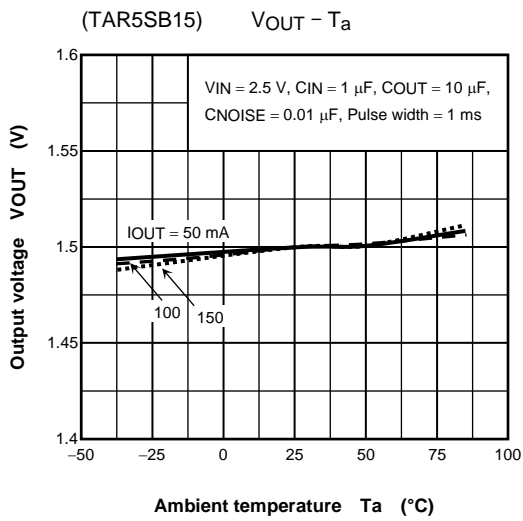

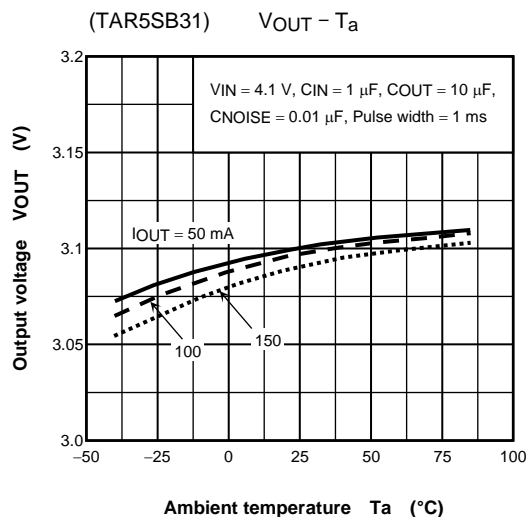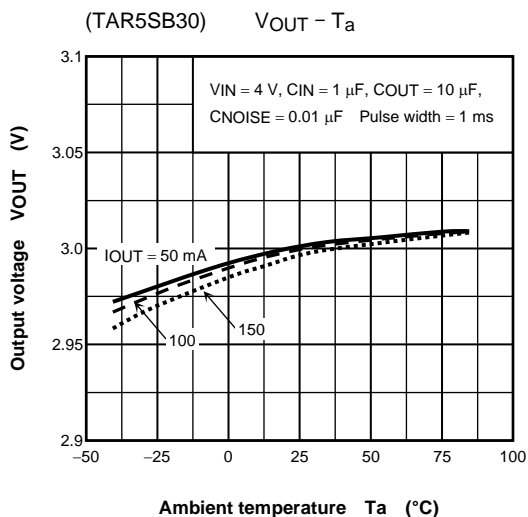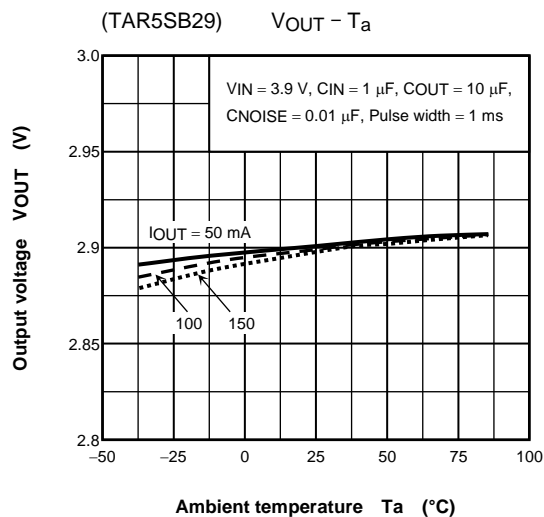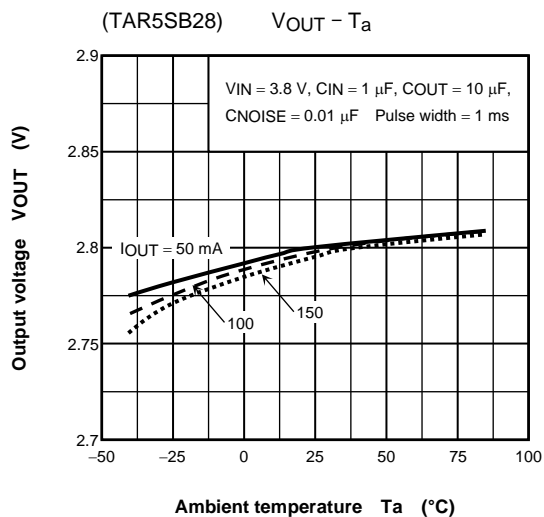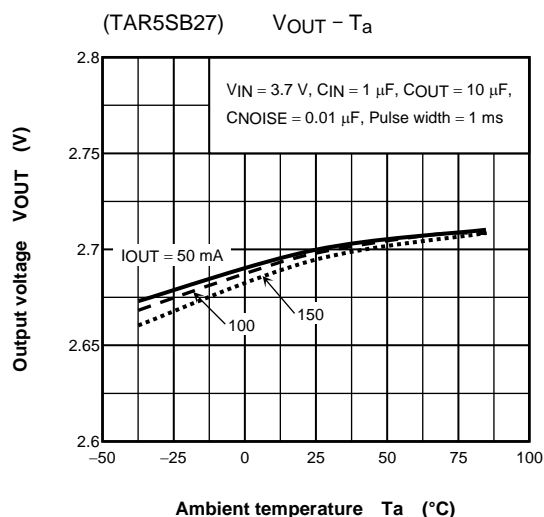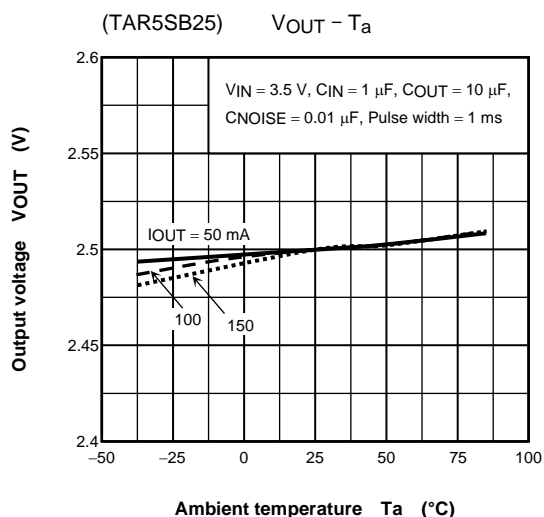

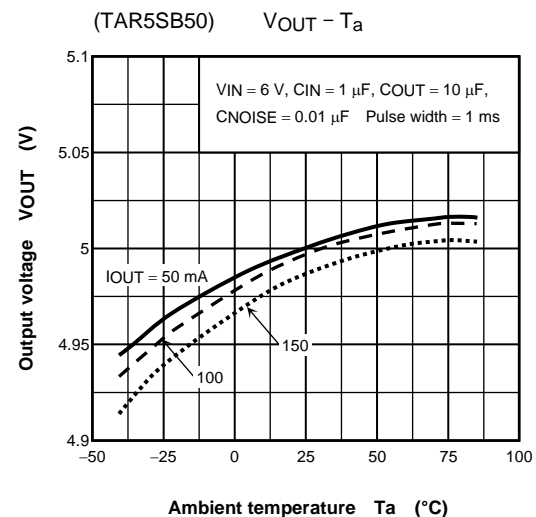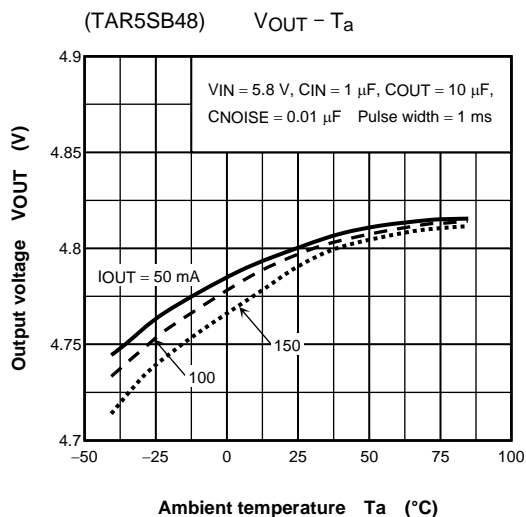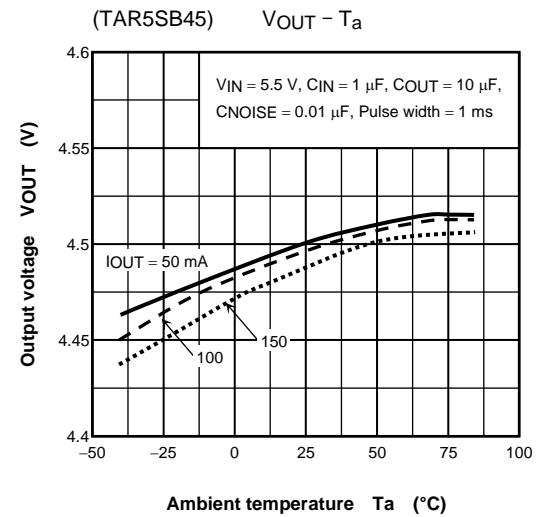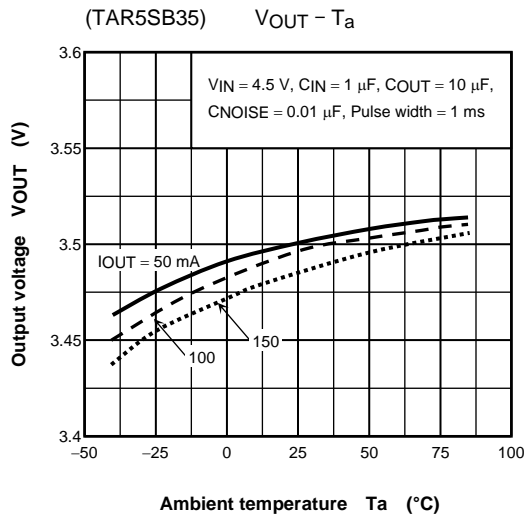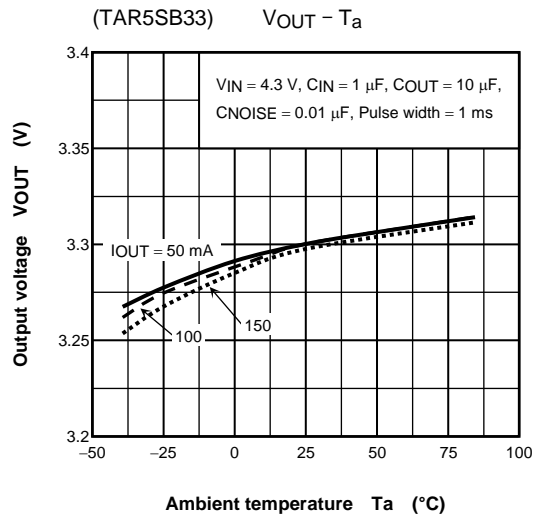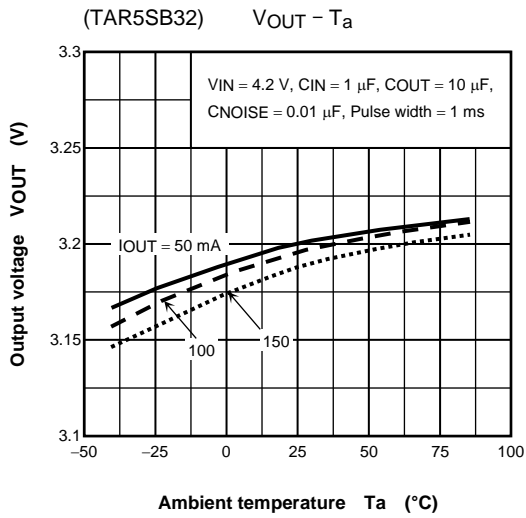

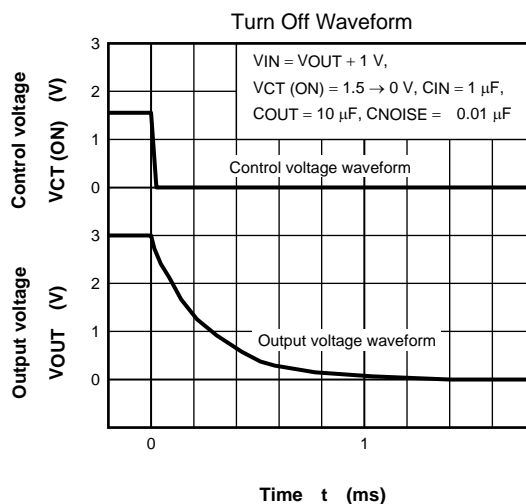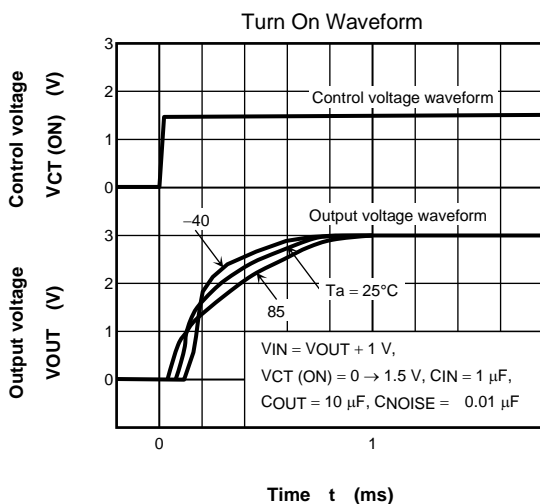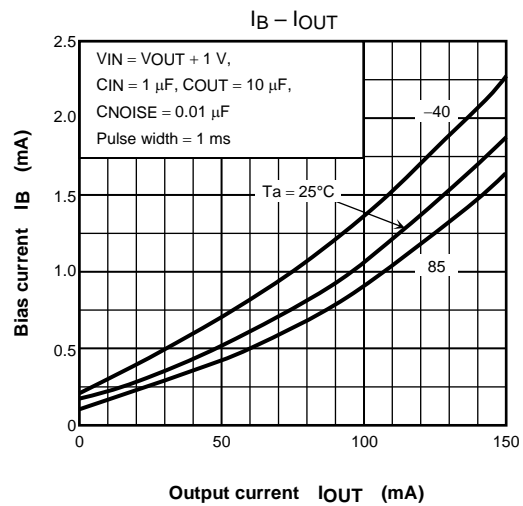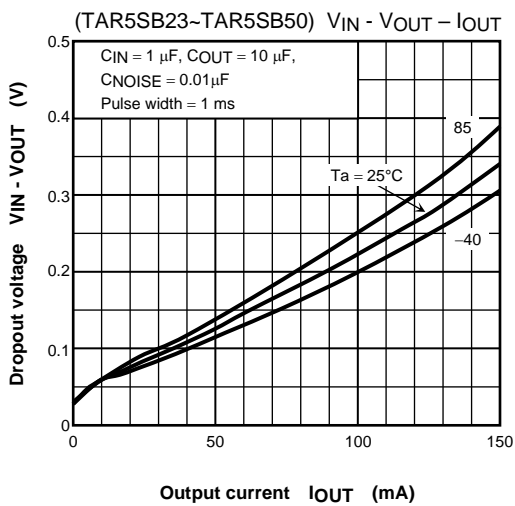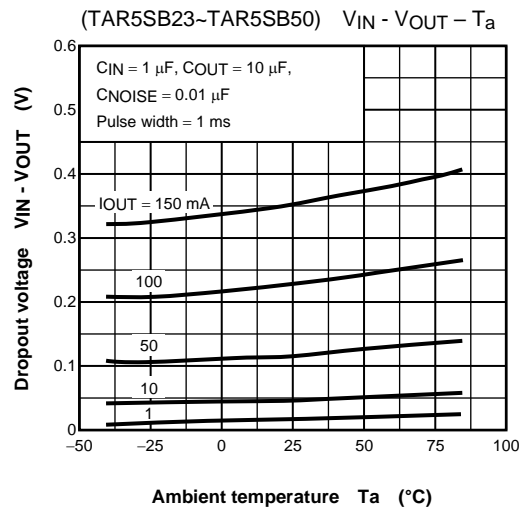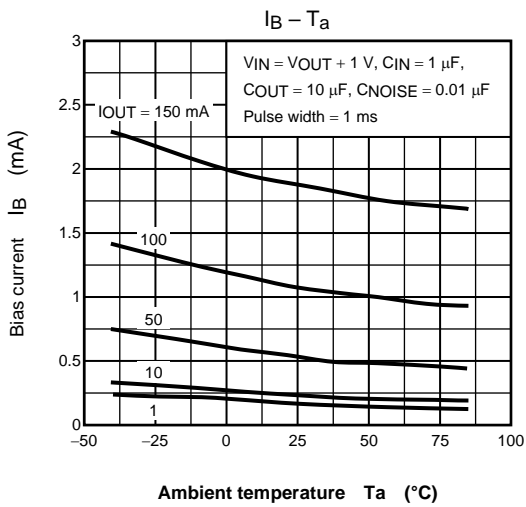

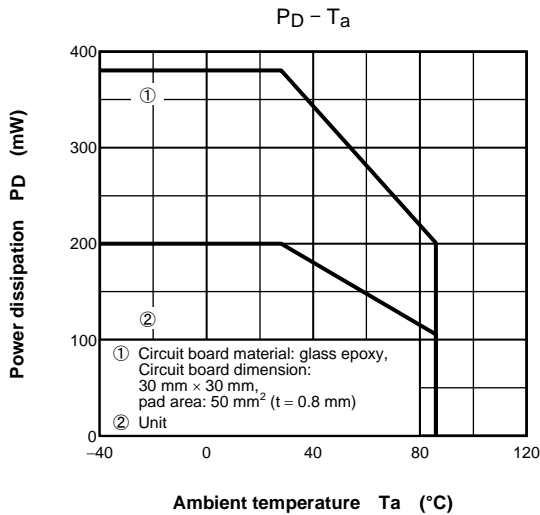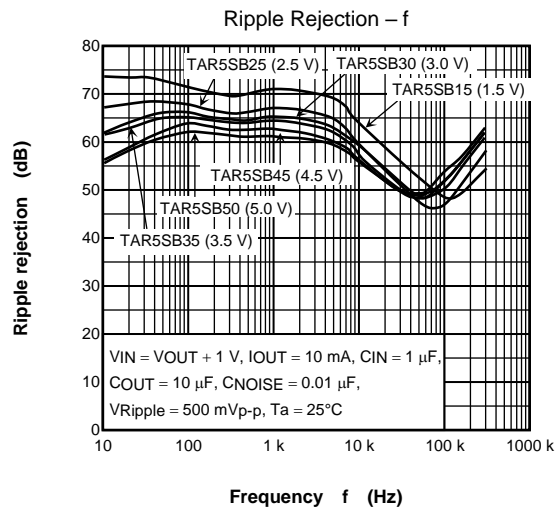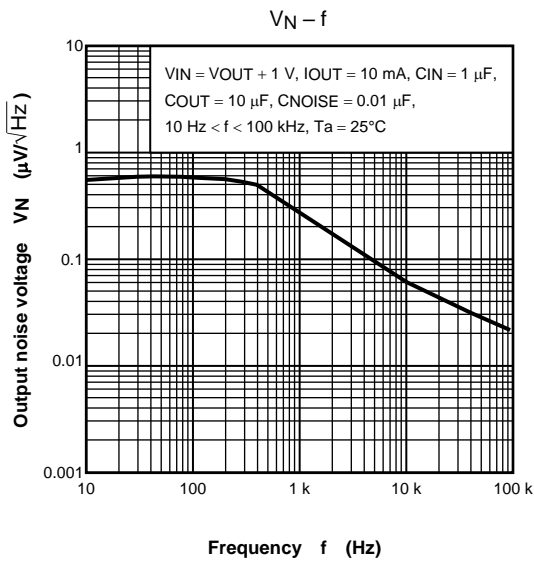


Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

8. Package Information

SSOP5-P-0.95 (SMV)

Unit: mm

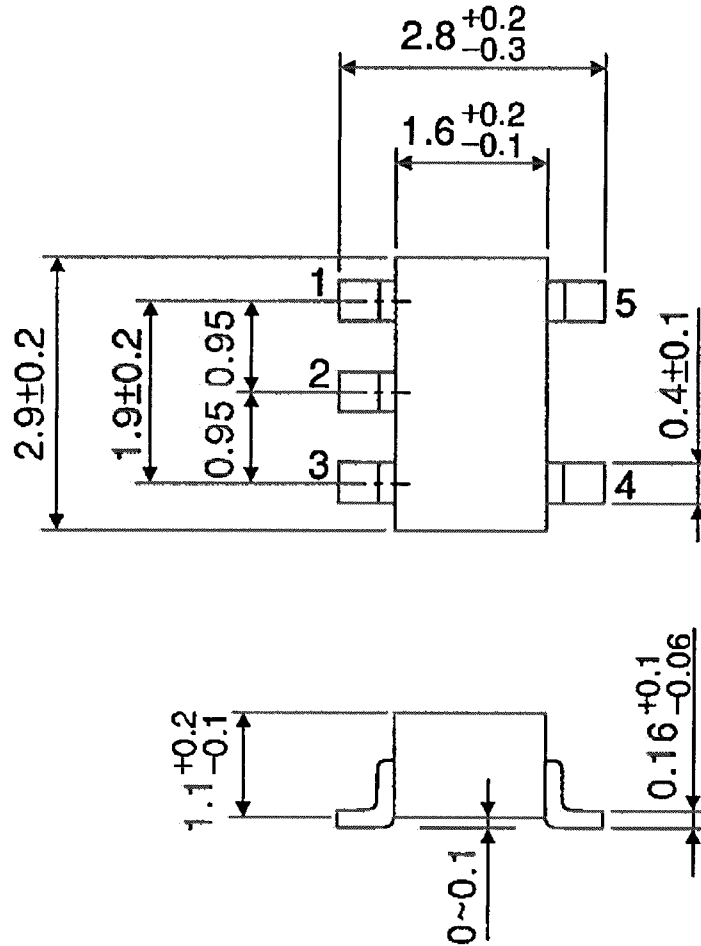

Weight: 0.014 g (typ.)

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, Class 3 medical devices, equipment used for automobiles, and military vehicles and munitions. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**