

TLP2118E

PDP (Plasma Display Panel)
FA (Factory Automation)
Interfaces of measuring and control instruments



The Toshiba TLP2118E provides superior cost performance. The TLP2118E consists of an infrared emitting diodes and integrated high-gain, high-speed photodetectors.

Since the TLP2118E contains two photocouplers in the SO8 package, it saves board space.


The photodetector has an internal Faraday shield that provides a guaranteed common-mode transient immunity of $\pm 15 \text{ kV}/\mu\text{s}$.

- Inverter logic type (Open collector output)
- Package: SO8
- Guaranteed performance over -40 to 100°C
- Power supply voltage: 4.5 to 5.5 V
- Threshold input current: 5.0 mA (max)
- Propagation delay time $t_{\text{pHL}}/t_{\text{pLH}}$: 75 ns (max)
- Common-mode transient immunity: $\pm 15 \text{ kV}/\mu\text{s}$ (min)
- Isolation voltage: 2500 Vrms (min)
- UL-recognized: UL 1577, File No.E67349
- cUL-recognized: CSA Component Acceptance Service No.5A File No.E67349
- VDE-approved: EN 60747-5-5 (Note 1)
Note 1: When a VDE approved type is needed, please designate the **Option (V4)**.

Schematic

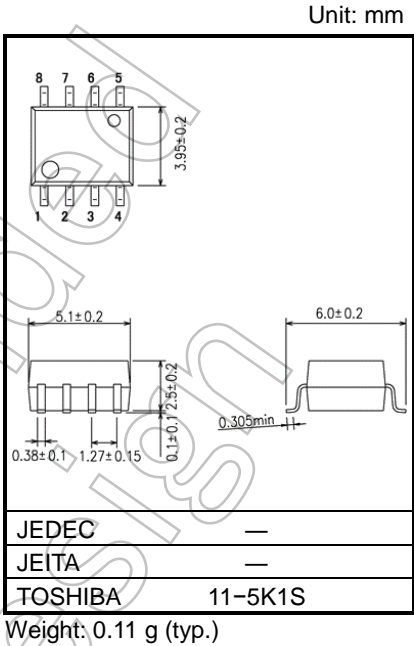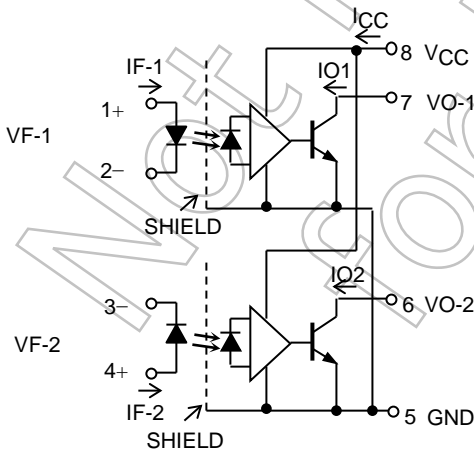

Pin Configuration (Top View)

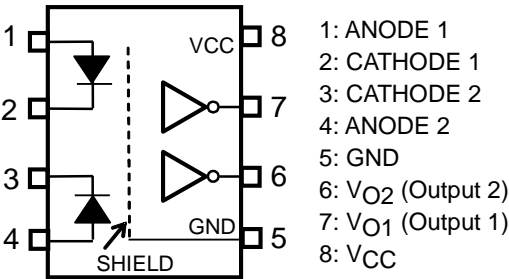

Truth Table

| Input | LED1(2) | Output 1(2) |
|-------|---------|-------------|
| H | ON | L |
| L | OFF | H |

Start of commercial production
2010-04

Absolute Maximum Ratings (Ta=25°C)

| CHARACTERISTIC | | SYMBOL | RATING | UNIT |
|--|---|-------------------------|------------|------------------|
| LED | Forward Current (Note 1) | I _F | 20 | mA |
| | Forward Current Derating (Ta ≥ 90°C) | ΔI _F / ΔTa | -0.6 | mA/°C |
| | Peak Transient Forward Current (Note 1, 2) | I _{FPT} | 40 | mA |
| | Peak Transient Forward Current Derating (Ta ≥ 85°C) | ΔI _{FPT} / ΔTa | -1.0 | mA/°C |
| | Input Power Dissipation (Note 1) | P _D | 40 | mW |
| | Input Power Dissipation Derating (Ta ≥ 85°C) | ΔP _D / ΔTa | -1.0 | mW/°C |
| | Reverse Voltage (Note 1) | V _R | 5 | V |
| DETECTOR | Output Current (Ta ≤ 100°C) (Note 1) | I _O | 25 | mA |
| | Output Voltage (Note 1) | V _O | 6 | V |
| | Supply Voltage | V _{CC} | 6 | V |
| | Output Power Dissipation (Note 1) | P _O | 40 | mW |
| Operating Temperature Range | | T _{opr} | -40 to 100 | °C |
| Storage Temperature Range | | T _{stg} | -55 to 125 | °C |
| Lead Soldering Temperature (10 s) | | T _{sol} | 260 | °C |
| Isolation Voltage (AC, 60 s, R.H. ≤ 60 %,) (Note 3) | | BV _S | 2500 | V _{rms} |

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings. Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Each channel.

Note 2: Pulse width ≤ 1 ms, duty = 50 %.

Note 3: This device is regarded as a two terminal device: pins 1, 2, 3 and 4 are shorted together, as are pins 5, 6, 7 and 8.

Recommended Operating Conditions

| CHARACTERISTIC | SYMBOL | MIN | TYP. | MAX | UNIT |
|-------------------------|---------------------|-----|------|-----|------|
| Input on-state current | I _{F(ON)} | 7.5 | - | 14 | mA |
| Input off-state voltage | V _{F(OFF)} | 0 | - | 0.8 | V |
| Supply Voltage* | V _{CC} | 4.5 | - | 5.5 | V |
| Operating Temperature | T _{opr} | -40 | - | 100 | °C |

*This item denotes operating range, not meaning of recommended operating conditions.

Note: Recommended operating conditions are given as a design guideline to obtain expected performance of the device. Additionally, each item is an independent guideline respectively. In developing designs using this product, please confirm specified characteristics shown in this document.

Electrical Characteristics

(Unless otherwise specified, Ta=-40 to 100°C, Vcc=4.5 to 5.5 V)

| CHARACTERISTIC | SYMBOL | TEST CIRCUIT | Test Condition | MIN | TYP. | MAX | UNIT |
|--|----------------------|--------------|--|-----|------|-----|-------|
| Input Forward Voltage | V _F | — | I _F = 10 mA, Ta = 25 °C | 1.4 | 1.57 | 1.8 | V |
| Temperature Coefficient of Forward Voltage | ΔV _F /ΔTa | — | I _F = 10 mA | — | -2.0 | — | mV/°C |
| Input Reverse Current | I _R | — | V _R = 5 V, Ta = 25 °C | — | — | 10 | μA |
| Input Capacitance | C _T | — | V = 0 V, f = 1 MHz, Ta = 25 °C | — | 60 | — | pF |
| Logic High Output Current | I _{OH} | 1 | V _F = 0.8 V, V _O = 5.5 V Ta = 25 °C | — | — | 250 | μA |
| | | | | — | 0.5 | 10 | |
| Logic Low Output Voltage | V _{OL} | 2 | I _F = 10 mA, I _O = 13 mA (Sinking) | — | 0.25 | 0.6 | V |
| Logic Low Supply Current | I _{CC} L | 3 | I _{F1} = I _{F2} = 10 mA | — | 3 | 10 | mA |
| Logic High Supply Current | I _{CC} H | 4 | I _F = 0 mA | — | 3 | 10 | mA |
| Threshold input current (H/L) | I _{FHL} | — | I _O = 13 mA (Sinking), V _O < 0.6 V | — | 1.0 | 5.0 | mA |

*All typical values are at Ta = 25°C, V_{CC} = 5V unless otherwise specified

Isolation Characteristics (Ta = 25°C)

| Characteristic | Symbol | Test Condition | Min | Typ. | Max | Unit |
|-----------------------------|-----------------|--|--------------------|------------------|-----|------------------|
| Capacitance input to output | C _S | V _S = 0 V, f = 1 MHz (Note 3) | — | 0.8 | — | pF |
| Isolation resistance | R _S | R.H. ≤ 60 %, V _S = 500 V (Note 3) | 1×10 ¹² | 10 ¹⁴ | — | Ω |
| Isolation voltage | BV _S | AC, 60 s (Note 3) | 2500 | — | — | V _{rms} |

Switching Characteristics

(Unless otherwise specified, $T_a = -40$ to 100°C , $V_{CC} = 4.5$ to 5.5 V)(Each Channel)

| CHARACTERISTIC | SYMBOL | TEST CIRCUIT | Test Condition | | MIN. | TYP. | MAX. | UNIT |
|---|------------------------------------|--------------|---|---|------|------|------|-------|
| Propagation Delay Time to Logic Low output | t _{pHL} | 5 | I _F = 0→7.5 mA | R _L = 350 Ω C _L = 15 pF (Note 4) | - | 35 | 75 | ns |
| Propagation Delay Time to Logic High output | t _{pLH} | | I _F = 7.5→0 mA | | - | 35 | 75 | ns |
| Switching Time Dispersion between ON and OFF | t _{pHL} -t _{pLH} | | I _F = 0↔7.5 mA | R _L = 350 Ω, C _L = 15 pF (Note 4) | - | - | 35 | ns |
| Propagation Delay Skew (Note 5) | t _{psk} | | | | -50 | - | 50 | ns |
| Fall Time (90 – 10 %) | t _f | | I _F = 0→7.5 mA | R _L = 350 Ω C _L = 15 pF (Note 4) | - | 30 | - | ns |
| Rise Time (10 – 90 %) | t _r | | I _F = 7.5→0 mA | | - | 30 | - | ns |
| Common Mode transient Immunity at High Level Output | CM _H | 6 | V _{CM} = 1000 V _{p-p} , I _F = 0 mA, V _{CC} = 5 V , T _a = 25 °C | | 15 | - | - | kV/μs |
| Common Mode transient Immunity at Low Level Output | CM _L | | V _{CM} = 1000 V _{p-p} , I _F =10 mA, V _{CC} = 5 V , T _a = 25 °C | | -15 | - | - | kV/μs |

*All typical values are at $T_a = 25^\circ\text{C}$

Note: A ceramic capacitor (0.1 μF) should be connected from pin 8 (V_{CC}) to pin 5 (GND) to stabilize the operation of the high gain linear amplifier. Failure to provide the bypass may impair the switching property.


The total lead length between capacitor and coupler should not exceed 1 cm.

Note 4: $f = 5$ MHz, duty = 50 %, input current $t_r = t_f = 5$ ns,


C_L is approximately 15pF which includes probe and jig/stray wiring capacitance.

Note 5: Propagation delay skew is defined as the difference between the largest and smallest propagation delay times (i.e. t_{pHL} or t_{pLH}) of multiple samples. Evaluations of these samples are conducted under identical test conditions (supply voltage, input current, temperature, etc).


TEST CIRCUIT 1: I_{OH} Test Circuit

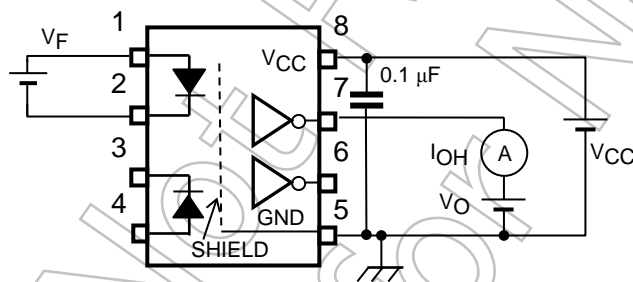


TEST CIRCUIT 2: V_{OL} Test Circuit

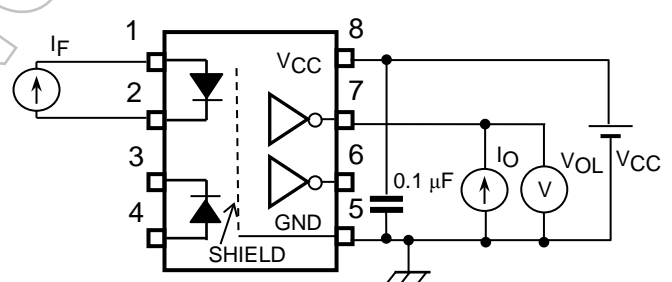

TEST CIRCUIT 3: I_{CCL} Test Circuit

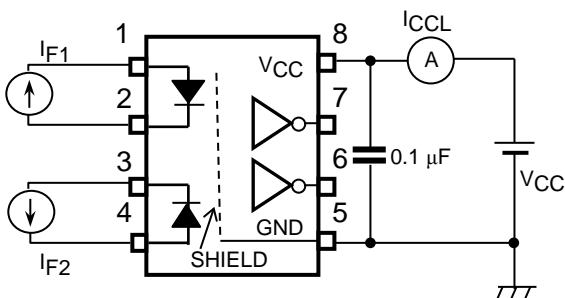


TEST CIRCUIT 4: I_{CCH} Test Circuit

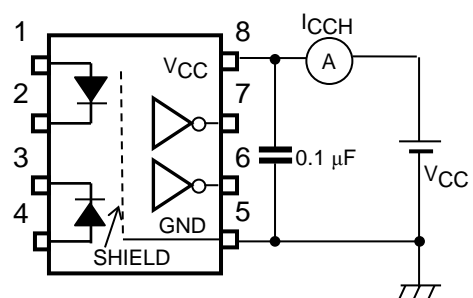


$$I_F = 7.5 \text{ mA (P.G)}$$
[illegible]







C_L includes probe and stray capacitance.
P.G.: Pulse generator

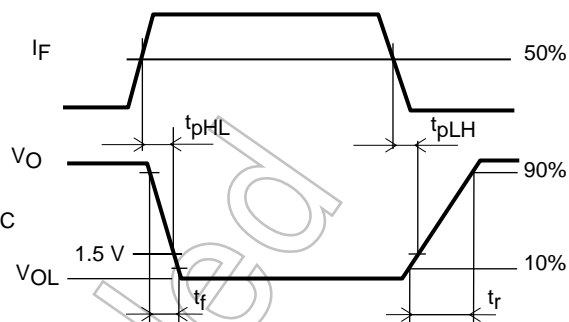


The circuit diagram shows a 74VHC04 hex inverter chip. Pin 1 is connected to a switch (SW) and a current source I_F . Pin 2 is connected to a common-mode voltage source V_{CM} . Pin 3 is connected to the same V_{CM} source. Pin 4 is connected to the same V_{CM} source. Pin 5 is connected to ground (GND). Pin 6 is connected to a $0.1 \mu F$ capacitor. Pin 7 is connected to the output V_O . Pin 8 is connected to V_{CC} . The output V_O is connected to a load resistor $R_L = 350 \Omega$. The output V_O is also connected to a common-mode voltage source V_{CM} . The output V_O is also connected to a common-mode voltage source V_{CM} .

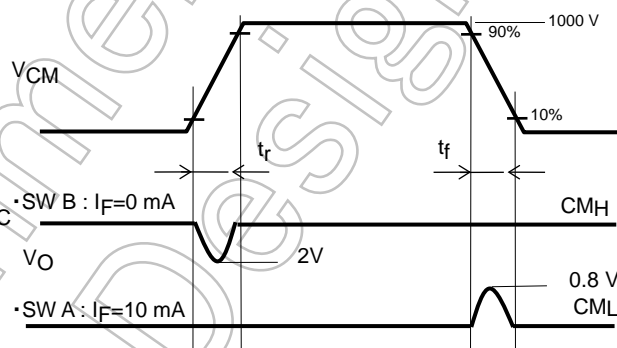

$$C_{M_H} = \frac{800(V)}{t_r(\mu s)} \quad C_{M_L} = \frac{800(V)}{t_f(\mu s)}$$

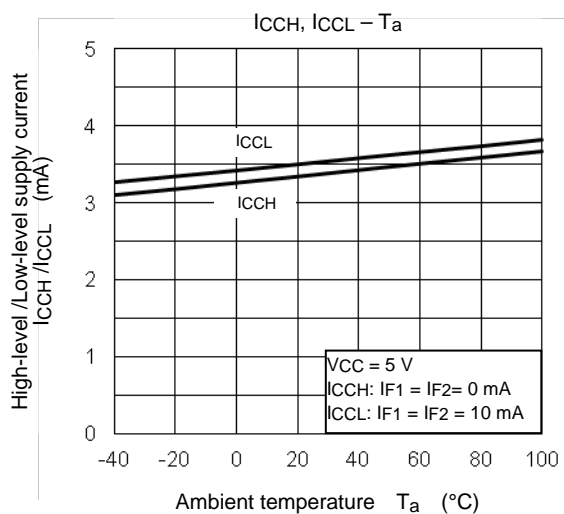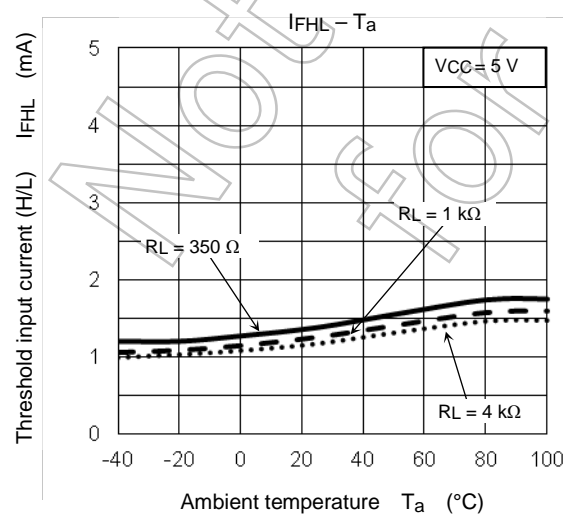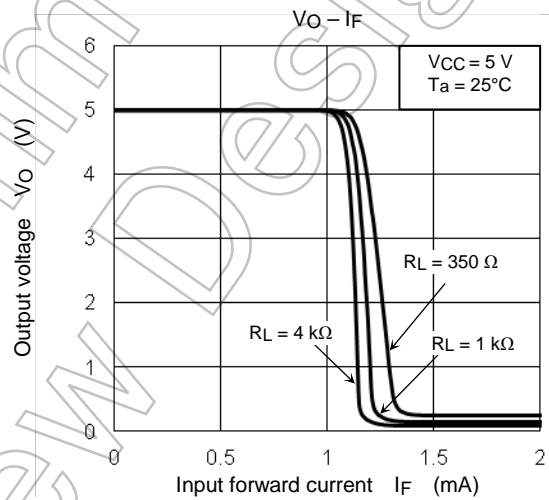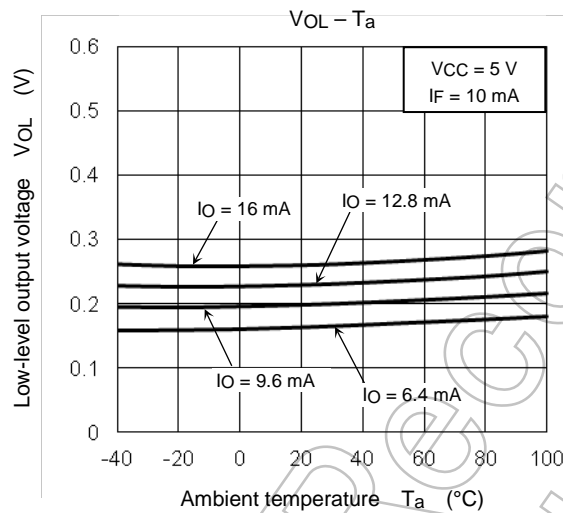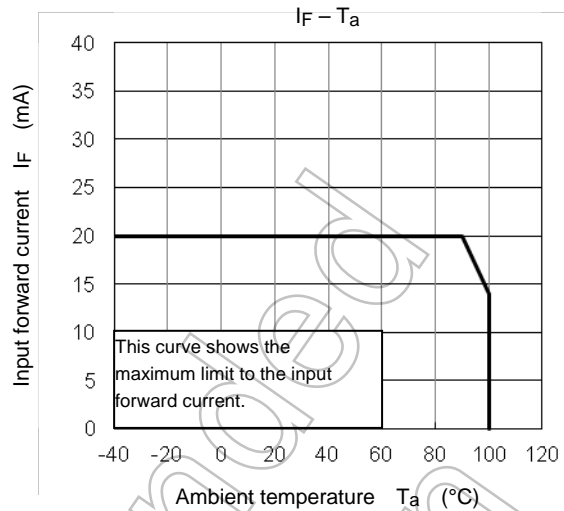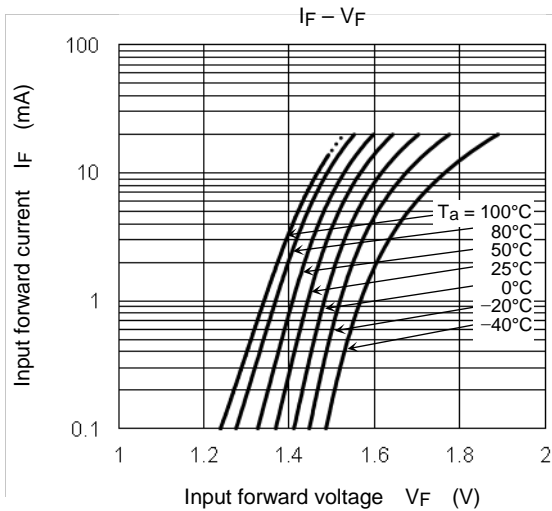

NOTE: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

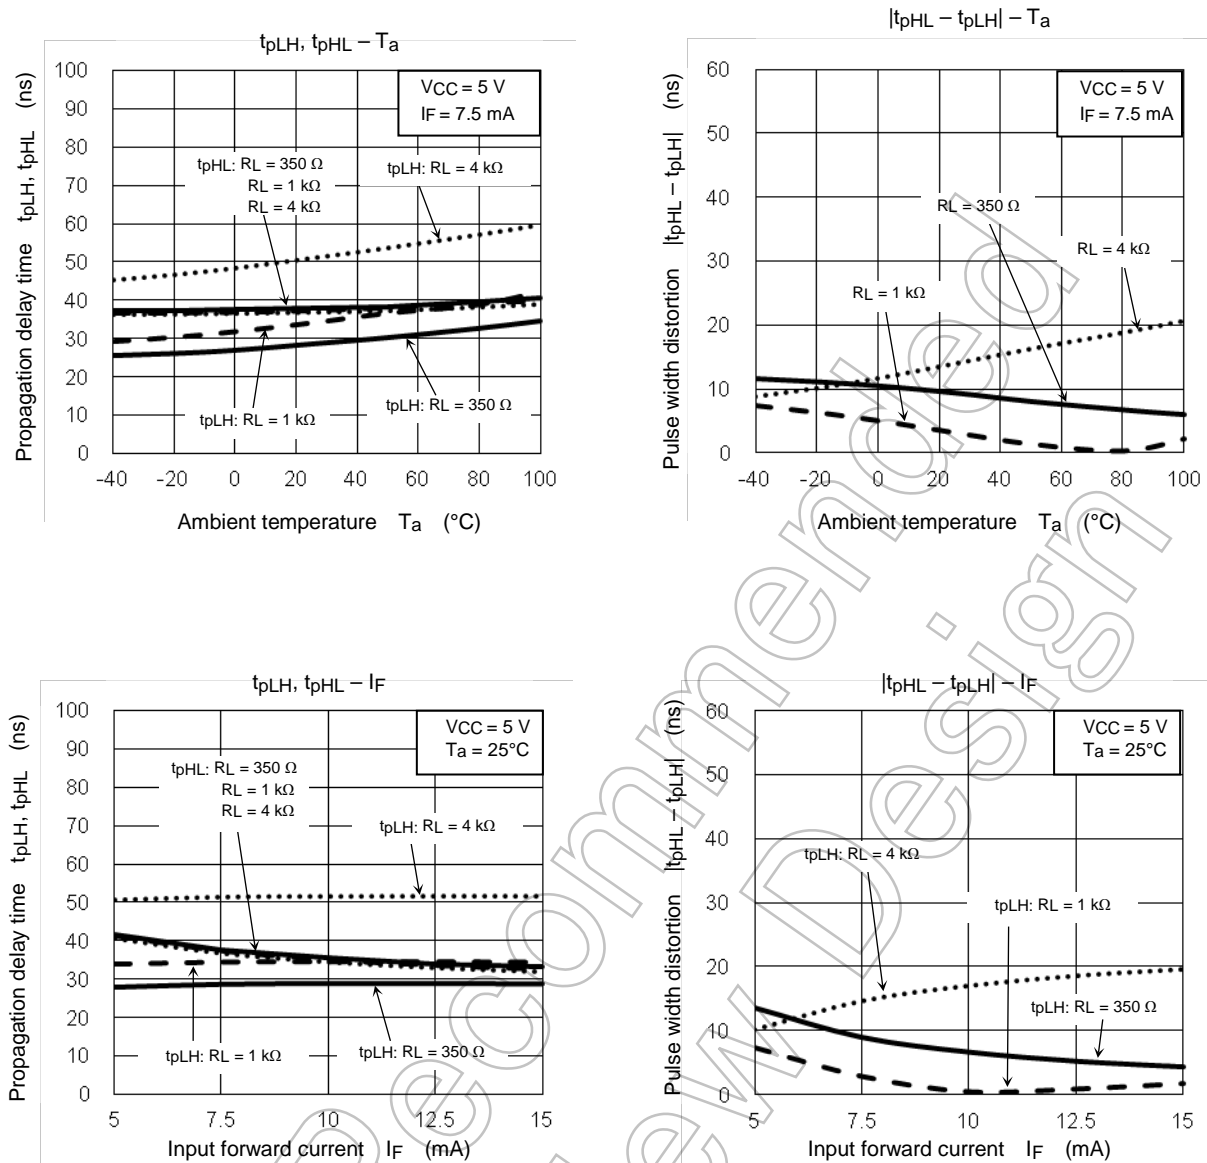


NOTE: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

PRECAUTIONS OF SURFACE MOUNTING TYPE PHOTOCOUPLER SOLDERING & GENERAL STORAGE

(1) Precautions for Soldering

1) When Using Soldering Reflow


- An example of a temperature profile when Sn-Pb eutectic solder is used:

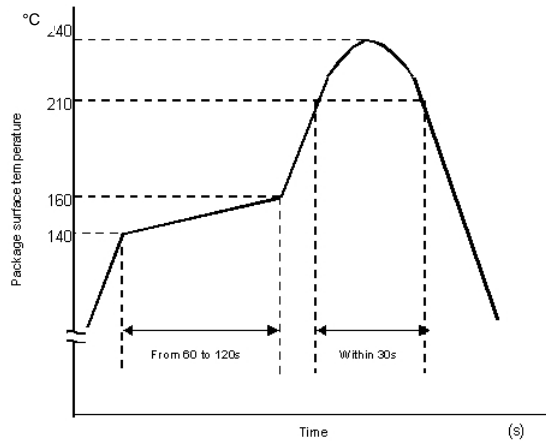

This profile is based on the device's maximum heat resistance guaranteed value.

Set the preheat temperature/heating temperature to the optimum temperature corresponding to the solder paste type used by the customer within the described profile.

solder is used:

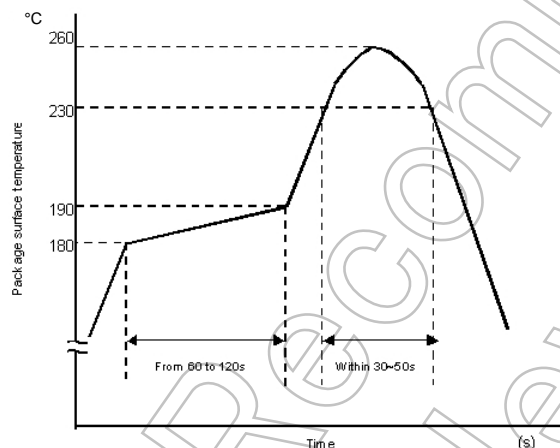

This profile is based on the device's maximum heat resistance guaranteed value.

Set the preheat temperature/heating temperature to the optimum temperature corresponding to the solder paste type used by the customer within the described profile.

- Reflow soldering must be performed once or twice.
- The mounting should be completed with the interval from the first to the last mountings being 2 weeks.

2) When using soldering Flow (Applicable to both eutectic solder and Lead(Pb)-Free solder)

- Apply preheating of 150 °C for 60 to 120 seconds.
- Mounting condition of 260 °C and within 10 seconds is recommended.
- Flow soldering must be performed once.

3) When using soldering Iron (Applicable to both eutectic solder and Lead(Pb)-Free solder)

- Complete soldering within 10 seconds for lead temperature not exceeding 260 °C or within 3 seconds not exceeding 350 °C.
- Heating by soldering iron must be only once per one lead.

(2) Precautions for General Storage

- 1) Do not store devices at any place where they will be exposed to moisture or direct sunlight.
- 2) When transportation or storage of devices, follow the cautions indicated on the carton box.
- 3) The storage area temperature should be kept within a temperature range of 5 °C to 35 °C, and relative humidity should be maintained at between 45% and 75%.
- 4) Do not store devices in the presence of harmful (especially corrosive) gases, or in dusty conditions.
- 5) Use storage areas where there is minimal temperature fluctuation. Because rapid temperature changes can cause condensation to occur on stored devices, resulting in lead oxidation or corrosion, as a result, the solderability of the leads will be degraded.
- 6) When repacking devices, use anti-static containers.
- 7) Do not apply any external force or load directly to devices while they are in storage.
- 8) If devices have been stored for more than two years, even though the above conditions have been followed, it is recommended that solderability of them should be tested before they are used.

Not Recommended for New Design

Specification for Embossed–Tape Packing (TP) for SO8 Coupler


1. Applicable Package

| Package | Product Type |
|---------|--------------|
| SO8 | Photocoupler |

2. Product Naming System

Type of package used for shipment is denoted by a symbol suffix after a product number. The method of classification is as below.

(Example)

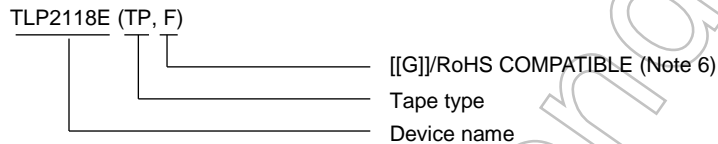

3. Tape Dimensions

3.1 Orientation of Device in Relation to Direction of Tape Movement

Device orientation in the recesses is as shown in Figure 1.

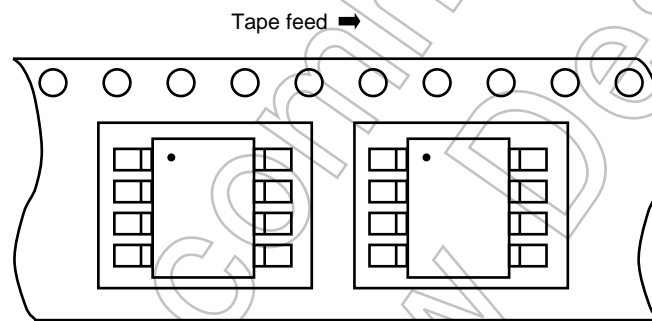


Figure 1 Device Orientation

3.2 Tape Packing Quantity: 2500 devices per reel

3.3 Empty Device Recesses Are as Shown in Table 1.

Table 1 Empty Device Recesses

| | Standard | Remarks |
|---|--------------------------|--|
| Occurrences of 2 or more successive empty device recesses | 0 device | Within any given 40-mm section of tape, not including leader and trailer |
| Single empty device recesses | 6 devices (max) per reel | Not including leader and trailer |

3.4 Start and End of Tape

The start of the tape has 50 or more empty holes. The end of tape has 50 or more empty holes and two empty turns only for a cover tape.

3.5 Tape Specification

- (1) Tape material: Plastic (protection against electrostatics)
- (2) Dimensions: The tape dimensions are as shown in Figure 2 and table 2.

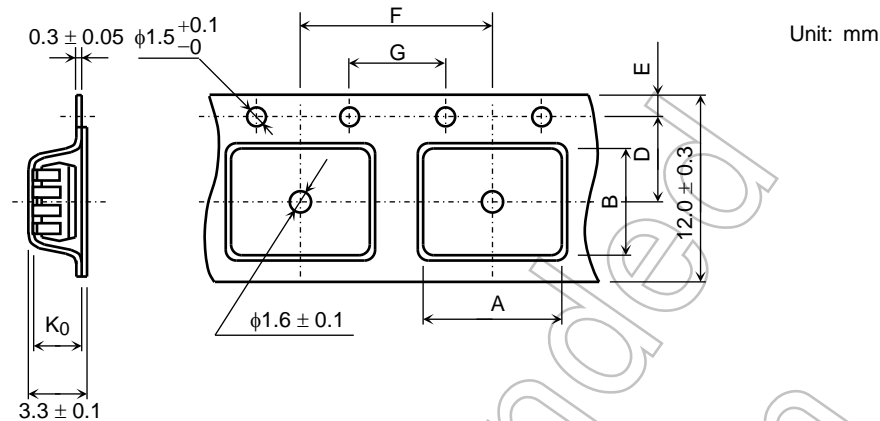


Figure 2 Tape Forms

Table 2 Tape Dimensions

Unit: mm
Unless otherwise specified: ±0.1

| Symbol | Dimension | Remark |
|--------|-----------|---|
| A | 6.5 | — |
| B | 5.6 | — |
| D | 5.5 | Center line of indented square hole and sprocket hole |
| E | 1.75 | Distance between tape edge and hole center |
| F | 8.0 | Cumulative error $\begin{smallmatrix} +0.1 \\ -0.3 \end{smallmatrix}$ (max) per 10 feed holes |
| G | 4.0 | Cumulative error $\begin{smallmatrix} +0.1 \\ -0.3 \end{smallmatrix}$ (max) per 10 feed holes |
| K0 | 3.1 | Internal space |

3.6 Reel

- (1) Material: Plastic (protection against electrostatics)
- (2) Dimensions: The reel dimensions are as shown in Figure 3 and Table 3.

Table 3 Reel Dimensions

Unit: mm

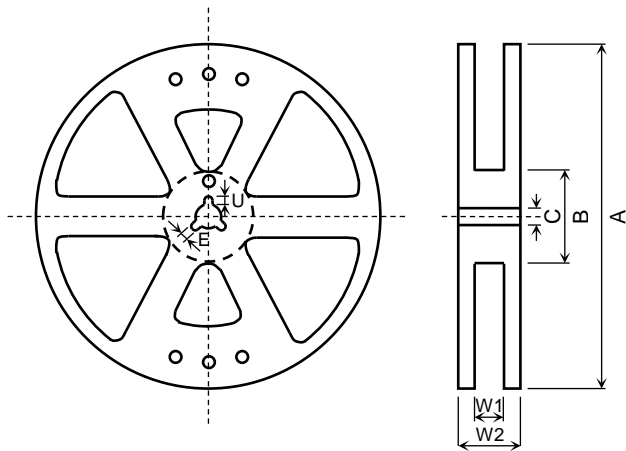


Figure 3 Reel Form

| Symbol | Dimension |
|--------|-------------------|
| A | $\Phi 330 \pm 2$ |
| B | $\Phi 80 \pm 1$ |
| C | $\Phi 13 \pm 0.5$ |
| E | 2.0 ± 0.5 |
| U | 4.0 ± 0.5 |
| W1 | 13.5 ± 0.5 |
| W2 | 17.5 ± 1.0 |

4. Packing

Packed in a shipping carton.


5. Label Indication

The carton bears a label indicating the product number, the symbol representing classification of standard, the quantity, the lot number and the Toshiba company name.

6. Ordering Method

When placing an order, please specify the product number, the tape type and the quantity as shown in the following example.

(Example)

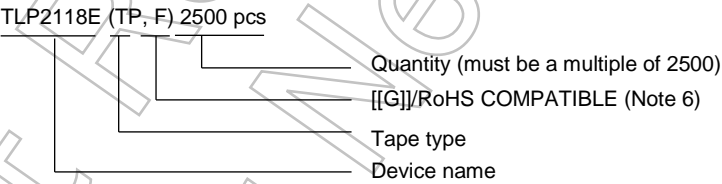

Note 6: Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product.
RoHS is the Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronics equipment.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**