

Glossary of CMOS Logic IC

Outline:

Glossary used in datasheets (absolute max. ratings, operating ranges, electrical characteristics, and built-in functions) for CMOS Logic ICs and one-gate logic (L-MOS) are explained.

Table of Contents

| | |
|--|-----------|
| Table of Contents | 2 |
| 1. Absolute Maximum Ratings | 3 |
| 2. Operating Ranges | 4 |
| 3. Electrical Characteristics | 5 |
| 4. Built-in Functions..... | 12 |
| 5 Related LINK..... | 13 |
| RESTRICTIONS ON PRODUCT USE | 14 |

1. Absolute Maximum Ratings

| Parameter | Symbol | Definition |
|------------------------|----------------------------|---|
| Supply voltage | V_{CC} V_{EE} | The rated voltage of the power supply terminal at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. |
| Supply voltage | $V_{CC} - V_{EE}$ | The rated voltage across the V_{CC} and V_{EE} terminals at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. |
| Input voltage | V_{IN} | The rated voltage of the input terminal at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. |
| Output voltage | V_{OUT} | The rated voltage of the output terminal at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. |
| Switch I/O voltage | $V_{I/O}$ | The rated voltage across the input and output terminals at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. |
| Input diode current | I_{IK} | The rated current of the input terminal at which an IC will not suffer breakdown due to latch-up. |
| Output diode current | I_{OK} | The rated current of the output terminal at which an IC will not suffer breakdown due to latch-up. |
| Output current | I_{OUT} | The rated current that can flow through one output terminal. |
| Switch through current | I_T | The rated current between the input and output terminals of a switch at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. |
| VCC/ground current | I_{CC} I_{CC} / GND | The rated current between the power supply and ground terminals at which an IC will not suffer breakdown, deterioration of characteristics, or reduced reliability. As V_{CC} / ground current includes output current, substantial V_{CC} / ground current can flow in an IC having multiple output terminals. |
| Power dissipation | P_D | Power consumption that does not cause IC breakdown over the entire operating temperature range. |
| Storage temperature | T_{stg} | The ambient temperature range over which no deterioration of characteristics or reliability occurs when an IC is stored for a long period of time or is transported with no supply voltage present. |

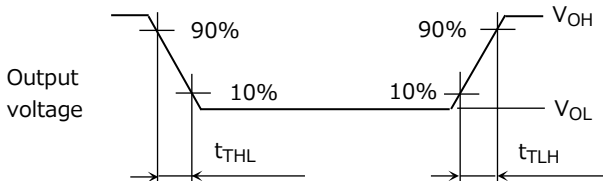
2. Operating Ranges

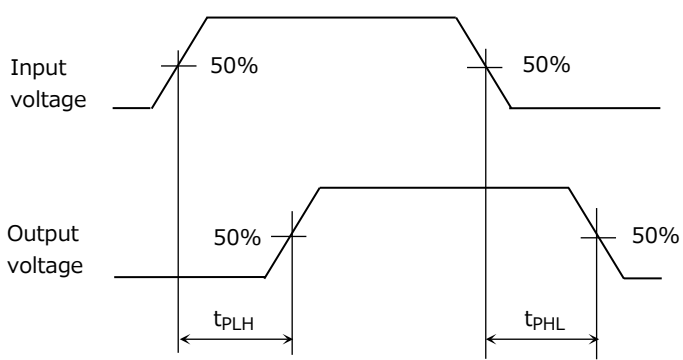
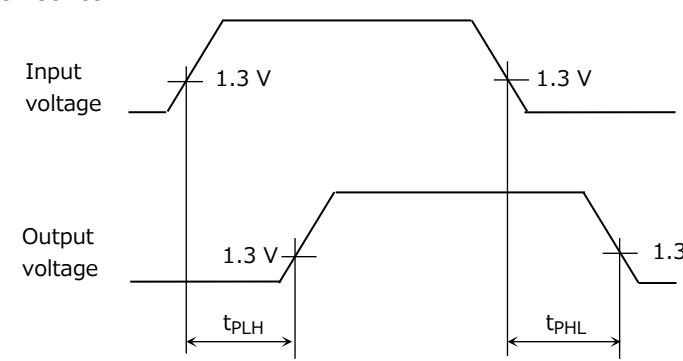
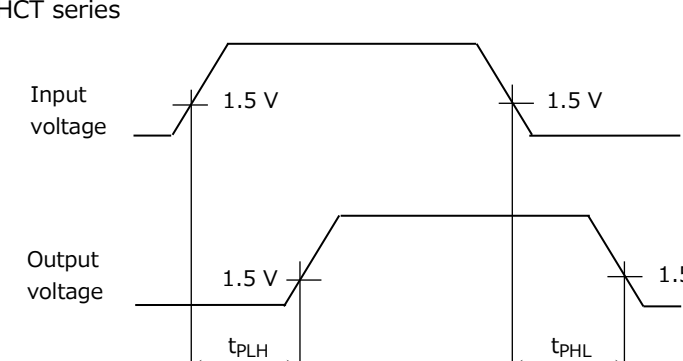
| Parameter | Symbol | Definition |
|---------------------------|---|---|
| Supply voltage | V_{CC} V_{EE} $V_{CC} - V_{EE}$ | The supply voltage range over which the normal operation of an IC is guaranteed. |
| Input voltage | V_{IN} | The input voltage range over which the normal operation and electrical characteristics of an IC are guaranteed. |
| Output voltage | V_{OUT} | The output voltage range over which the normal operation and electrical characteristics of an IC are guaranteed. |
| Switch I/O voltage | V_S $V_{I/O}$ | The switch I/O voltage range over which the normal operation and electrical characteristics of an IC are guaranteed. |
| Output current | I_{OUT} I_{OH}, I_{OL} I_{OL} | The maximum output current at which the normal operation and electrical characteristics of an IC are guaranteed. |
| Input rise and fall times | t_r, t_f dt/dv | The ranges of rise and fall times of an input signal that will not cause malfunction due to oscillation of the output. |
| External capacitor | C_X | The external capacitance range over which the normal operation and electrical characteristics of a multivibrator IC are guaranteed. |
| External resistor | R_X | The external resistance range over which the normal operation and electrical characteristics of a multivibrator IC are guaranteed. |
| Operating temperature | T_{opr} | The operating temperature range over which the normal operation and electrical characteristics of an IC are guaranteed. |

3. Electrical Characteristics

| Parameter | Symbol | Definition |
|--|-----------|--|
| High-level input voltage | V_{IH} | The input voltage at which input of an IC is driven to the High level. |
| Low-level input voltage | V_{IL} | The input voltage at which the input of an IC is driven to the Low level. |
| Positive threshold voltage | V_P | The input threshold voltage at which a Schmitt-trigger input is driven to the High level. |
| Negative threshold voltage | V_N | The input threshold voltage at which a Schmitt-trigger input is driven to the Low level. |
| Hysteresis voltage | V_H | The difference between the positive and negative threshold voltages of a Schmitt trigger input. |
| High-level output voltage | V_{OH} | The voltage that appears at the output when either V_{IH} or V_{IL} is applied to each input terminal such that the output is set to the High level. |
| Low-level output voltage | V_{OL} | The voltage that appears at the output when either V_{IH} or V_{IL} is applied to each input terminal such that the output is set to the Low level. |
| Power-off leakage current | I_{OFF} | The leakage current that flows into an IC via input and output terminals when the power supply is off. |
| Input leakage current | I_{IN} | The leakage current that flows through the input terminal when a voltage is present at the input terminal of an IC. |
| Output off-state leakage current | I_{OZ} | The leakage current of an IC with an open-drain output that flows through the output terminal when it is in the high-impedance state. |
| Output leakage current (Power-off) | I_{OPD} | The leakage current that flows into an IC via the output terminals when V_{CC} is the off state ($V_{CC}=0$ V) |
| 3-state output off-state leakage current | I_{OZ} | The leakage current of an IC with an open-drain or three-state output that flows through the output terminal when it is in the high-impedance state. |

| Parameter | Symbol | Definition |
|--|-----------------|--|
| Input/output leakage current (Switch off) | I_{OFF} | The leakage current that flows through an IC from the input terminals to the output terminal when the power supply is off. |
| Input/output leakage current (Switch on) | $I_{I/O}$ | The leakage current that flows from the input terminal to the output terminal in the switch-on and open-output states. |
| Control input leakage current | I_{IN} | The leakage current that flows through the control input terminal of IC when a voltage is applied to the terminal. |
| RX/CX terminal off-state current | I_{IN} | The current that flows through the RX/CX terminal of a multivibrator IC when a voltage is applied to the terminal. |
| T2 terminal input leakage current | I_{IN} | The current that flows through the T2 terminal of a multivibrator IC when a voltage is applied to the terminal. |
| Quiescent supply current | I_{CC} | The current that flows into an IC via the V_{CC} terminal when the V_{CC} or ground level is held constant without changing the input voltage. |
| | ΔI_{CC} | The current that flows into an IC via the V_{CC} terminal when $V_{CC} - 0.6$ V is applied to one input terminal. |
| | I_{CCT} | The current that flows into an IC with TTL-level input via the V_{CC} terminal when a TTL-level voltage is applied to one input terminal. |
| Active-state supply current (per circuit) | $I_{CC(opr)}$ | The average current that flows in the no-load condition between the power supply and ground terminals due to an internal circuit operation. |
| On-resistance | R_{ON} | The resistance between the input and the output of an analog switch, multiplexer or demultiplexer IC in the switch-on state. |
| Difference of on-resistance between switches | ΔR_{ON} | The difference in on-resistance between different input-output pairs of an analog switch, multiplexer or demultiplexer IC. |

| Parameter | Symbol | Definition |
|------------------------|--------------------------|--|
| Minimum pulse width | $t_{w(H)}$ $t_{w(L)}$ | The minimum pulse width that is accepted at a clock input, etc. as a normal pulse. |
| Minimum setup time | t_s | The time interval during which data must be stable before the associated input (e.g., clock) changes. For example, when data is latched on the rising edge of a clock pulse, it is necessary to apply data at least t_s before the rising edge of the clock. |
| Minimum hold time | t_h | The time interval during which data must be stable after the active transition of the associated input (e.g., clock). |
| Minimum removal time | t_{rem} | The minimum time between the release of an asynchronous input (e.g., Clear, Preset) and the application of the next input (e.g., clock). |
| Minimum retrigger time | t_{rr} | The minimum time necessary for a multivibrator IC to accept the next trigger signal after having received one. |
| Output transition time | t_{TLH} t_{THL} | <p>The rise and fall times of the output voltage. t_{TLH} is the time from 10% to 90% when the output transitions from Low to High, and t_{THL} is the time from 90% to 10% when the output transitions from High to Low.</p>  |

| Parameter | Symbol | Definition |
|------------------------|------------------------|--|
| Propagation delay time | t_{PLH} t_{PHL} | <p>The delay time between the application of an input signal and an output response. t_{PLH} is defined as the time required for an output to transition from Low to High, and t_{PHL} is defined as the time required for an output to transition from High to Low.</p> <p>HC / VHC series</p>  <p>HCT series</p>  <p>VHCT series</p>  |

| Parameter | Symbol | Definition |
|---|--|---|
| Output enable time Output disable time | t_{PLZ} t_{PHZ} t_{PZL} t_{PZH} | <p>The output enable time is defined as the delay time required for a three-state terminal to be driven High or Low after the output control terminal is set to an inactive level. The output disable time is defined as the delay time required for an output terminal to assume the high-impedance state after the output control signal is set to an active level.</p> <p>HC / VHC series</p> <p>HCT series</p> <p>VHCT series</p> |

| Parameter | Symbol | Definition |
|---|---|--|
| Propagation delay time | Δt_{PD} | For counters ICs, the delay time defined for an IC from when the Qn output is inverted to when the next output (Qn+1) is inverted. |
| Output pulse width | t_{wOUT} | For multivibrator ICs, the width of the output pulse generated when a prescribed external component is connected and a prescribed voltage is applied. |
| Output pulse width error between circuits (in same package) | Δt_{wOUT} | For multivibrator ICs, a difference in output pulse width between two circuits in the same package. |
| Output skew | $t_{oS LH}$ $t_{oS HL}$ $t_{oS ZL}$ | Differences in propagation delay time among output terminals when some outputs in the same package change from the Low level to the High level, from the High level to the Low level, or from the high-impedance state to the Low level. |
| Phase difference between input and output | $\Phi_{I/O}$ | For analog switch, multiplexer and demultiplexer ICs, the delay time from the input to the output when a signal is applied to the input in the switch-on state. |
| Clock frequency | f | The clock frequency at which an IC operates. |
| Maximum clock frequency | f_{MAX} | The maximum clock frequency at which the IC operates normally. |
| Maximum frequency response Phase difference between input and output | $f_{MAX(I/O)}$ f_{MAX} | For analog switch, multiplexer and demultiplexer ICs, the maximum input frequency that the signal can transmit to the output in the switch-on state. |
| Input capacitance | C_{IN} | The capacitance between the input and ground terminals. |
| Control input capacitance | C_{IN} | For analog switch, multiplexer and demultiplexer ICs, the capacitance between the control input and ground terminals. |
| Common terminal capacitance | C_{IS} | For analog switch, multiplexer and demultiplexer ICs, the capacitance between the common and ground terminals in the off state. |
| Switch terminal capacitance | C_{OS} | For analog switch, multiplexer and demultiplexer ICs, the capacitance between the switch and ground terminals in the off state. |

| Parameter | Symbol | Definition |
|--|--------------------------|---|
| Feedthrough capacitance | C_{IOS} | For analog switch, multiplexer and demultiplexer ICs, the capacitance between the switch and common terminals in off state. |
| Bus I/O capacitance | $C_{I/O}$ | The capacitance between the bus and ground terminals. |
| Power dissipation capacitance | C_{PD} | The equivalent internal capacitance of a device calculated by measuring the operating current in the no-load condition. |
| Output capacitance | C_{OUT} | The capacitance between the output and ground terminals for a three-state or open-drain output in the high-impedance state. |
| Sine Wave Distortion | THD | For analog switch, multiplexer and demultiplexer ICs, the distortion rate of the sine wave that is output when a sine wave is input in the on state. |
| Feed-through attenuation (switch off) | FTH | For analog switch, multiplexer and demultiplexer ICs, the ratio of the leakage voltage that appears at the output to the input voltage applied in the off state |
| Crosstalk (control input to signal output) | X_{talk} | For analog switch, multiplexer and demultiplexer ICs, the leakage voltage of a signal to the input and output that occurs when the control input changes. |
| Crosstalk (between any switches) | X_{talk} | For analog switch, multiplexer and demultiplexer ICs, the ratio of the voltage applied to a switch (port) in the on state to the voltage that appears at a switch (port) in the off state |
| Quiet output maximum dynamic VOL | V_{OLP} | The maximum peak voltage induced into an output that is fixed at the Low level when the other outputs are switching simultaneously. |
| Quiet output minimum dynamic VOL | V_{OLV} $ V_{OLV} $ | The minimum peak voltage induced into an output that is fixed at the Low level when the other outputs are switching simultaneously. |
| Quiet output minimum dynamic VOH | V_{OHV} | The minimum peak voltage induced into an output that is fixed at the High level when the other outputs are switching simultaneously. |
| Minimum high-level dynamic input voltage | V_{IHD} | High-level dynamic threshold voltage when all inputs are switching simultaneously |
| Maximum low-level dynamic input voltage | V_{ILD} | Low-level dynamic threshold voltage when all inputs are switching simultaneously. |

4. Built-in Functions

| Parameter | Definition |
|--------------------------|--|
| Input tolerant function | A function designed to prevent a current from flowing from an input to the power supply when the input voltage is higher than the power supply voltage or when $V_{CC} = 0$ V. |
| Output tolerant function | A function designed to prevent a current from flowing from an output to the power supply when the output is in the high-impedance state or when $V_{CC} = 0$ V. |
| Power-down protection | A function designed to prevent a current from flowing to the power supply terminal even if a voltage is applied to the input and output terminals when $V_{CC} = 0$ V. |
| Bus hold function | A function designed to hold the input logic level using a latch circuit even when the input terminal becomes open. |

5 Related LINK

■ Product Line Ups (Catlog)

[Click](#)

■ Product Line Ups (Parametric Search)

[Click](#)

■ Stock Check & Purchase



■ FAQ of Logic ICs

[Click](#)

■ Application Note

[Click](#)

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**